





LT-06

Wi-Fi Light Switch Instruction Manual


Product Configuration & Installation

1.Appearance

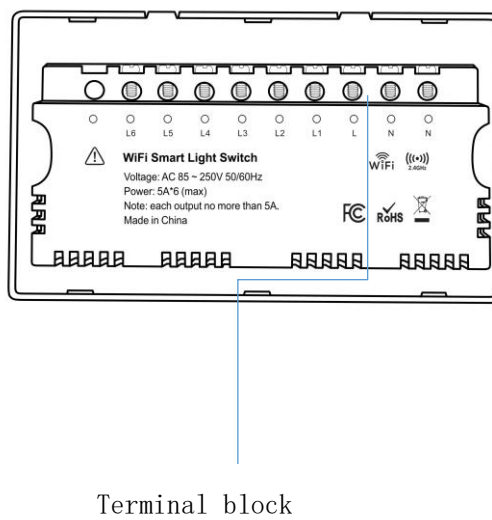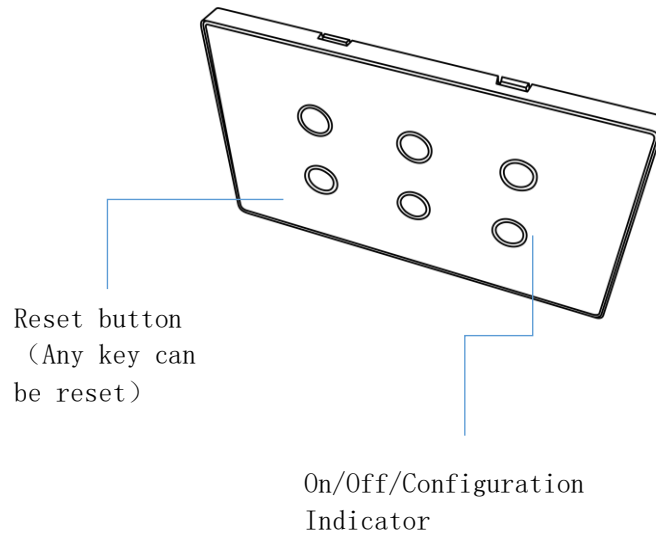

2.Wiring Method

- 1)Connect home live wire to L ;
- 2)Connect home neutral wire and lamp neutral wire to N.(The two N wiring holes are connected);
- 3)Connect lamp① live wire to L1;
- 4)Connect lamp② live wire to L2;
- 5)Connect lamp③ live wire to L3;
- 6)Connect lamp④ live wire to L4;
- 7)Connect lamp⑤ live wire to L5;
- 8)Connect lamp⑥ live wire to L6;

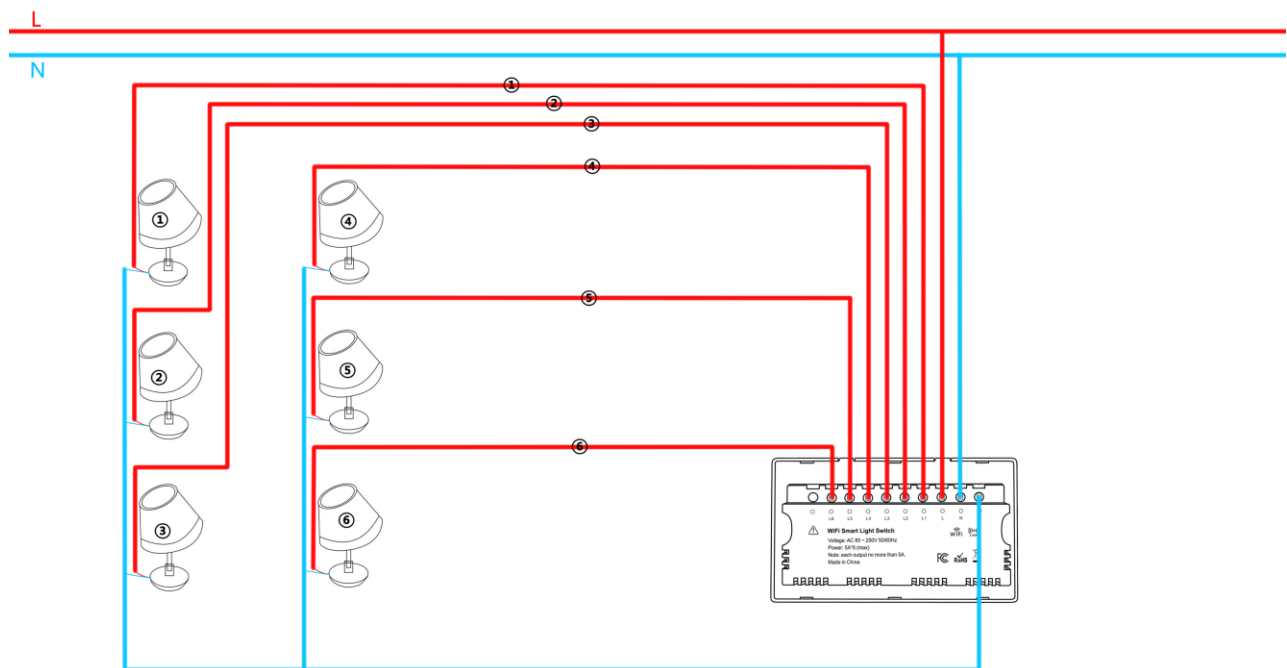

3.Installation Precautions

- (1) This product with neutral wire and live wire, please remember to connect the neutral (N) wire when wiring.
- (2) Please installers strictly follow the installation instructions for wiring, there is a risk of high voltage, please pay attention to safety!

Specification

Product name: Wi-Fi Light Control
Input voltage: AC 85~250V 50/60Hz
Working current: Maximum 5A for single channel
Standby power: 0.5W
Max wireless distance: 45M open area
Wi-Fi standard: IEEE 802.11b/g/n
Wi-Fi type: 2.4GHz
Bluetooth version: Bluetooth 5.0
Operating mode: Touch-sensitive
Material: Tempered Glass Panel+Fireproof housing
Working temperature: 0°C ~ 60°C (32°F~140°F)
Working humidity: 1% ~ 85%RH(non-condensable)
Size: 147mm * 86mm * 38mm
Weight: 216g

LED State

Device Status	LED State
Smart Wi-Fi mode/Bluetooth mode	Indicator light flashes twice a second
AP mode/Bluetooth mode	Indicator light flashes once in 2 seconds
Reset/Toggle Add Mode	Press and hold any buttons for 7 seconds

Download APP

1. Android system: Download the "Smart life" app from Google Play to your mobile.
2. IOS system :Download the "Smart life" app from APP Store to your mobile.
3. Run the app, register and log in to your account.



Smart Life



+965 1880005




www.xontel.com




kuwait@xontel.com

Add Device

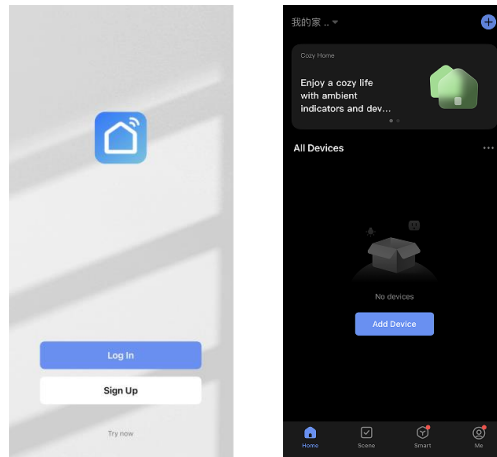


The device is powered on in smart wifi mode by default; if the reset button indicator does not light up, please long press any switch button for 7 seconds, and then add the device again.

1. Select the device type to add

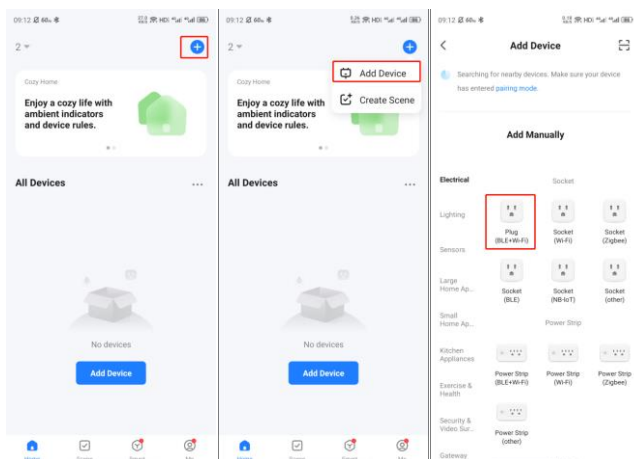


2. Bluetooth Add (this method is recommended for adding)

(1) Method 1: Open the cell phone Bluetooth to add the device through Bluetooth mode (pending mode can be added by Bluetooth)

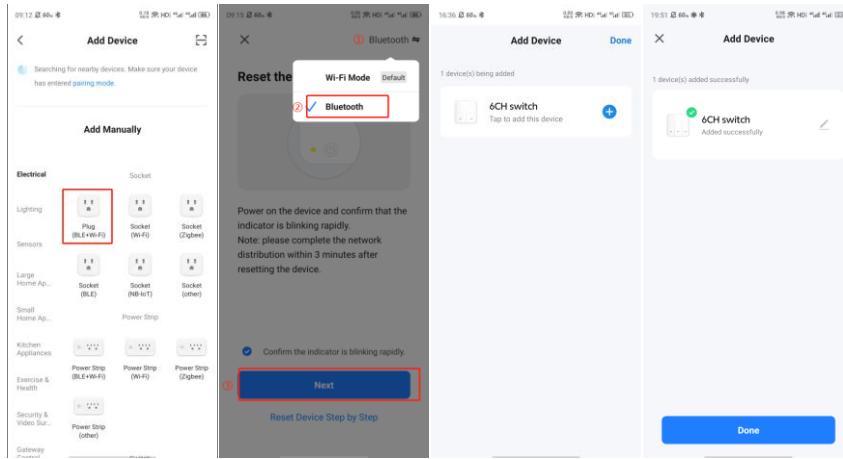


(2) Method 2: Turn on the Bluetooth, enter the APP interface, the device will be automatically searched by Bluetooth, and then click to add it.

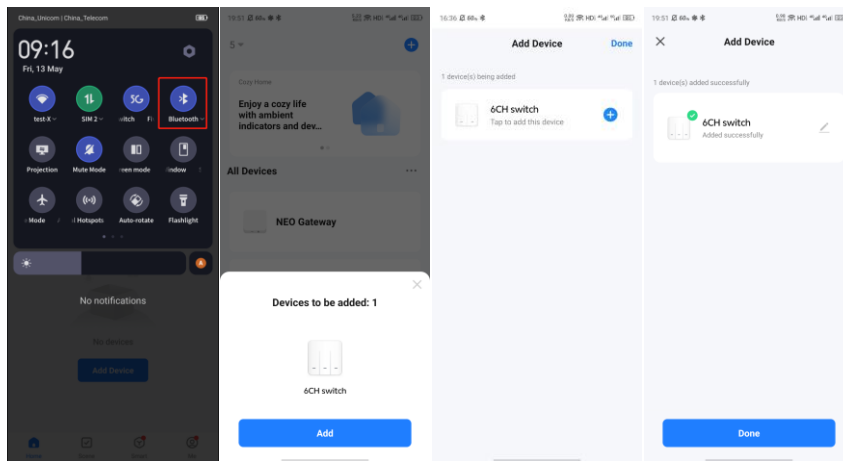


3. Smart Wi-Fi mode

Long press any keys until the indicator light blinks fast (smart Wi-Fi mode), then add (please follow the APP prompts).

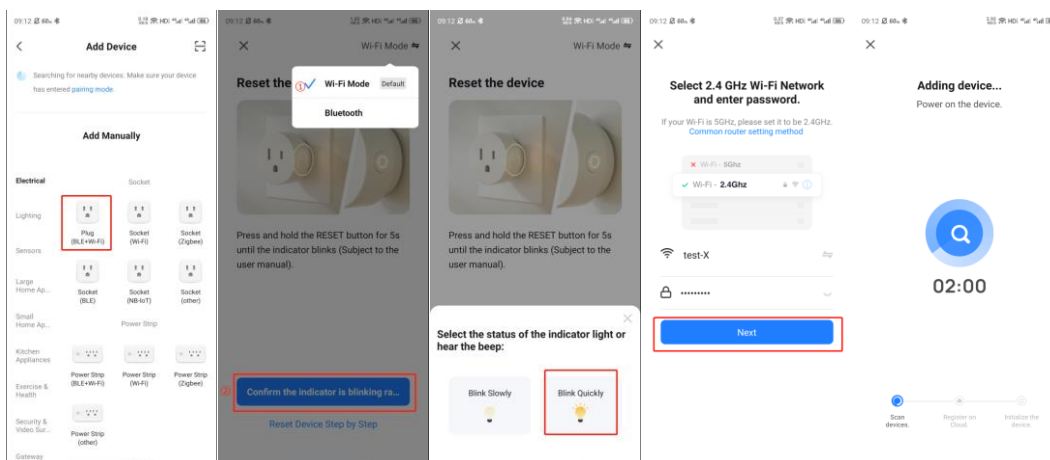

4.AP mode

Long press any keys until the indicator light flashes slowly (AP mode), then add.(Please follow the APP prompts)

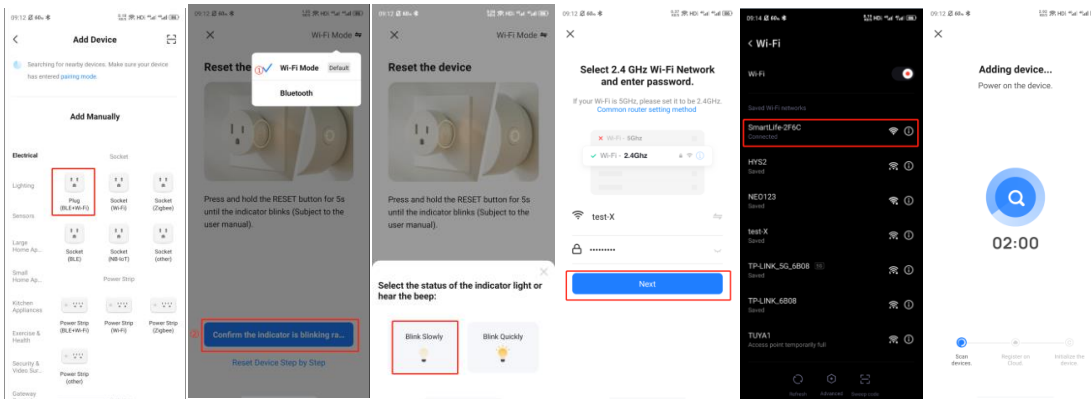


Main Functions/Setting

Main Interface



1.On/Off Control/Status Display/Personalized Naming

- (1) On/Off Control/Status Display; The icon is on when it is on, the icon is off when it is off.
- (2) Long press the switch button in the APP to change the switch name.

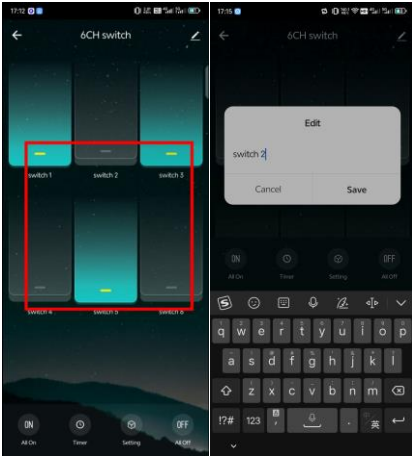


2. One-touch control to turn all on or off.




3. Timing function


① Count down

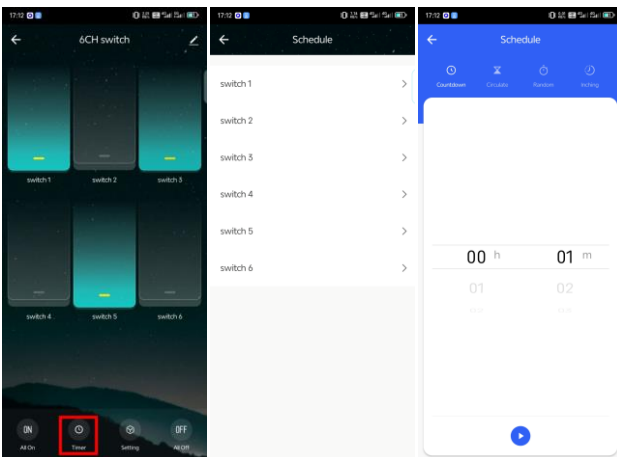


② Recurring timer

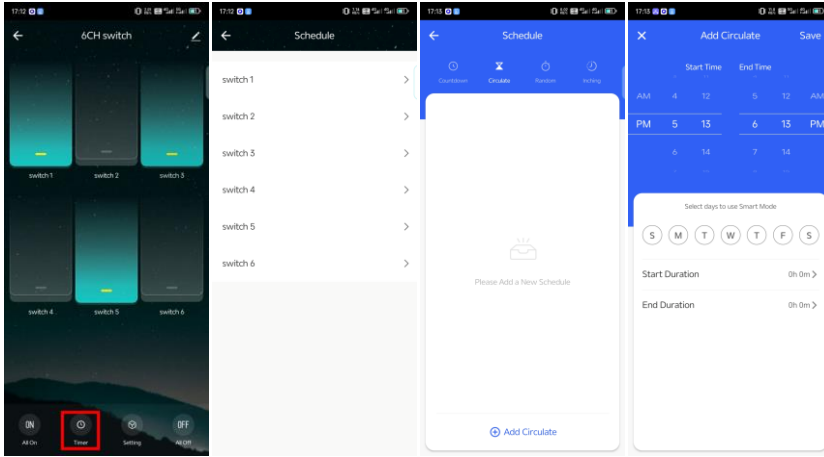

③ Randomized timing

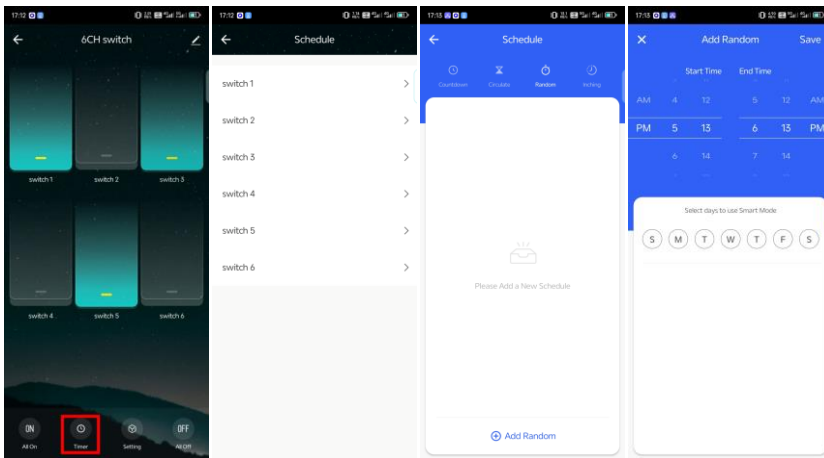


④ Inching

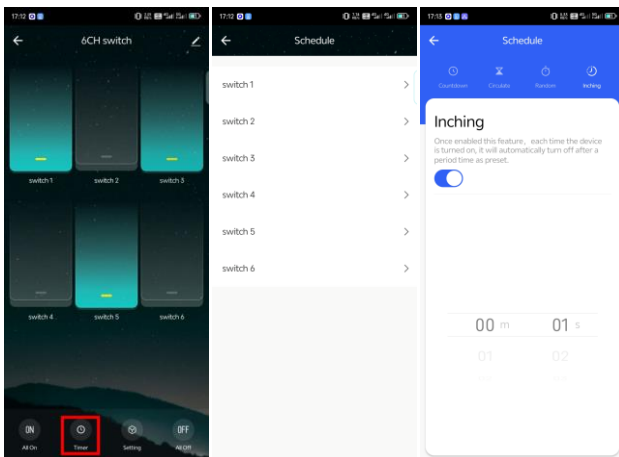


4. Setting

① Master switch (Turn all switch on/off)

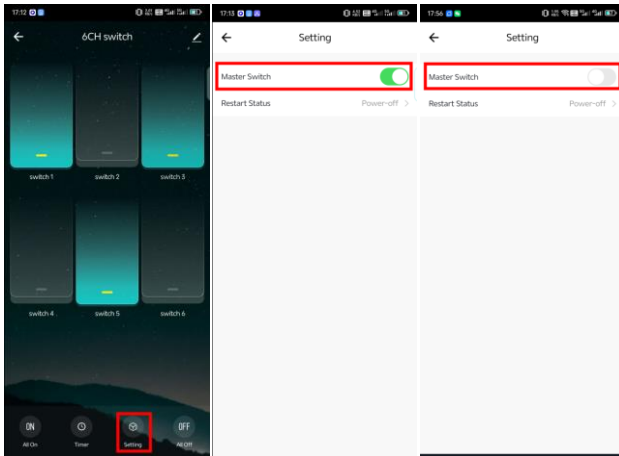

② Restart Status

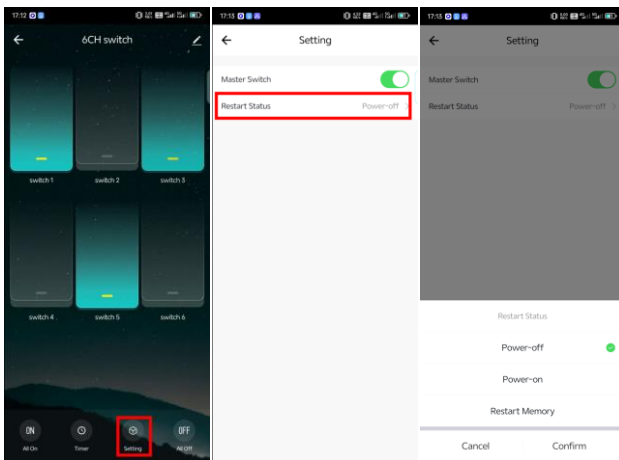


Other function

1. Bluetooth control


Automatically switch to Bluetooth control when the network on the device or APP side is abnormal.

2. Share Device


(1) Individual device sharing

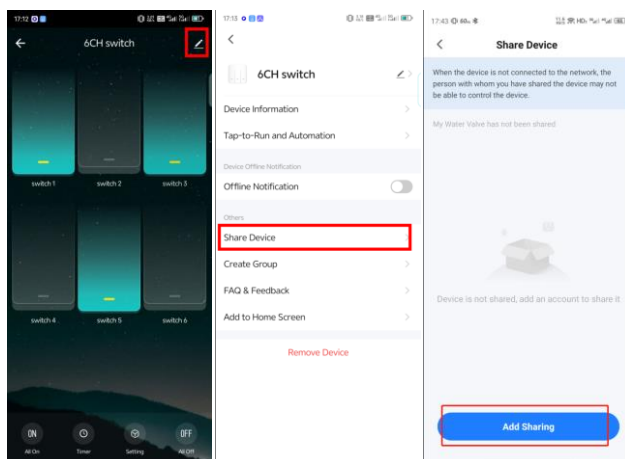

(2) Family group sharing

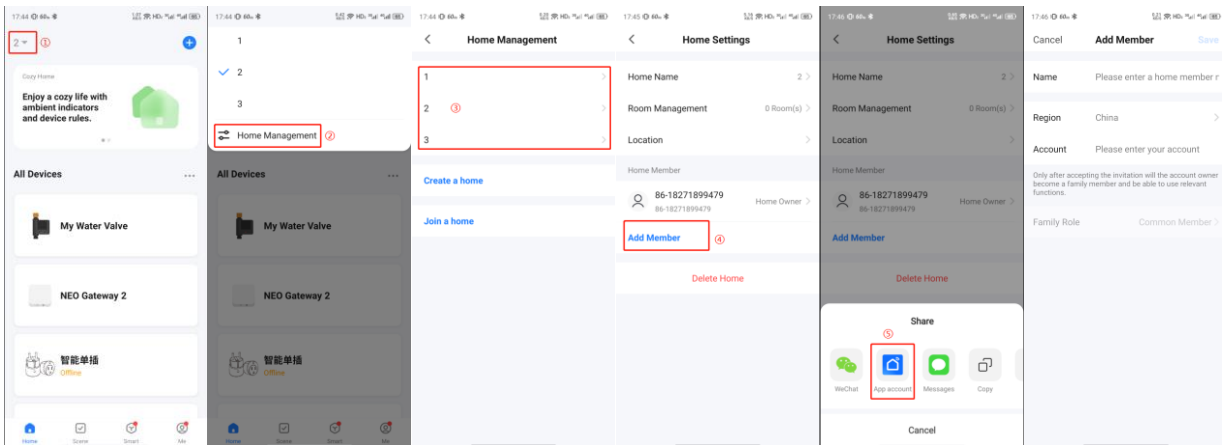

3. Linkage (Example: switch 2 is turned on when the human presence sensor detects someone)

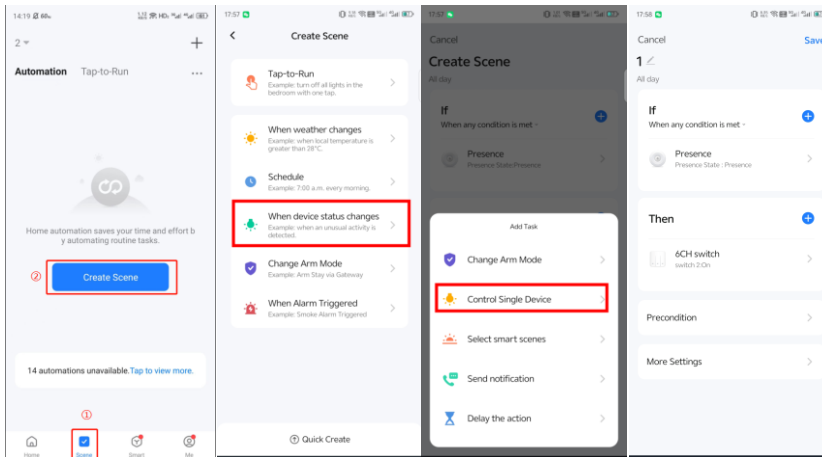

4. Clearing records;

Remove the device through the app and add the device again to clear the history.

