



# TEST REPORT

**Report No.** .....: **CTC2024287503**


**Applicant** .....: **XonTel Technology Trd. Co. W.L.L**

Address.....: Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait

Manufacturer.....: XonTel Technology Trd. Co. W.L.L

Address.....: Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait

**Product Name** .....: **Prime Business Phone**

Trade Mark .....: 

Model/Type reference.....: XT-24G

Listed Model(s).....: /

**Standard** .....: **ETSI EN 300 328 V2.2.2: 2019-07**

Test Report Form No .....: CTC-TR-051\_A1

Master TRF .....: Dated 2024-09-20

Date of receipt of test sample...: Jan. 18, 2022

Date of testing.....: Jan. 19, 2022 ~ Feb. 21, 2022

Date of issue.....: Dec. 20, 2024


**Result**.....: **PASS**

Compiled by:  
(Printed name+signature)                      Jim Jiang                      *Jim Jiang*

---

Supervised by:  
(Printed name+signature)                      Eric Zhang                      *Eric Zhang*

---

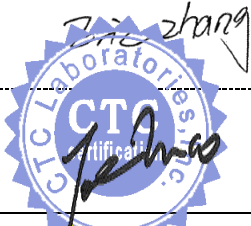Approved by:  
(Printed name+signature)                      Totti Zhao                      

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Table of Contents

Page

- 1. TEST SUMMARY ..... 3
  - 1.1. TEST STANDARDS..... 3
  - 1.2. REPORT VERSION..... 3
  - 1.3. TEST DESCRIPTION..... 4
  - 1.4. TEST FACILITY ..... 5
  - 1.5. MEASUREMENT UNCERTAINTY ..... 5
  - 1.6. ENVIRONMENTAL CONDITIONS ..... 6
- 2. GENERAL INFORMATION ..... 7
  - 2.1. CLIENT INFORMATION ..... 7
  - 2.2. GENERAL DESCRIPTION OF EUT ..... 7
  - 2.3. ACCESSORY EQUIPMENT INFORMATION ..... 10
  - 2.4. MEASUREMENT INSTRUMENTS LIST ..... 11
- 3. TEST ITEM AND RESULTS ..... 12
  - 3.1. RF OUTPUT POWER ..... 12
  - 3.2. DUTY CYCLE, TX-SEQUENCE, TX-GAP ..... 14
  - 3.3. ACCUMULATED TRANSMIT TIME, MINIMUM FREQUENCY OCCUPATION AND HOPPING SEQUENCE..... 15
  - 5.1. HOPPING FREQUENCY SEPARATION ..... 20
  - 3.4. MEDIUM UTILISATION (MU) FACTOR ..... 22
  - 3.5. OCCUPIED CHANNEL BANDWIDTH ..... 23
  - 3.6. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN ..... 25
  - 3.7. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN-CONDUCTED MEASUREMENTS..... 30
  - 3.8. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN-RADIATED MEASUREMENTS ..... 32
  - 3.9. RECEIVER SPURIOUS EMISSIONS-CONDUCTED MEASUREMENTS..... 37
  - 3.10. RECEIVER SPURIOUS EMISSIONS-RADIATED MEASUREMENTS ..... 39
  - 3.11. ADAPTIVITY ..... 44
  - 3.12. RECEIVER BLOCKING ..... 49
- 4. EUT TEST PHOTOS..... 52





# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[ETSI EN 300 328 V2.2.2 \(2019-07\)](#)–Wideband transmission systems; Data transmission equipment operating in the 2.4 GHz ISM band and using wide band modulation techniques; Harmonised Standard for access to radio spectrum

## 1.2. Report version

| Revised No. | Report No.    | Date of issue | Description   |
|-------------|---------------|---------------|---|
| 01          | CTC2024287503 | Dec. 20, 2024 | On the basis of the original report CTC20220136E08, update the applicant, manufacturer, trademark and model number., no testing involved. |
|             |               |               |   |
|             |               |               |   |





### 1.3. Test Description

| Radio Spectrum Matter (RSM) Part of Transmitter                              |                 |        |               |
|--|-----------------|--------|---------------|
| Test Item  | Test require    | Result | Test Engineer |
| RF output power  | clause 4.3.1.2  | Pass   | Alicia Liu    |
| Duty Cycle, Tx-sequence, Tx-gap  | clause 4.3.1.3  | N/A    | N/A           |
| Accumulated Transmit Time, Minimum Frequency Occupation and Hopping Sequence | clause 4.3.1.4  | Pass   | Alicia Liu    |
| Hopping Frequency Separation   | clause 4.3.1.5  | Pass   | Alicia Liu    |
| Medium Utilisation (MU) factor   | clause 4.3.1.6  | N/A    | N/A           |
| Adaptivity   | clause 4.3.1.7  | N/A    | N/A           |
| Occupied Channel Bandwidth   | clause 4.3.1.8  | Pass   | Alicia Liu    |
| Transmitter unwanted emissions in the out-of-band domain                     | clause 4.3.1.9  | Pass   | Alicia Liu    |
| Transmitter unwanted emissions in the spurious domain                        | clause 4.3.1.10 | Pass   | Alicia Liu    |
| Radio Spectrum Matter (RSM) Part of Receiver                                 |                 |        |               |
| Test Item  | Test require    | Result | Test Engineer |
| Receiver spurious emissions  | clause 4.3.1.11 | Pass   | Alicia Liu    |
| Receiver Blocking  | clause 4.3.1.12 | Pass   | Alicia Liu    |
| Geo-location capability  | clause 4.3.1.13 | N/A    | N/A           |

Note:

1. The measurement uncertainty is not included in the test result.
2. "N/A": means this test item is not applicable for this device according to the technology characteristic of device.





## 1.4. Test Facility

### CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.





| Test Items   | Measurement Uncertainty | Notes |
|--|-------------------------|-------|
| Maximum transmit power   | ±1.5dB                  | (1)   |
| Power Spectral Density   | ±1.5dB                  | (1)   |
| Duty Cycle, Tx-sequence, Tx-gap                                      | ±5%                     | (1)   |
| Accumulated Transmit Time, Frequency Occupation and Hopping Sequence | ±5%                     | (1)   |
| Hopping Frequency Separation   | ±5%                     | (1)   |
| Medium Utilisation (MU) factor                                       | ±5%                     | (1)   |
| Adaptively   | ±5%                     | (1)   |
| Occupied Channel Bandwidth   | ±5%                     | (1)   |
| Transmitter unwanted emissions in the out-of-band domain             | ±2.8dB                  | (1)   |
| Transmitter unwanted emissions in the spurious domain                | ±2.8dB                  | (1)   |
| Receiver spurious emissions  | ±2.8dB                  | (1)   |
| Receiver Blocking  | ±2.8dB                  | (1)   |

**Note (1):** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 1.6. Environmental conditions

|                          |                   |   |
|--------------------------|-------------------|---|
| <b>Normal Condition</b>  | Temperature       | 25 °C   |
|                          | Relative humidity | 55 %  |
|                          | Voltage           | The equipment shall be the nominal voltage for which the equipment was designed.                                |
| <b>Extreme Condition</b> | Temperature       | Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer |
|                          | Voltage           | Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer |

|                          |                                    |       |
|--------------------------|------------------------------------|-------|
| <b>Normal Condition</b>  | T <sub>N</sub> =Normal Temperature | 25 °C |
| <b>Extreme Condition</b> | T <sub>L</sub> =Lower Temperature  | 0 °C  |
|                          | T <sub>H</sub> =Higher Temperature | 45 °C |

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)




## 2. GENERAL INFORMATION

### 2.1. Client Information

|               |  |
|---------------|--|
| Applicant:    | XonTel Technology Trd. Co. W.L.L   |
| Address:      | Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait |
| Manufacturer: | XonTel Technology Trd. Co. W.L.L   |
| Address:      | Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait |

### 2.2. General Description of EUT

|                                      |  |
|--------------------------------------|--|
| Product Name:                        | Prime Business Phone   |
| Trade Mark:                          |                             |
| Model/Type reference:                | XT-24G   |
| Listed Model(s):                     | /  |
| Power supply:                        | 5Vdc/2A from AC/DC Adapter<br>48Vdc/0.3A from POE  |
| Adapter 1 Model:                     | F12W8-050200SPAV<br>Input: 100-240V~ 50/60Hz 0.6A<br>Output: 5Vdc/2A   |
| Adapter 2 Model:                     | F12W8-050200SPAB<br>Input: 100-240V~ 50/60Hz 0.6A<br>Output: 5Vdc/2A   |
| Adapter 3 Model:                     | F12W8-050200SPAS<br>Input: 100-240V~ 50/60Hz 0.6A<br>Output: 5Vdc/2A   |
| Adapter Difference:                  | All these models are identical in the same PCB, Layout and electrical circuit, The only difference is plugs. |
| Hardware version:                    | V1.0   |
| Software version:                    | T0.0.9.5.1   |
| Antenna type:                        | FPC Antenna  |
| Antenna gain:                        | 5dBi   |
| <b>Technical index for Bluetooth</b> |  |
| Supported type:                      | Bluetooth 5.0  |
| Modulation:                          | GFSK, $\pi/4$ -DQPSK, 8-DPSK   |
| Operation frequency:                 | 2402MHz~2480MHz  |
| Channel number:                      | 79   |
| Channel separation:                  | 1MHz   |
| Test frequency:                      | CH00: 2402MHz      CH39: 2441MHz      CH78: 2480MHz  |
| Modulation:                          | <input checked="" type="checkbox"/> FHSS <input type="checkbox"/> Other forms of modulation                  |

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)



|                                    |   |   |
|------------------------------------|---|---|
|                                    | GFSK  |   |
| Type of Equipment:                 | <input checked="" type="checkbox"/> Stand-alone   | <input type="checkbox"/> Combined Equipment |
|                                    | <input type="checkbox"/> Plug-in radio device   | <input type="checkbox"/> Other              |
| Adaptive / non-adaptive equipment: | <input type="checkbox"/> Non-adaptive Equipment<br><input checked="" type="checkbox"/> Adaptive Equipment without the possibility to switch to a non-adaptive mode<br><input type="checkbox"/> Adaptive Equipment which can also operate in a non-adaptive mode   |   |
| Receiver categories:               | <input type="checkbox"/> Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.   |   |
|                                    | <input checked="" type="checkbox"/> Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.  |   |
|                                    | <input type="checkbox"/> Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.   |   |
| Operating mode:                    | <input checked="" type="checkbox"/> Single Antenna Equipment<br><input checked="" type="checkbox"/> Equipment with only 1 antenna<br><input type="checkbox"/> Equipment with 2 diversity antennas but only 1 antenna active at any moment in time<br><input type="checkbox"/> Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. |   |
|                                    | <input type="checkbox"/> Smart Antenna Systems - Multiple Antennas without beam forming<br><input type="checkbox"/> Single spatial stream / Standard throughput<br><input type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1<br><input type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2                     |   |
|                                    | <input type="checkbox"/> Smart Antenna Systems - Multiple Antennas with beam forming<br><input type="checkbox"/> Single spatial stream / Standard throughput<br><input type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1<br><input type="checkbox"/> High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2                        |   |
| Antenna type:                      | <input checked="" type="checkbox"/> Internal Antenna<br><input type="checkbox"/> Temporary RF connector provided<br><input checked="" type="checkbox"/> No temporary RF connector provided  |   |
|                                    | <input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)<br><input type="checkbox"/> Single power level with corresponding antenna(s)<br><input type="checkbox"/> Multiple power settings and corresponding antenna(s)<br>Number of different Power Levels: .....<br>Power Level 1: ..... dBm   |   |







|  |  |
|--|--|
|  | Power Level 2: ..... dBm<br>Power Level 3: ..... dBm |
|--|--|

| Information is provided by the supplier                            |  |
|--|--|
| <input type="checkbox"/> In case of FHSS modulation:               | <input type="checkbox"/> In case of non-Adaptive Frequency Hopping equipment:<br>The number of Hopping Frequencies: .....<br><br><input type="checkbox"/> In case of Adaptive Frequency Hopping Equipment:<br>The maximum number of Hopping Frequencies: .....<br>The minimum number of Hopping Frequencies: .....<br><br>The Dwell Time: .....<br><br>The Minimum Channel Occupation Time: .....  |
| <input checked="" type="checkbox"/> In case of adaptive equipment: | The Channel Occupancy Time implemented by the equipment:../. ms  |
|  | <input checked="" type="checkbox"/> The equipment has implemented an LBT based DAA mechanism<br>In case of equipment using modulation different from FHSS:<br><input type="checkbox"/> The equipment is Frame Based equipment<br><input checked="" type="checkbox"/> The equipment is Load Based equipment<br><input type="checkbox"/> The equipment can switch dynamically between Frame Based and Load Based equipment<br><br>The CCA time implemented by the equipment: .... μs |
|  | <input type="checkbox"/> The equipment has implemented an non-LBT based DAA mechanism<br><input type="checkbox"/> The equipment can operate in more than one adaptive mode   |
| <input type="checkbox"/> In case of non-adaptive Equipment         | The maximum RF Output Power (e.i.r.p.): ..... dBm<br>The maximum (corresponding) Duty Cycle: ..... %   |





### 2.3. Accessory Equipment information

| Equipment Information |                    |          |              |
|-----------------------|--------------------|----------|--------------|
| Name                  | Model              | S/N      | Manufacturer |
| Notebook              | ThinkBook 14G3 ACL | MP246QDR | Lenovo       |
| /                     | /                  | /        | /            |

| Cable Information |               |              |        |
|-------------------|---------------|--------------|--------|
| Name              | Shielded Type | Ferrite Core | Length |
| /                 | /             | /            | /      |

| Test Software Information |          |   |   |
|---------------------------|----------|---|---|
| Name                      | Versions | / | / |
| SecureCRT.exe             | 8.7.1    | / | / |





## 2.4. Measurement Instruments List

| Tonscend JS0806-2 Test system |                                     |                 |           |            |                  |
|-------------------------------|-------------------------------------|-----------------|-----------|------------|------------------|
| Item                          | Test Equipment                      | Manufacturer    | Model No. | Serial No. | Calibrated until |
| 1                             | Spectrum Analyzer                   | KEYSIGHT        | N9020A    | 100231     | Dec. 23, 2022    |
| 2                             | Spectrum Analyzer                   | Rohde & Schwarz | FUV40-N   | 101331     | Mar. 15, 2022    |
| 3                             | MXG Vector Signal Generator         | Agilent         | N5182A    | MY47420864 | Dec. 23, 2022    |
| 4                             | Signal Generator                    | Agilent         | E8257D    | MY46521908 | Dec. 23, 2022    |
| 5                             | Power Sensor                        | Agilent         | U2021XA   | MY5365004  | Mar. 15, 2022    |
| 6                             | Power Sensor                        | Agilent         | U2021XA   | MY5365006  | Mar. 15, 2022    |
| 7                             | High and low temperature box        | ESPEC           | MT3035    | N/A        | Mar. 24, 2022    |
| 8                             | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500    | 102414     | Dec. 23, 2022    |
| 9                             | 300328 v2.2.2 test system           | TONSCEND        | v2.6      | /          | /                |

| Radiated emission(3m chamber 2) |                          |              |            |            |                  |
|---------------------------------|--------------------------|--------------|------------|------------|------------------|
| Item                            | Test Equipment           | Manufacturer | Model No.  | Serial No. | Calibrated Until |
| 1                               | Trilog-Broadband Antenna | Schwarzbeck  | VULB 9168  | 9168-1013  | Jan. 12, 2023    |
| 2                               | Horn Antenna             | Schwarzbeck  | BBHA 9120D | 9120D-647  | Dec. 23, 2022    |
| 3                               | Spectrum Analyzer        | R&S          | FSU26      | 100105     | Dec. 23, 2022    |
| 4                               | Spectrum Analyzer        | R&S          | FSV40-N    | 101331     | Mar. 15, 2022    |
| 5                               | Pre-Amplifier            | SONOMA       | 310        | 186194     | Dec. 23, 2022    |
| 6                               | Low Noise Pre-Amplifier  | EMCI         | EMC051835  | 980075     | Dec. 23, 2022    |
| 7                               | Test Receiver            | R&S          | ESC17      | 100967     | Dec. 23, 2022    |

| Radiated emission(3m chamber 3) |                              |              |            |            |                  |
|---------------------------------|------------------------------|--------------|------------|------------|------------------|
| Item                            | Test Equipment               | Manufacturer | Model No.  | Serial No. | Calibrated Until |
| 1                               | Trilog-Broadband Antenna     | Schwarzbeck  | VULB 9168  | 9168-759   | Nov. 09, 2022    |
| 2                               | Horn Antenna                 | Schwarzbeck  | BBHA 9120D | 9120D-647  | Dec. 23, 2022    |
| 3                               | Test Receiver                | Keysight     | N9038A     | MY56400071 | Dec. 23, 2022    |
| 4                               | Broadband Premplifier        | SCHWARZBECK  | BBV9743B   | 259        | Dec. 23, 2022    |
| 5                               | Mirowave Broadband Amplifier | SCHWARZBECK  | BBV9718C   | 111        | Dec. 23, 2022    |

Note: The cable loss has calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS


#### 3.1. RF Output Power

##### Limit

##### ETSI EN 300 328 Sub-clause 4.3.2.2.3

1. For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.
2. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

##### Test Configuration

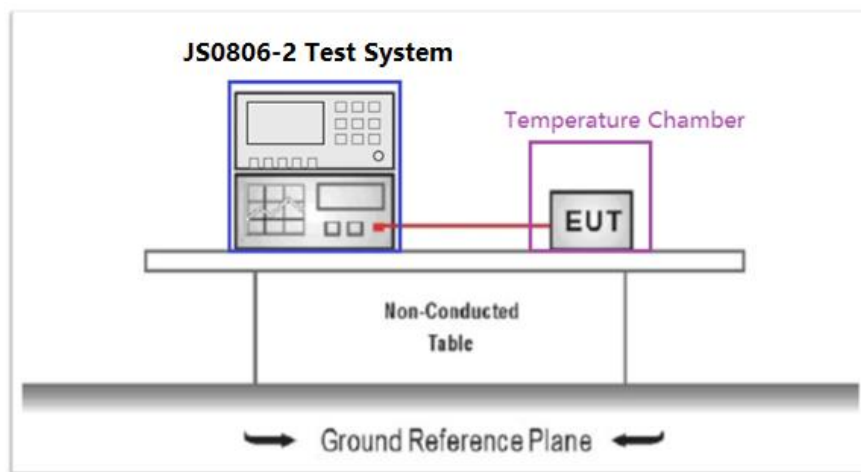

##### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.2.2.1 for the measurement method.

##### Test Results



| Test conditions  | Modulation     | EIRP (dBm) | Limit (dBm) | Result |
|------------------|----------------|------------|-------------|--------|
| Temperature (°C) |                |            |             |        |
| T <sub>N</sub>   | GFSK           | 9.27       | 20.00       | Pass   |
|                  | $\pi/4$ -DQPSK | 9.58       |             |        |
|                  | 8-DPSK         | 9.51       |             |        |
| T <sub>L</sub>   | GFSK           | 9.14       |             |        |
|                  | $\pi/4$ -DQPSK | 9.24       |             |        |
|                  | 8-DPSK         | 9.40       |             |        |
| T <sub>H</sub>   | GFSK           | 9.19       |             |        |
|                  | $\pi/4$ -DQPSK | 9.56       |             |        |
|                  | 8-DPSK         | 9.41       |             |        |

Note:

- 1) Test bursts: 13.
- 2) Measured Power (EIRP) include the cable loss and antenna gain.


## 3.2. Duty Cycle, Tx-sequence, Tx-gap

### Limit

#### ETSI EN 300 328 V2.2.2 Sub-clause 4.3.1.3.3 & 4.3.2.4.3

1. For non-adaptive FHSS equipment, the Duty Cycle shall be equal to or less than the maximum value declared by the supplier. In addition, the maximum Tx -sequence time shall be 5 ms while the minimum Tx-gap time shall be 5 ms.
2. For equipment using wide band modulations other than FHSS, the Duty Cycle shall be equal to or less than the maximum value declared by the supplier.  
The Tx-sequence time shall be equal to or less than 10 ms. The minimum Tx-gap time following a Tx-sequence shall be equal to the duration of that proceeding Tx-sequence with a minimum of 3,5 ms.

### Test Configuration

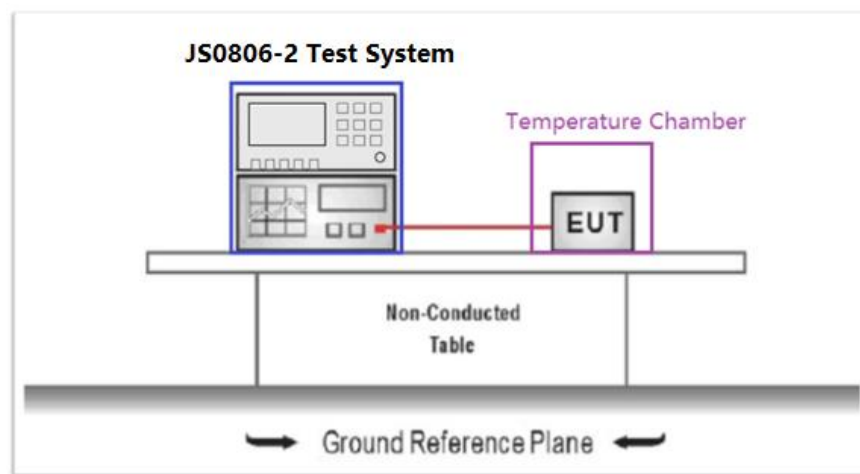

### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.2.2.1.3 for the measurement method.

### Test Results

Not applicable to this device which was adaptive equipment and cannot operate in a non-adaptive mode.


### 3.3. Accumulated Transmit Time, Minimum Frequency Occupation and Hopping Sequence

#### Limit

##### ETSI EN 300 328 Sub-clause 4.3.1.4.3

1. Adaptive Frequency Hopping systems shall be capable of operating over a minimum of 70 % of the band specified in the band 2,4 GHz to 2,4835 GHz.
2. The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.
3. The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

#### Test Configuration

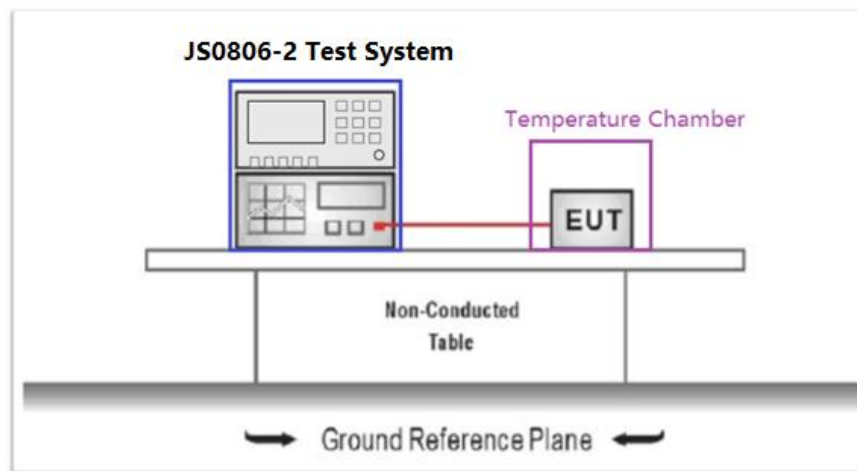

#### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.4.2.1 for the measurement method.

#### Test Result



## ◆ Accumulated Transmit Time

| Modulation     | Channel | Accumulated Transmit Time (ms) | Limit (ms) | Result |
|----------------|---------|--------------------------------|------------|--------|
| GFSK           | CH00    | 279.151                        | 400        | Pass   |
|                | CH78    | 298.112                        | 400        | Pass   |
| $\pi/4$ -DQPSK | CH00    | 322.340                        | 400        | Pass   |
|                | CH78    | 314.967                        | 400        | Pass   |
| 8-DPSK         | CH00    | 319.180                        | 400        | Pass   |
|                | CH78    | 323.394                        | 400        | Pass   |

## ◆ Frequency Occupation

| Modulation     | Channel | Frequency occupation Number (pcs) | Limit (pcs) | Result |
|----------------|---------|-----------------------------------|-------------|--------|
| GFSK           | CH00    | 4                                 | $\geq 1$    | Pass   |
|                | CH78    | 1                                 |             | Pass   |
| $\pi/4$ -DQPSK | CH00    | 2                                 |             | Pass   |
|                | CH78    | 1                                 |             | Pass   |
| 8-DPSK         | CH00    | 2                                 |             | Pass   |
|                | CH78    | 2                                 |             | Pass   |

## ◆ Hopping Sequence

| Modulation     | Number of Hopping Channel | Limit     | Band Allocation (%) | Limit Band Allocation (%) | Result |
|----------------|---------------------------|-----------|---------------------|---------------------------|--------|
| GFSK           | 79                        | $\geq 15$ | 96.05               | $\geq 70\%$               | Pass   |
| $\pi/4$ -DQPSK | 79                        |           | 96.15               |                           |        |
| 8-DPSK         | 79                        |           | 96.10               |                           |        |







Test plot as follows:

### Accumulated Transmit Time

#### GFSK

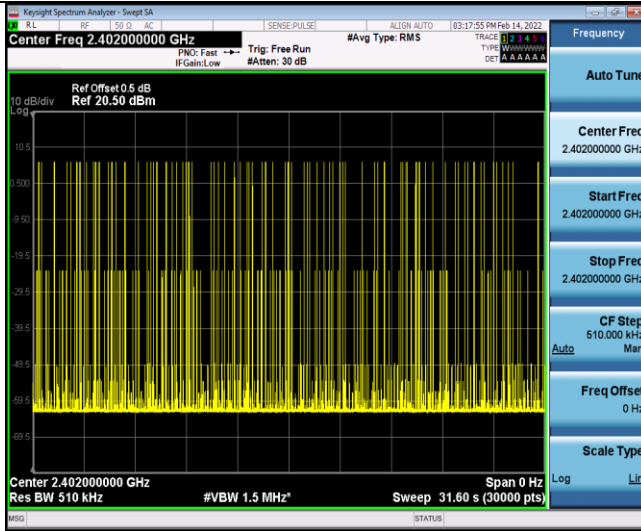


CH00

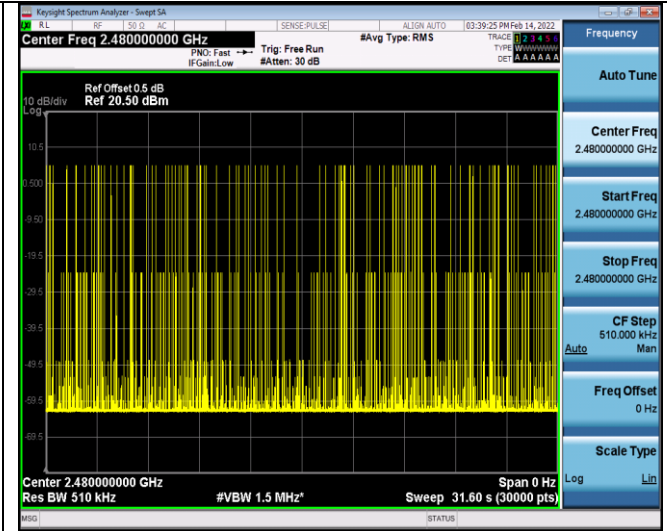


CH78

#### π/4-DQPSK

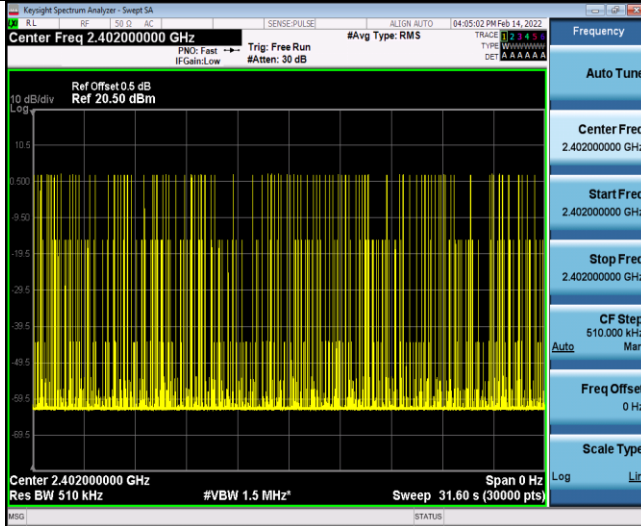


CH00

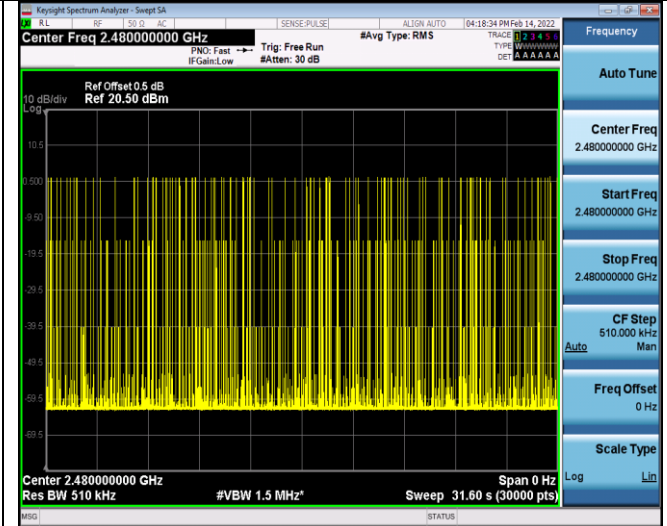


CH78

#### 8-DSPSK

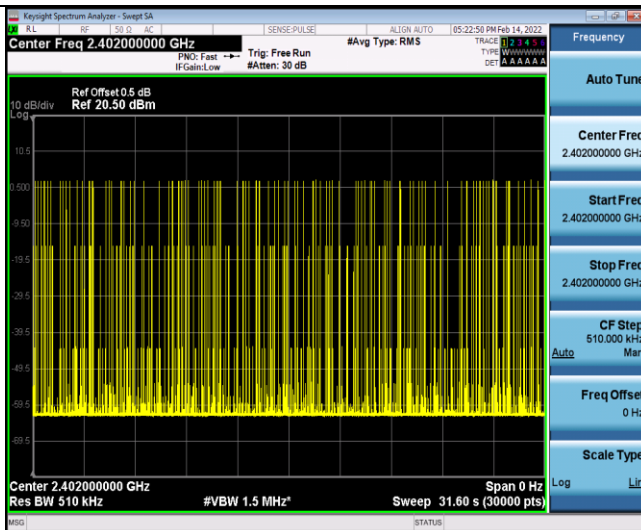

CH00

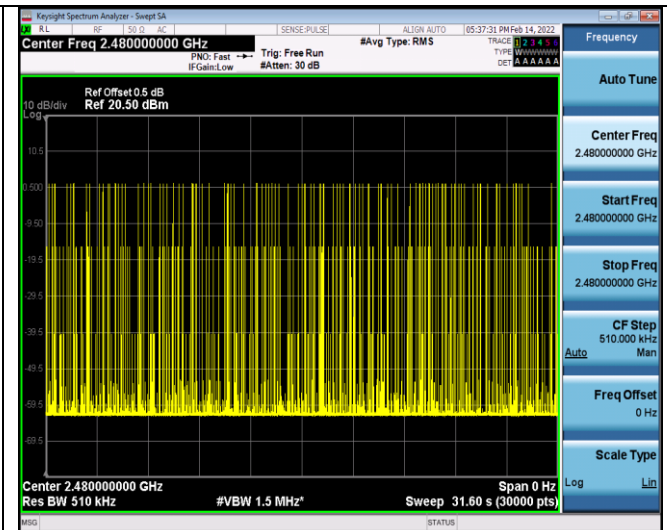

CH78

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)






### Frequency Occupation

#### GFSK

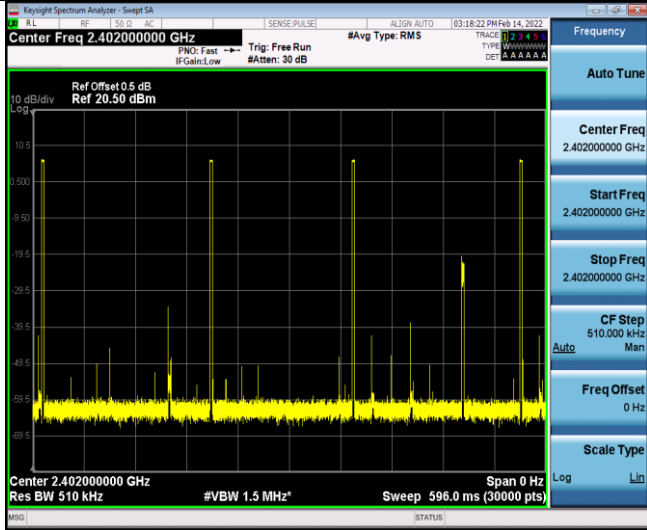


CH00

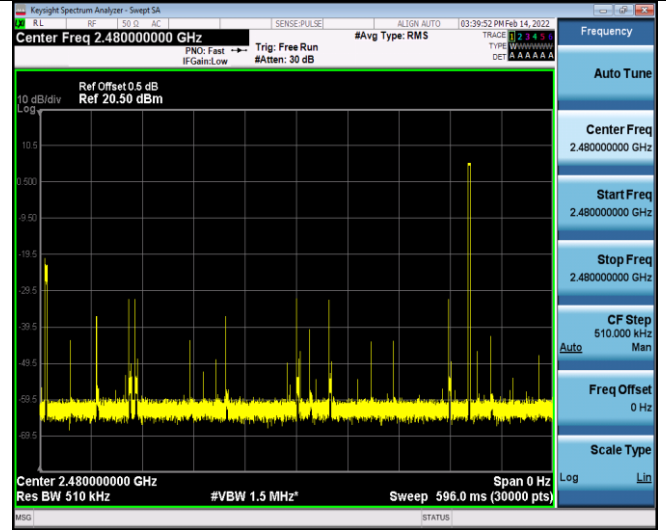


CH78

#### $\pi/4$ -DQPSK

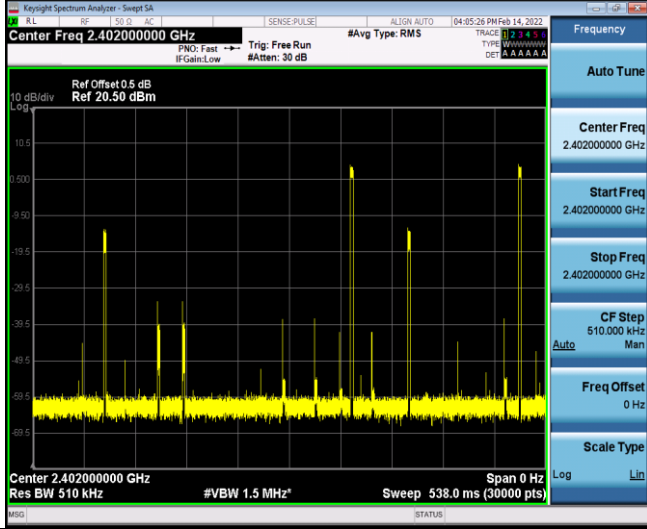


CH00

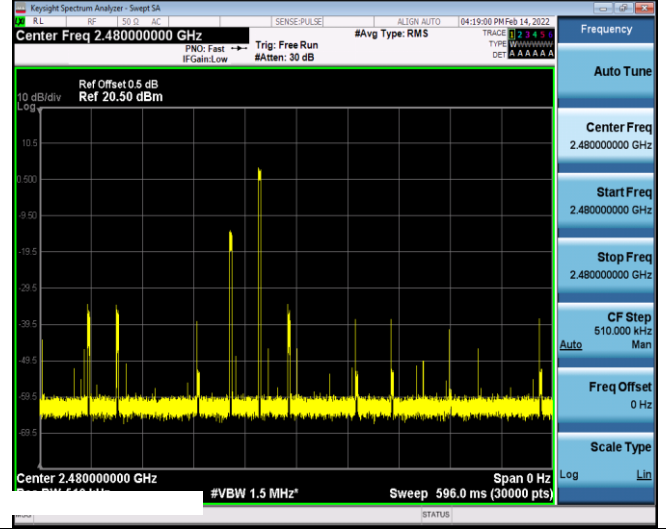


CH78

#### 8-DSPSK

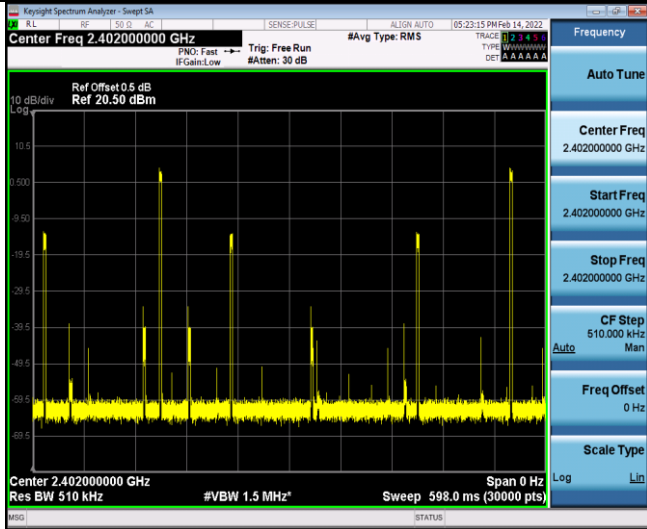

CH00

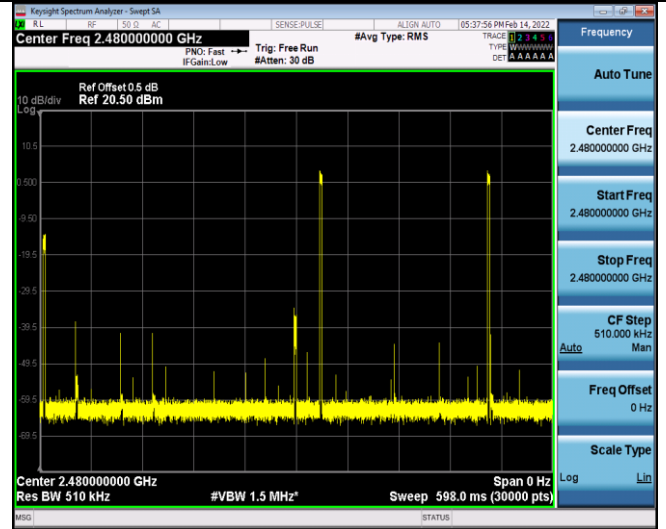

CH78

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)




### Hopping Sequence


#### GFSK

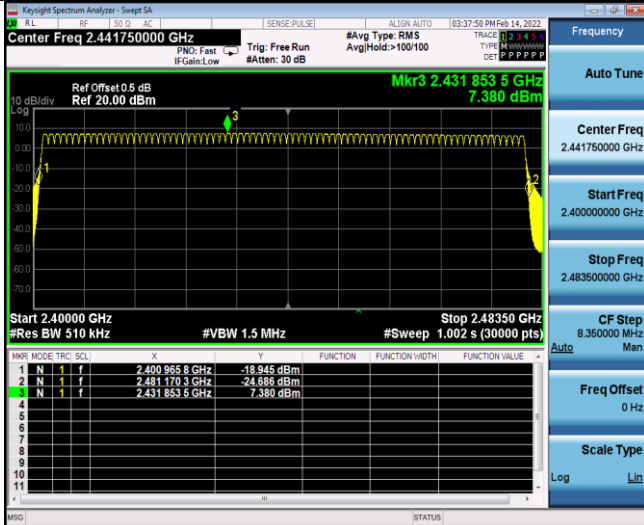

#### $\pi/4$ -DQPSK

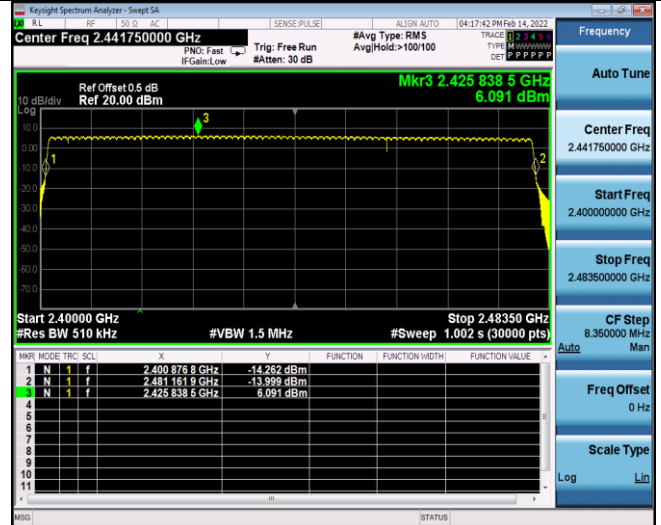

#### 8-DPSK

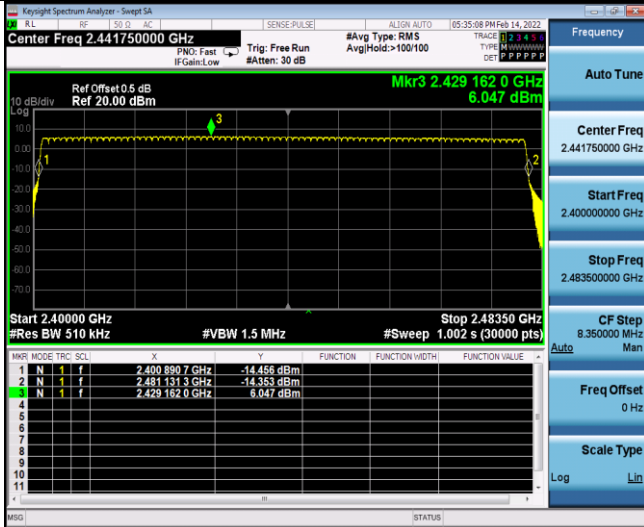


## 5.1. Hopping Frequency Separation

### Limit

#### ETSI EN 300 328 Sub-clause 4.3.1.5.3.2

For adaptive Frequency Hopping equipment, the minimum Hopping Frequency Separation shall be 100 kHz

### Test Configuration

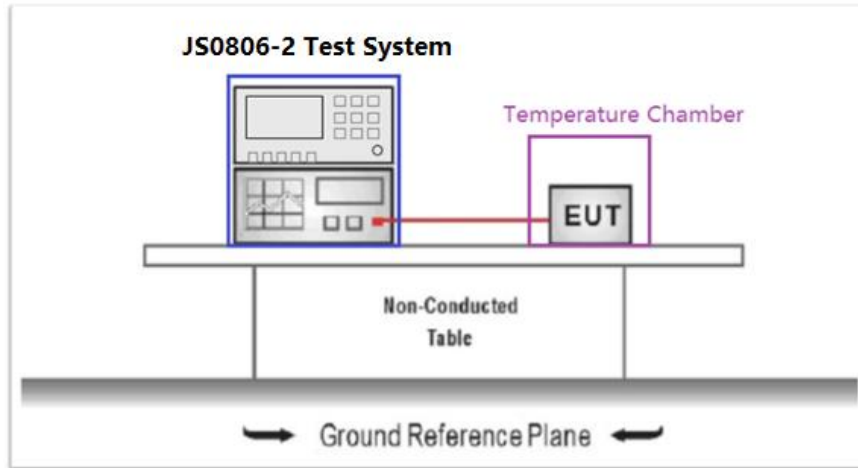

### Test Procedure


Please refer to ETSI EN 300 328 Sub-clause 5.4.4.2.1 for the measurement method.

### Test Result

| Modulation     | Hopping Frequency Separation(MHz) | Limit(MHz) | Result |
|----------------|-----------------------------------|------------|--------|
| GFSK           | 1.006                             | $\geq 0.1$ | Pass   |
| $\pi/4$ -DQPSK | 1.004                             | $\geq 0.1$ | Pass   |
| 8-DPSK         | 1.002                             | $\geq 0.1$ | Pass   |



Test plot as follows:

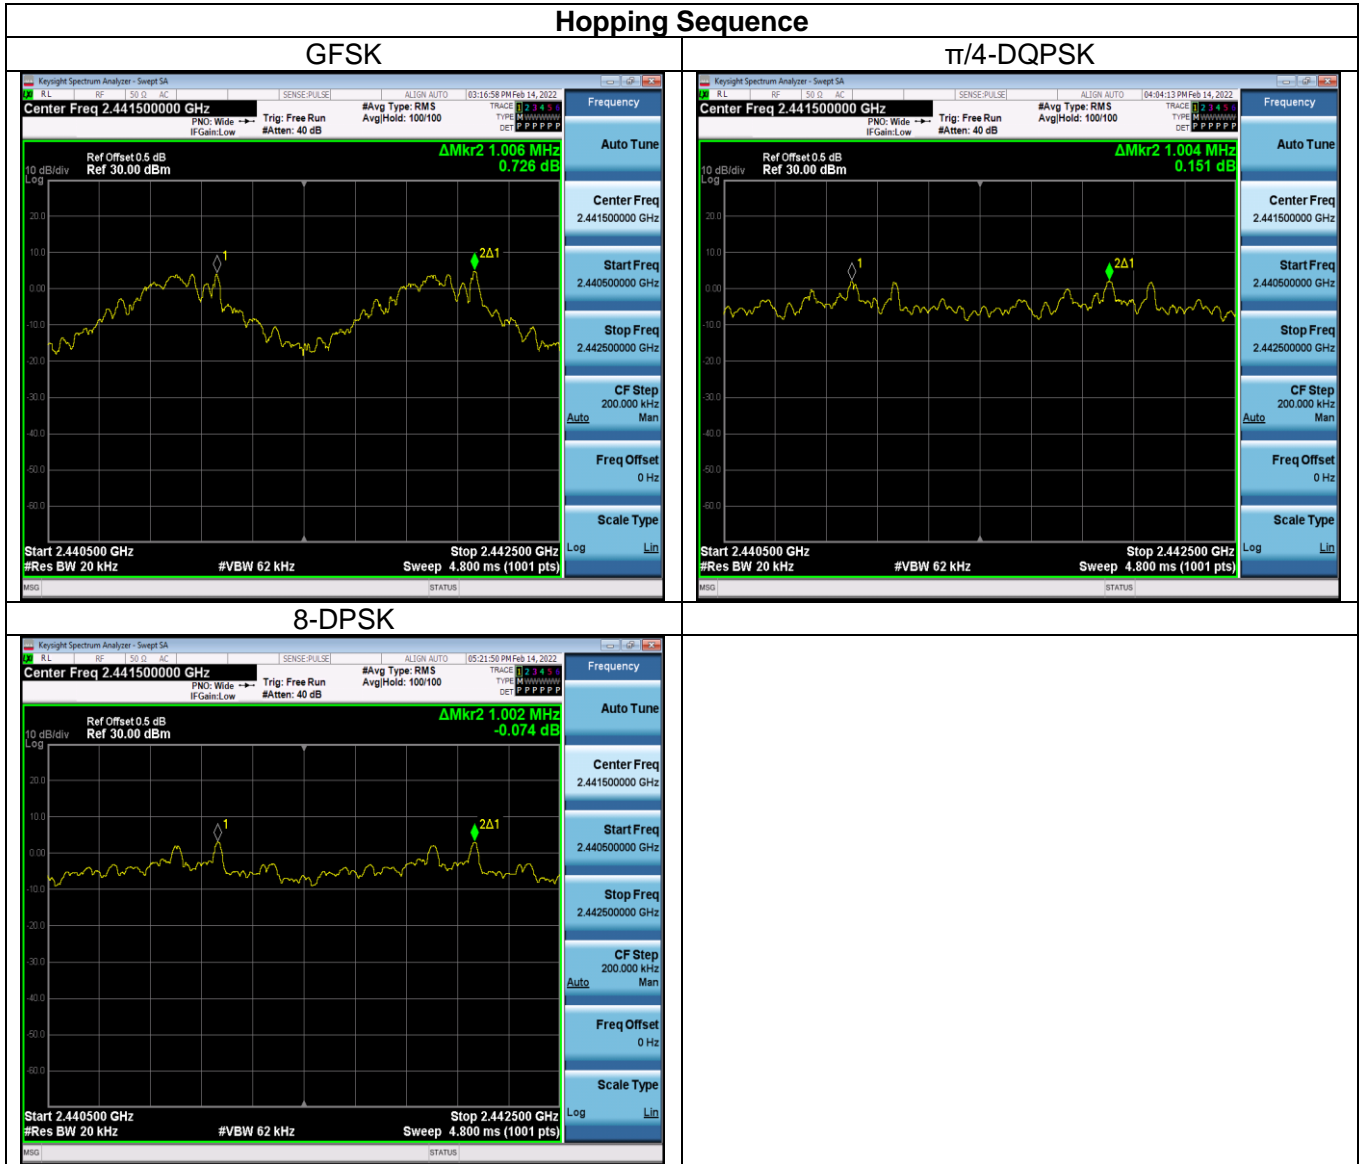

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)


### 3.4. Medium Utilisation (MU) factor

#### Limit

#### ETSI EN 300 328 V2.2.2 Sub-clause 4.3.1.6.3&4.3.2.5.3

The maximum Medium Utilisation factor for non-adaptive equipment shall be 10 %.

#### Test Configuration

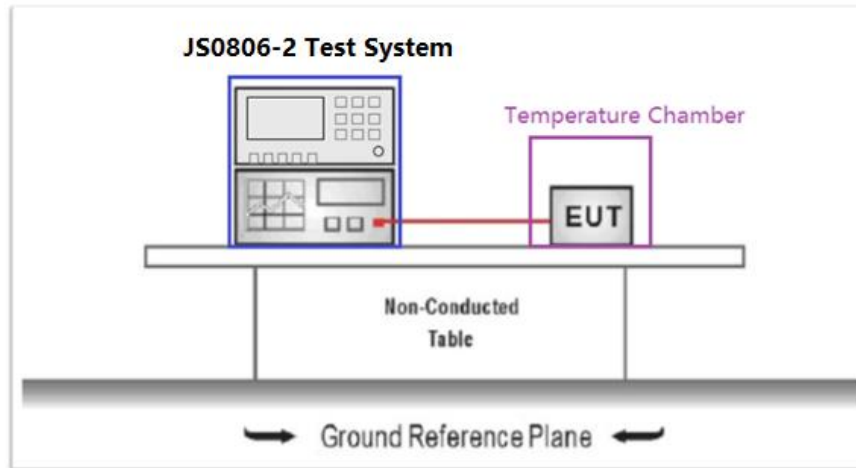

#### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.2.2.1.4 for the measurement method.

#### Test Results

Not applicable to this device which cannot operation in a non-adaptive mode.


### 3.5. Occupied Channel Bandwidth

**Limit**

**ETSI EN 300 328 Sub-clause 4.3.2.7.3**

1. The Occupied Channel Bandwidth shall fall completely within the band given in the band 2,4 GHz to 2,4835 GHz.
2. In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

**Test Configuration**

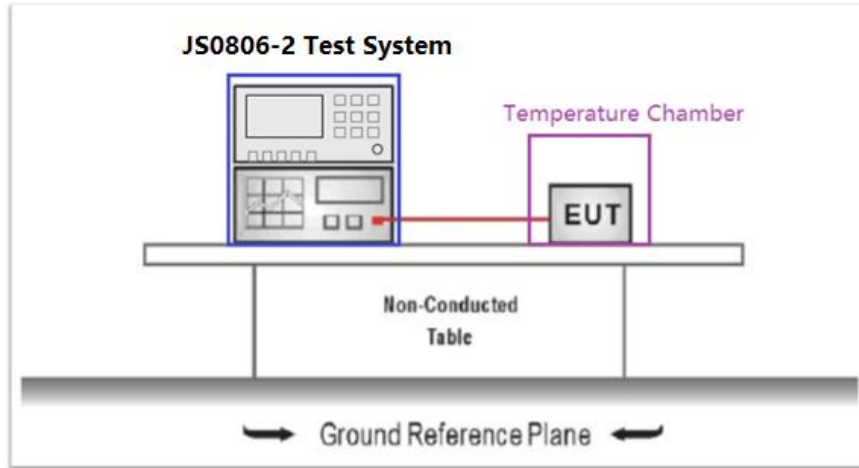

**Test Procedure**

Please refer to ETSI EN 300 328 Sub-clause 5.4.7.2.1 for the measurement method.

**Test Result**

| Modulation | Channel | 99 % Bandwidth (MHz) | Measured Frequency (MHz) |                     | Limit (MHz)     | Result |
|------------|---------|----------------------|--------------------------|---------------------|-----------------|--------|
|            |         |                      | F <sub>lower</sub>       | F <sub>higher</sub> |                 |        |
| GFSK       | CH01    | 0.9073               | 2401.5497                | 2402.4570           | 2400.00~2483.50 | Pass   |
|            | CH78    | 0.9085               | 2479.5568                | 2480.4652           |                 |        |
| π/4-DQPSK  | CH01    | 1.2373               | 2401.3910                | 2402.6283           | 2400.00~2483.50 | Pass   |
|            | CH78    | 1.2492               | 2479.3954                | 2480.6446           |                 |        |
| 8-DPSK     | CH01    | 1.2432               | 2401.3783                | 2402.6215           | 2400.00~2483.50 | Pass   |
|            | CH78    | 1.2509               | 2479.3852                | 2480.6361           |                 |        |







Test plots as follow:

GFSK



CH00



CH78

$\pi/4$ -DQPSK



CH00



CH78

8-DSPSK



CH00



CH78

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)




### 3.6. Transmitter unwanted emissions in the out-of-band domain


#### Limit

#### ETSI EN 300 328 V2.2.2 Sub-clause 4.3.1.9.3&4.3.2.8.3

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1.

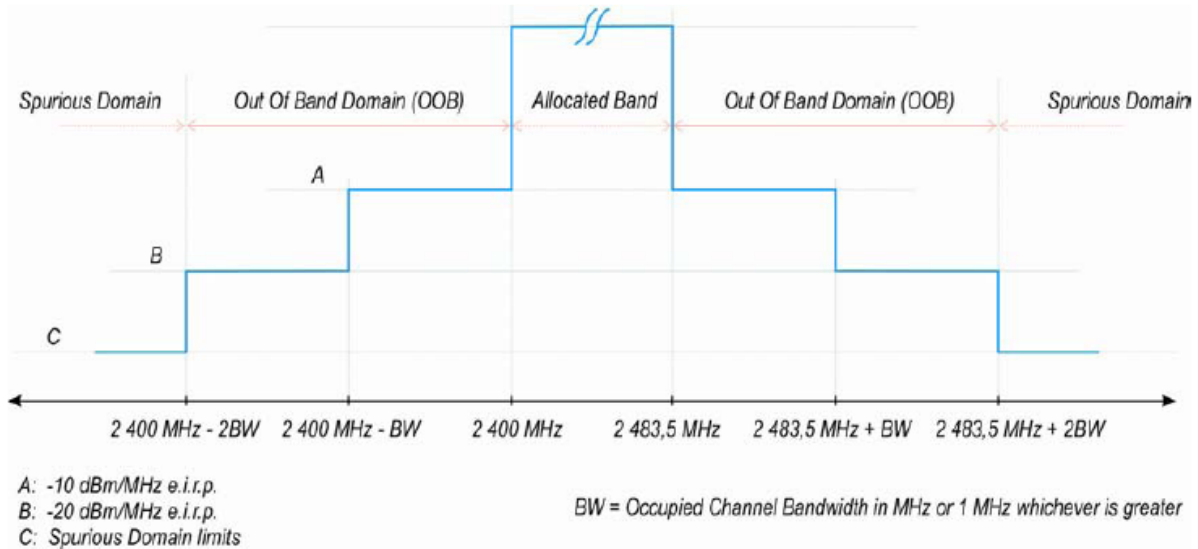

#### Test Configuration

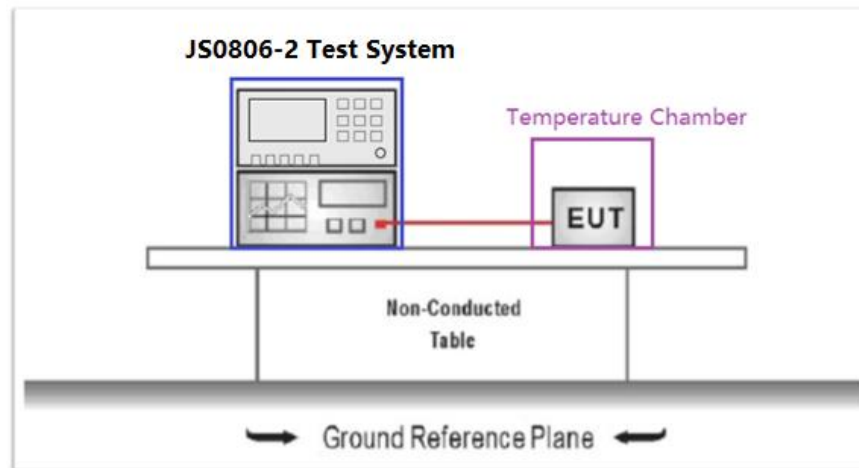

#### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.8.2.1 for the measurement method.




**Test Result**

Remark: The datum recorded below represents the worst emission level in each segment and the plot for normal condition.

| GFSK                  |             |             |             |        |
|-----------------------|-------------|-------------|-------------|--------|
| Frequency range (MHz) |             | Level (dBm) | Limit (dBm) | Result |
| Start                 | Stop        |             |             |        |
| 2400-2OBW             | 2400-OBW    | -63.75      | <-20.00     | Pass   |
| 2400-OBW              | 2400        | -39.35      | <-10.00     | Pass   |
| 2483.5                | 2483.5+OBW  | -37.42      | <-10.00     | Pass   |
| 2483.5+OBW            | 2483.5+2OBW | -49.74      | <-20.00     | Pass   |

Test plot as follows:

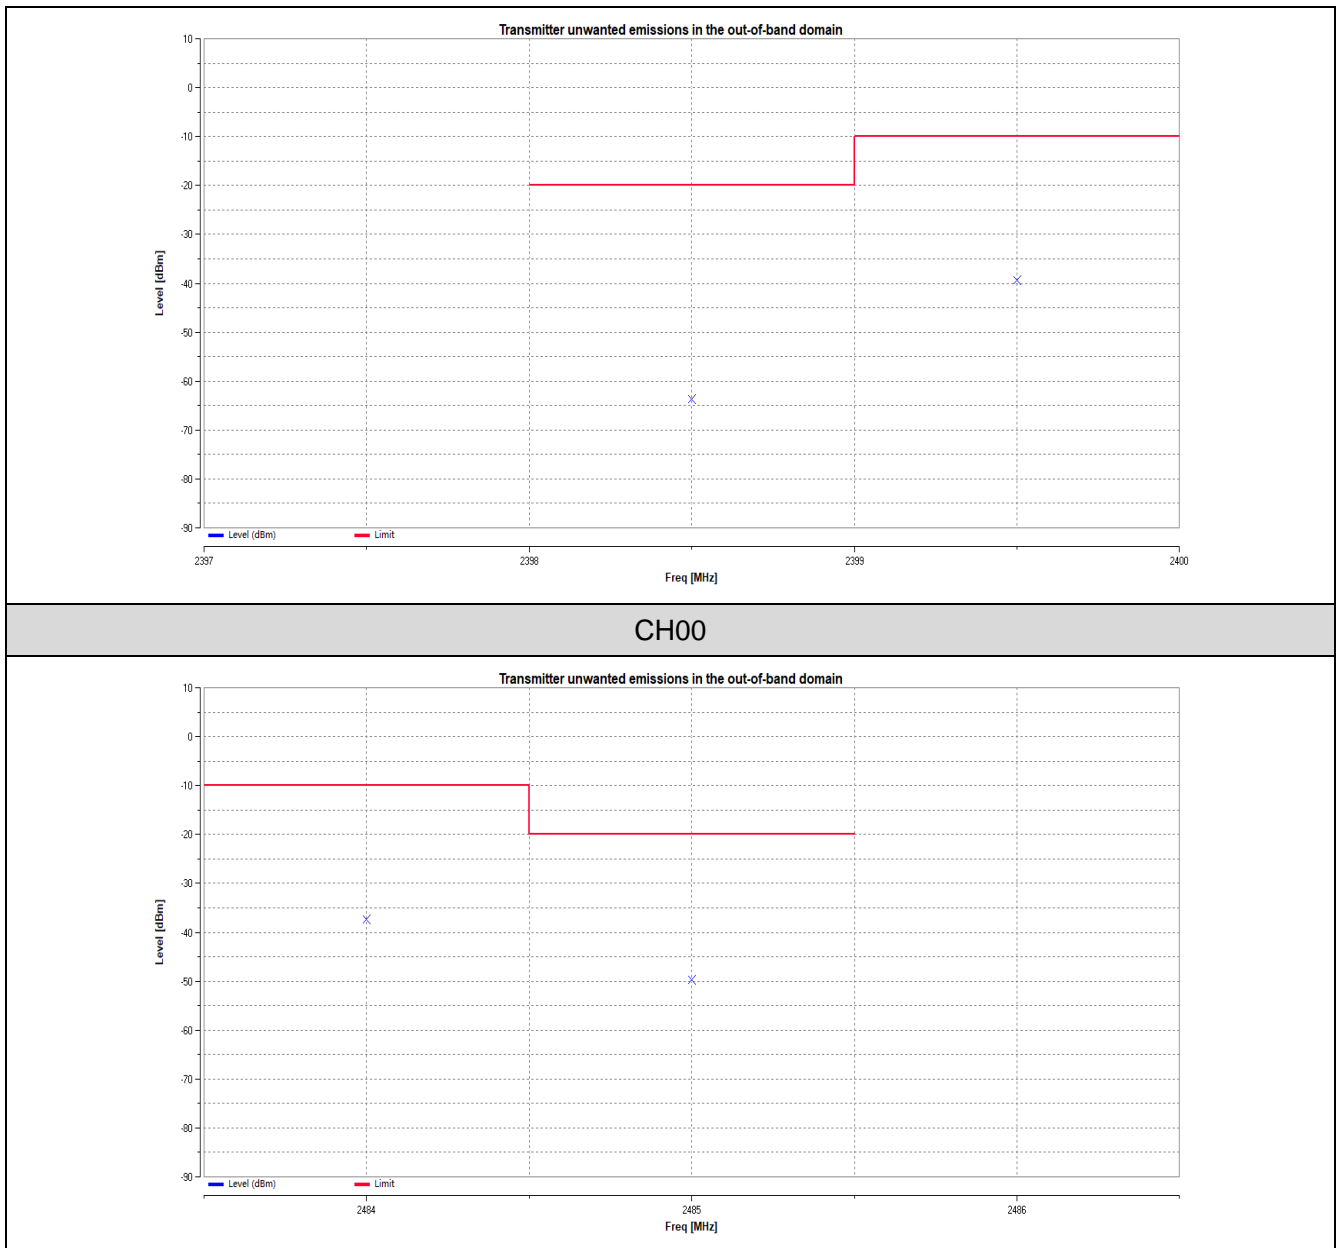

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)



CH78



---

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



TRF No: CTC-TR-051\_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://yz.cnca.cn)



| $\pi/4$ -DQPSK        |             |             |             |        |
|-----------------------|-------------|-------------|-------------|--------|
| Frequency range (MHz) |             | Level (dBm) | Limit (dBm) | Result |
| Start                 | Stop        |             |             |        |
| 2400-2OBW             | 2400-OBW    | -63.35      | <-20.00     | Pass   |
| 2400-OBW              | 2400        | -47.81      | <-10.00     | Pass   |
| 2483.5                | 2483.5+OBW  | -62.16      | <-10.00     | Pass   |
| 2483.5+OBW            | 2483.5+2OBW | -61.44      | <-20.00     | Pass   |



Test plot as follows:

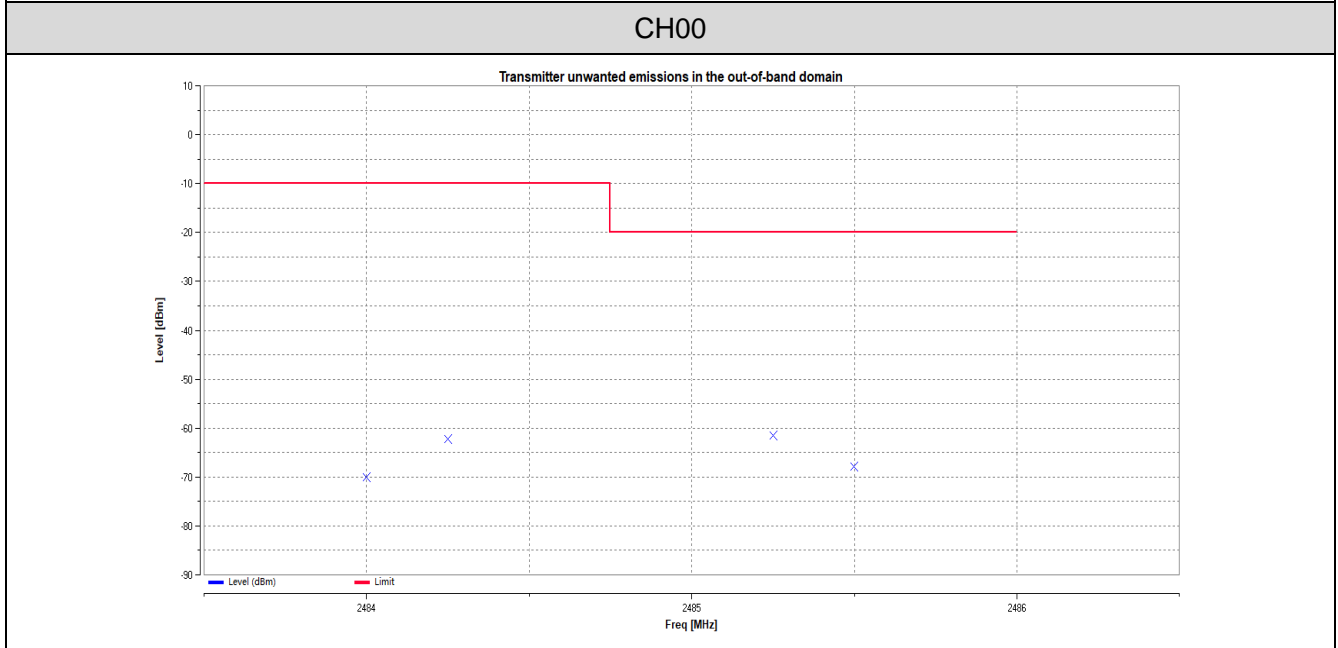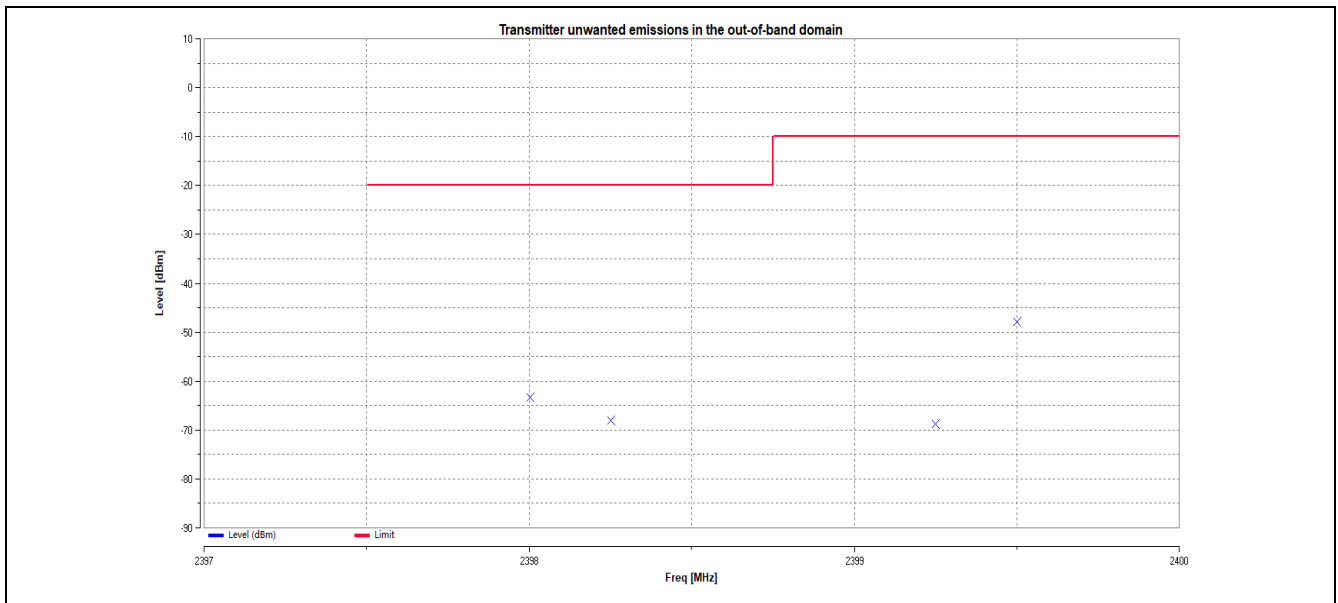



| 8-DPSK                |             |             |             |        |
|-----------------------|-------------|-------------|-------------|--------|
| Frequency range (MHz) |             | Level (dBm) | Limit (dBm) | Result |
| Start                 | Stop        |             |             |        |
| 2400-2OBW             | 2400-OBW    | -54.87      | <-20.00     | Pass   |
| 2400-OBW              | 2400        | -66.60      | <-10.00     | Pass   |
| 2483.5                | 2483.5+OBW  | -67.73      | <-10.00     | Pass   |
| 2483.5+OBW            | 2483.5+2OBW | -67.83      | <-20.00     | Pass   |

Test plot as follows:

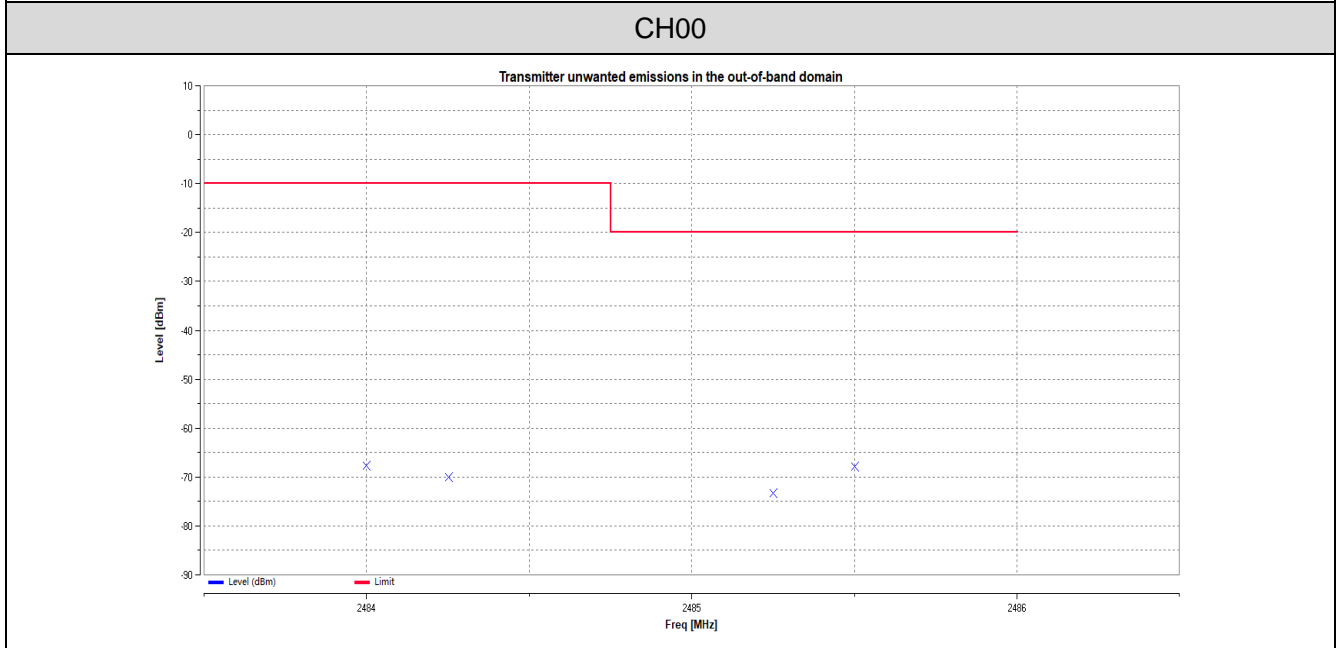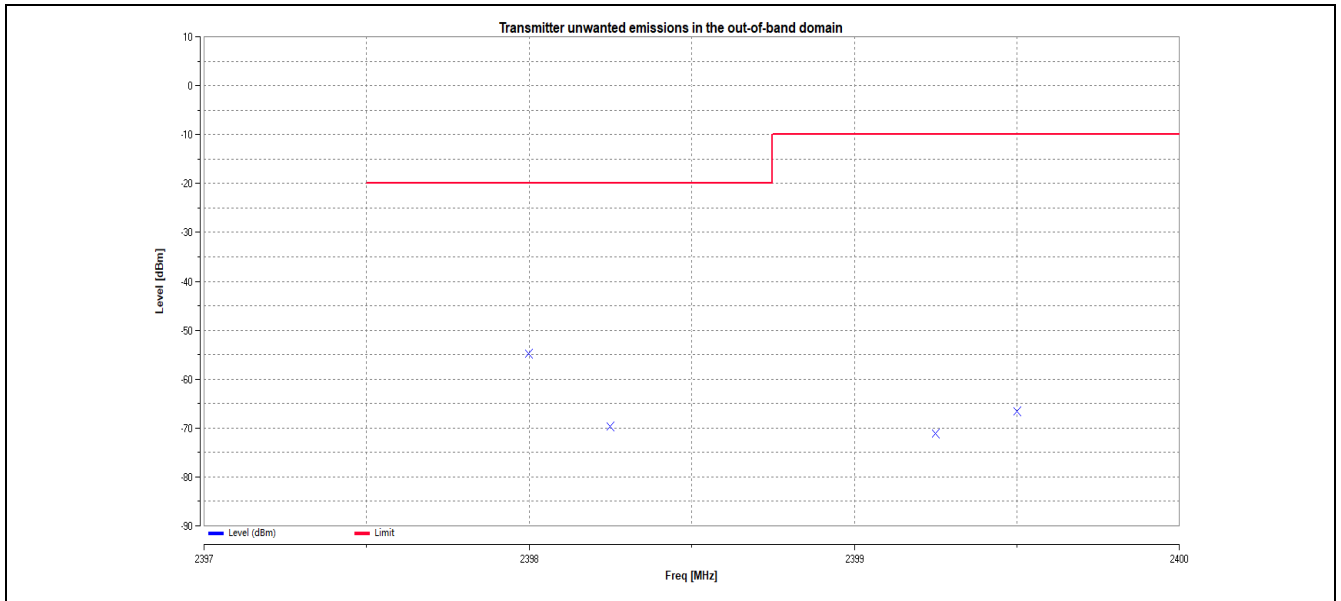

### 3.7. Transmitter unwanted emissions in the spurious domain-Conducted measurements


#### Limit

#### ETSI EN 300 328 Sub-clause 4.3.2.9.3

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in the below table

| Frequency range     | Maximum power | Bandwidth |
|---------------------|---------------|-----------|
| 30 MHz to 47 MHz    | -36 dBm       | 100 kHz   |
| 47 MHz to 74 MHz    | -54 dBm       | 100 kHz   |
| 74 MHz to 87,5 MHz  | -36 dBm       | 100 kHz   |
| 87,5 MHz to 118 MHz | -54 dBm       | 100 kHz   |
| 118 MHz to 174 MHz  | -36 dBm       | 100 kHz   |
| 174 MHz to 230 MHz  | -54 dBm       | 100 kHz   |
| 230 MHz to 470 MHz  | -36 dBm       | 100 kHz   |
| 470 MHz to 694 MHz  | -54 dBm       | 100 kHz   |
| 694 MHz to 1 GHz    | -36 dBm       | 100 kHz   |
| 1 GHz to 12,75 GHz  | -30 dBm       | 1 MHz     |

#### Test Configuration

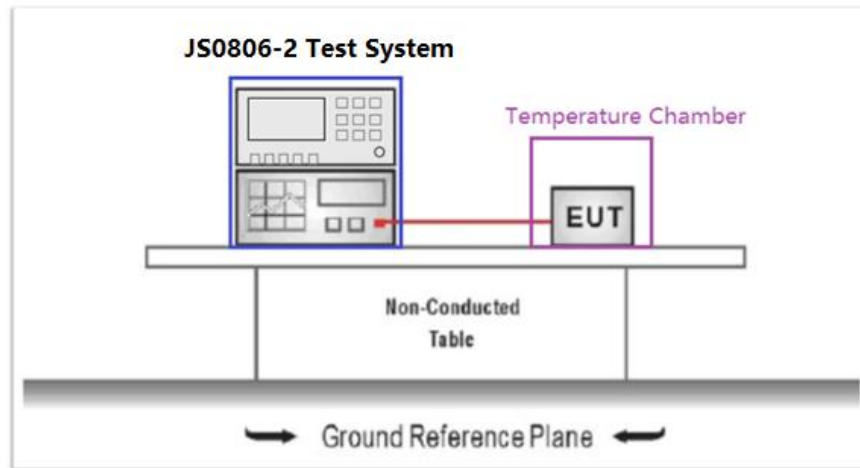


#### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.9.2.1 for the measurement method.

#### Test Result

Note: Pre-scan GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data for worse case.

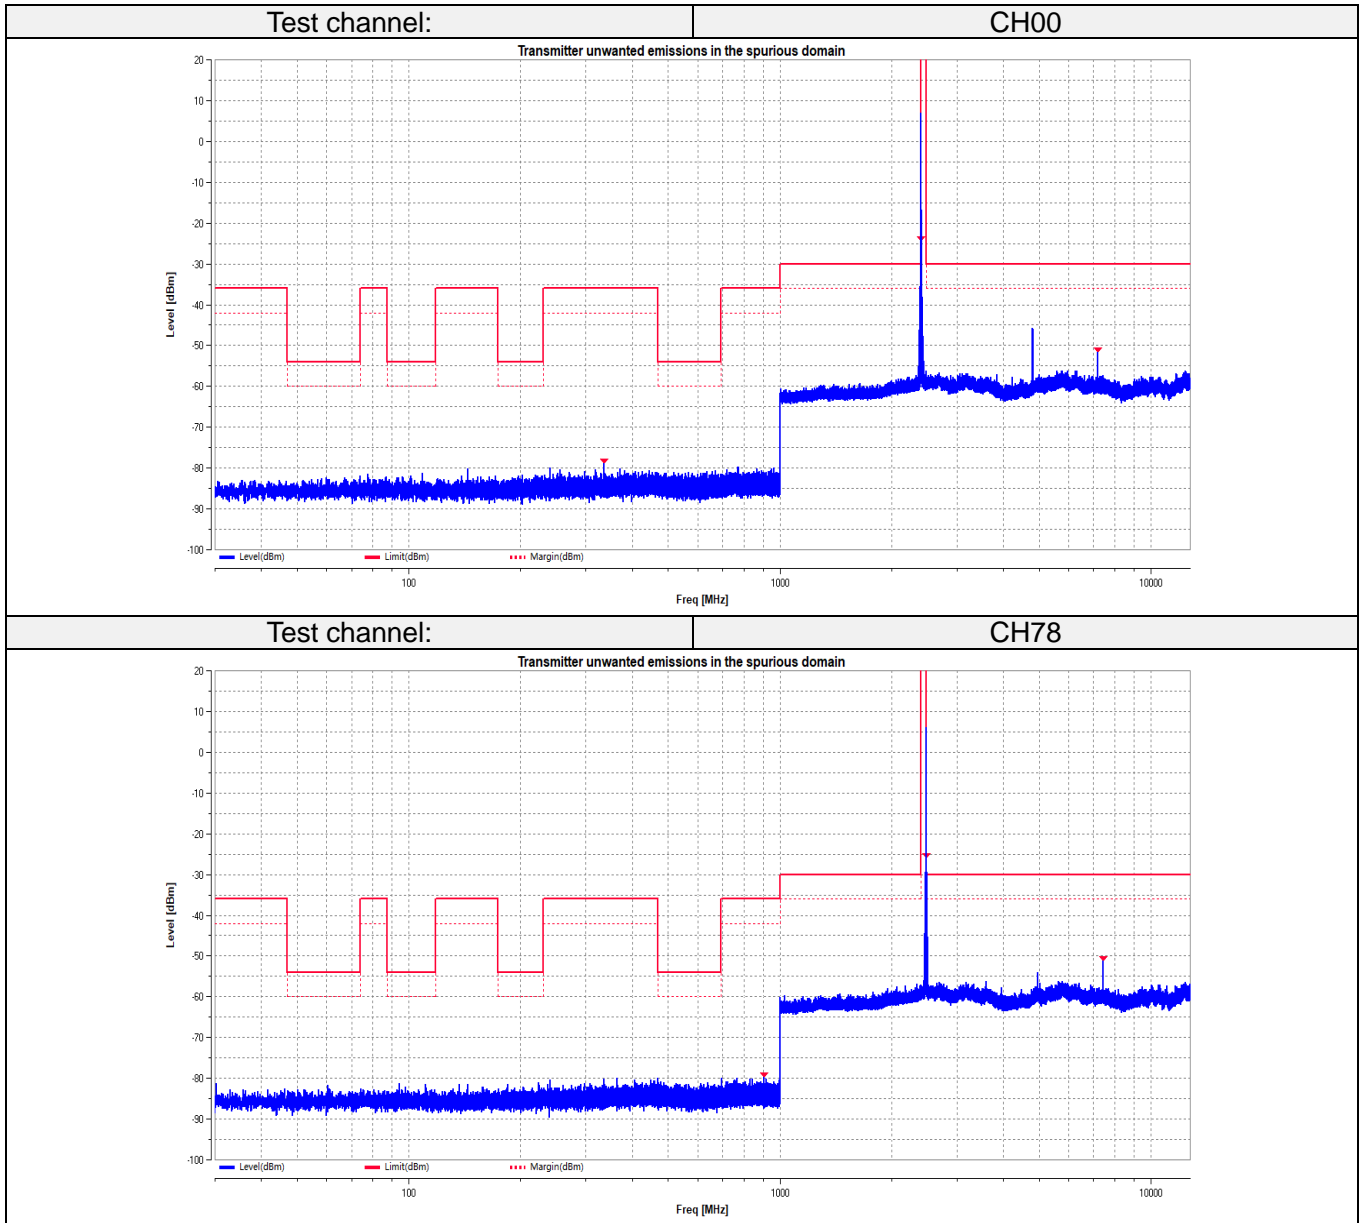

### 3.8. Transmitter unwanted emissions in the spurious domain-Radiated measurements


**Limit**

**ETSI EN 300 328 Sub-clause 4.3.2.9.3**

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in the below table

| Frequency range     | Maximum power | Bandwidth |
|---------------------|---------------|-----------|
| 30 MHz to 47 MHz    | -36 dBm       | 100 kHz   |
| 47 MHz to 74 MHz    | -54 dBm       | 100 kHz   |
| 74 MHz to 87,5 MHz  | -36 dBm       | 100 kHz   |
| 87,5 MHz to 118 MHz | -54 dBm       | 100 kHz   |
| 118 MHz to 174 MHz  | -36 dBm       | 100 kHz   |
| 174 MHz to 230 MHz  | -54 dBm       | 100 kHz   |
| 230 MHz to 470 MHz  | -36 dBm       | 100 kHz   |
| 470 MHz to 694 MHz  | -54 dBm       | 100 kHz   |
| 694 MHz to 1 GHz    | -36 dBm       | 100 kHz   |
| 1 GHz to 12,75 GHz  | -30 dBm       | 1 MHz     |

**Test Configuration**

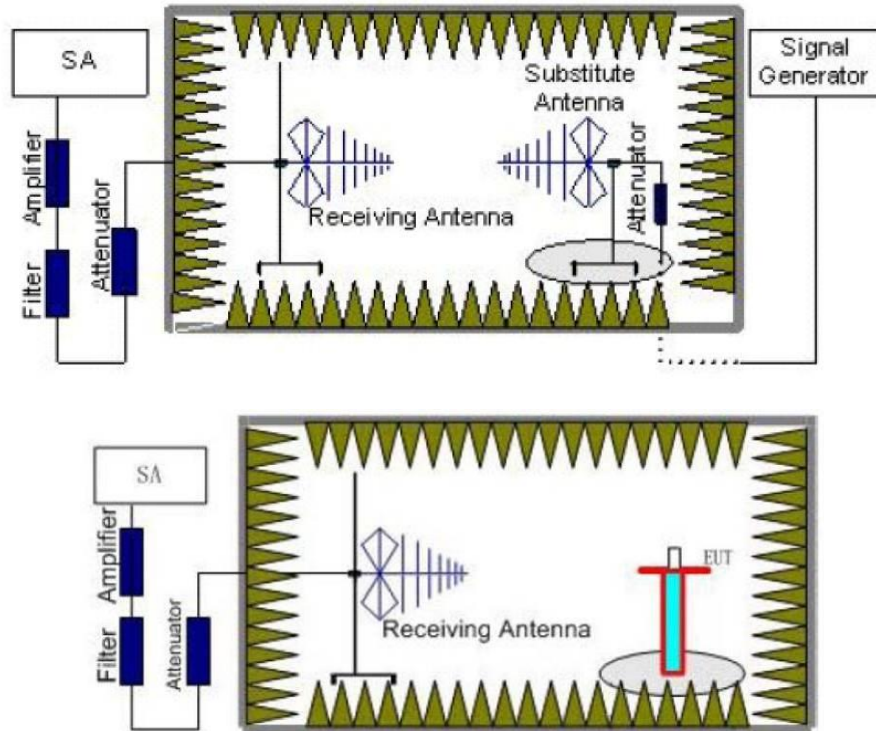

**Test Procedure**

Please refer to ETSI EN 300 328 Sub-clause 5.4.9.2.2 for the measurement method.

**Test Result**


Note:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
2. Pre-scan GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation LCH which it is worse case, so only show the test data for worse case.






(1) Below 1G

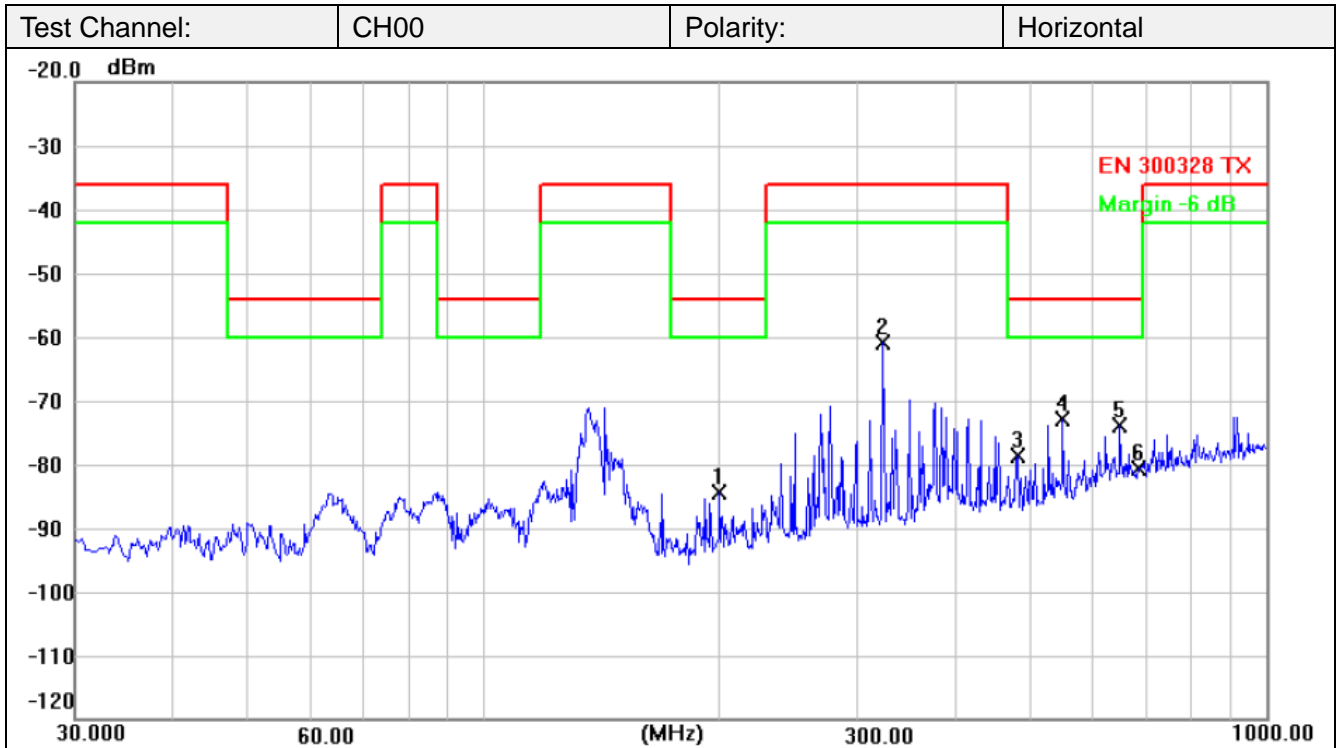

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 200.0733        | -68.30        | -16.07      | -84.37      | -54.00      | -30.37      | peak     |
| 2   | 323.9100        | -47.99        | -12.94      | -60.93      | -36.00      | -24.93      | peak     |
| 3   | 481.0500        | -69.11        | -9.54       | -78.65      | -54.00      | -24.65      | peak     |
| 4 * | 549.9200        | -64.85        | -7.94       | -72.79      | -54.00      | -18.79      | peak     |
| 5   | 650.1533        | -67.76        | -6.11       | -73.87      | -54.00      | -19.87      | peak     |
| 6   | 685.7199        | -74.92        | -5.69       | -80.61      | -54.00      | -26.61      | peak     |

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



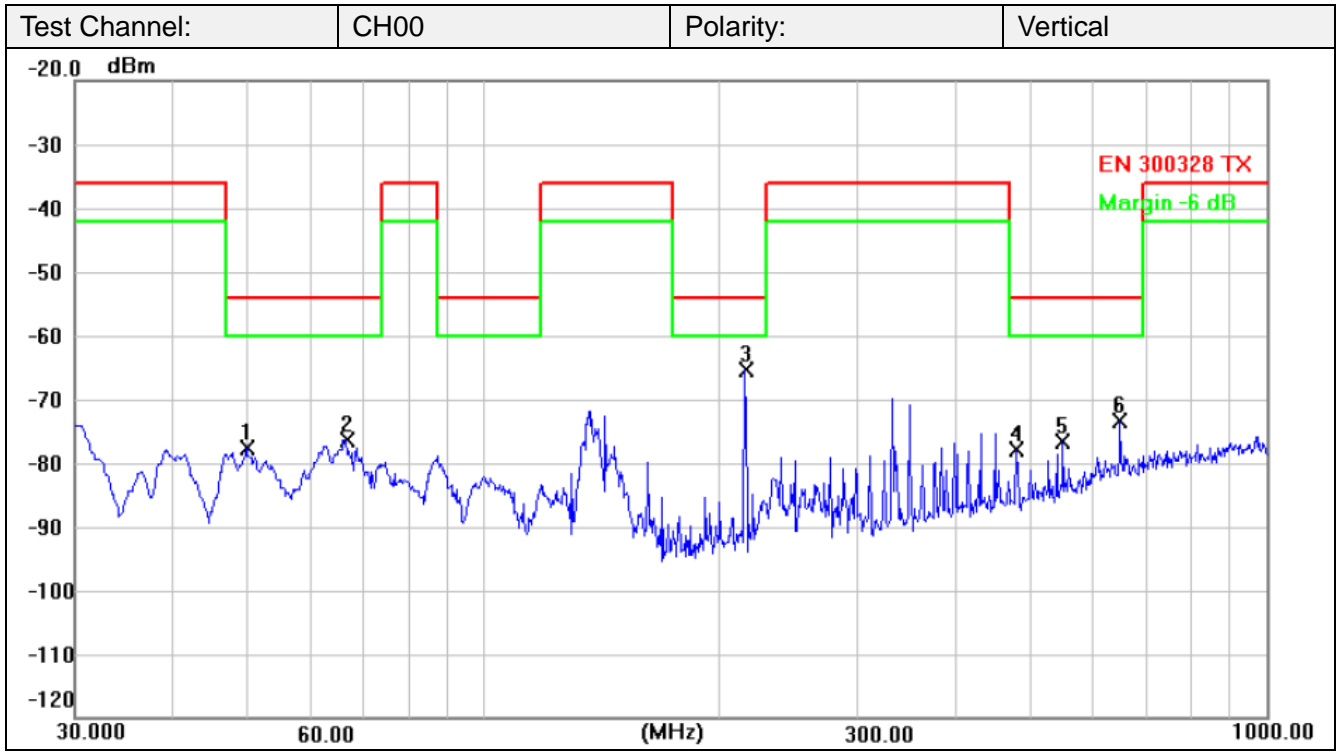


| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 49.7232         | -63.44        | -14.29      | -77.73      | -54.00      | -23.73      | peak     |
| 2   | 66.5367         | -58.75        | -17.59      | -76.34      | -54.00      | -22.34      | peak     |
| 3 * | 215.9167        | -49.69        | -15.62      | -65.31      | -54.00      | -11.31      | peak     |
| 4   | 480.0800        | -68.28        | -9.56       | -77.84      | -54.00      | -23.84      | peak     |
| 5   | 549.9200        | -68.72        | -7.94       | -76.66      | -54.00      | -22.66      | peak     |
| 6   | 649.8300        | -67.35        | -6.11       | -73.46      | -54.00      | -19.46      | peak     |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



(2) Above 1G

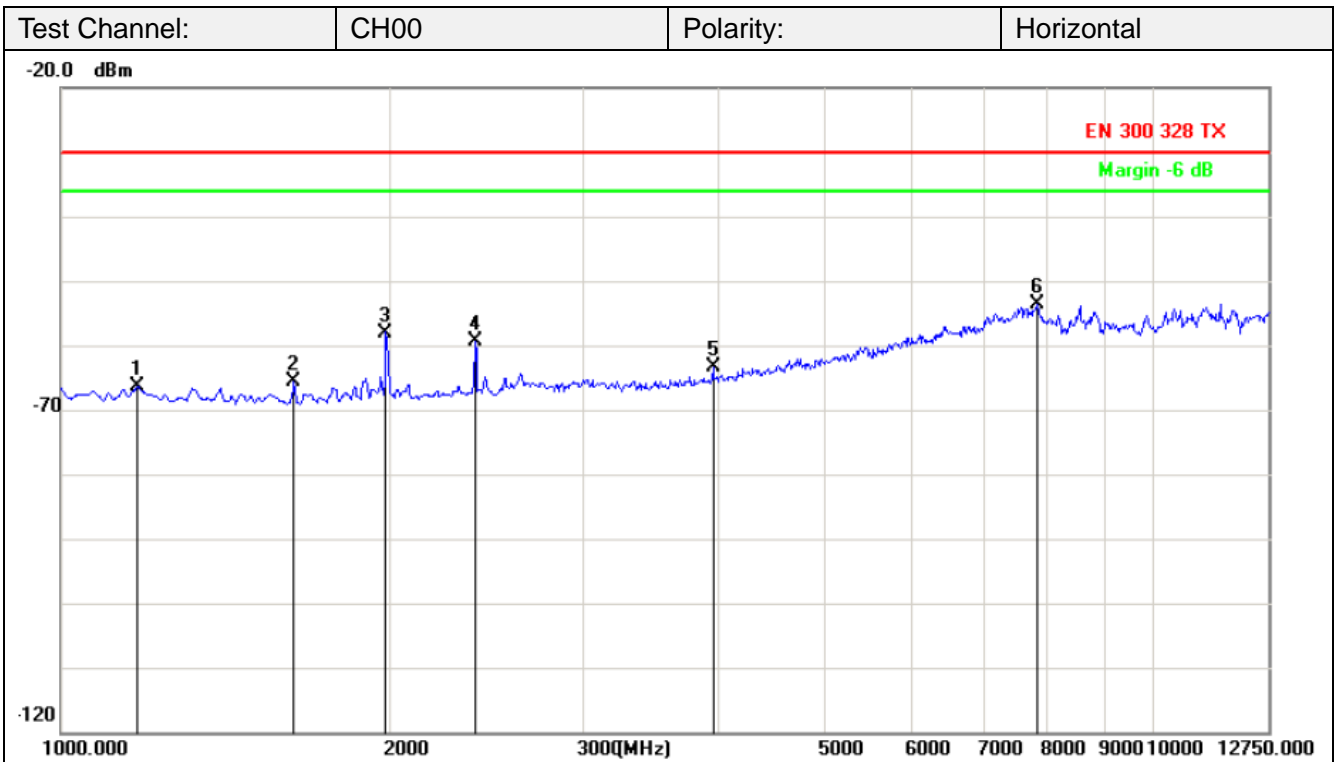


| No. | Frequency (MHz) | Factor (dB) | Reading (dBm) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|-------------|---------------|-------------|-------------|-------------|----------|
| 1   | 1176.250        | -12.15      | -54.23        | -66.38      | -30.00      | -36.38      | peak     |
| 2   | 1634.500        | -11.15      | -54.49        | -65.64      | -30.00      | -35.64      | peak     |
| 3   | 1987.000        | -9.94       | -48.06        | -58.00      | -30.00      | -28.00      | peak     |
| 4   | 2398.250        | -8.06       | -51.37        | -59.43      | -30.00      | -29.43      | peak     |
| 5   | 3961.000        | -5.27       | -58.05        | -63.32      | -30.00      | -33.32      | peak     |
| 6   | 7850.250        | 4.39        | -58.04        | -53.65      | -30.00      | -23.65      | peak     |

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



|               |      |           |          |
|---------------|------|-----------|----------|
| Test Channel: | CH00 | Polarity: | Vertical |
|---------------|------|-----------|----------|

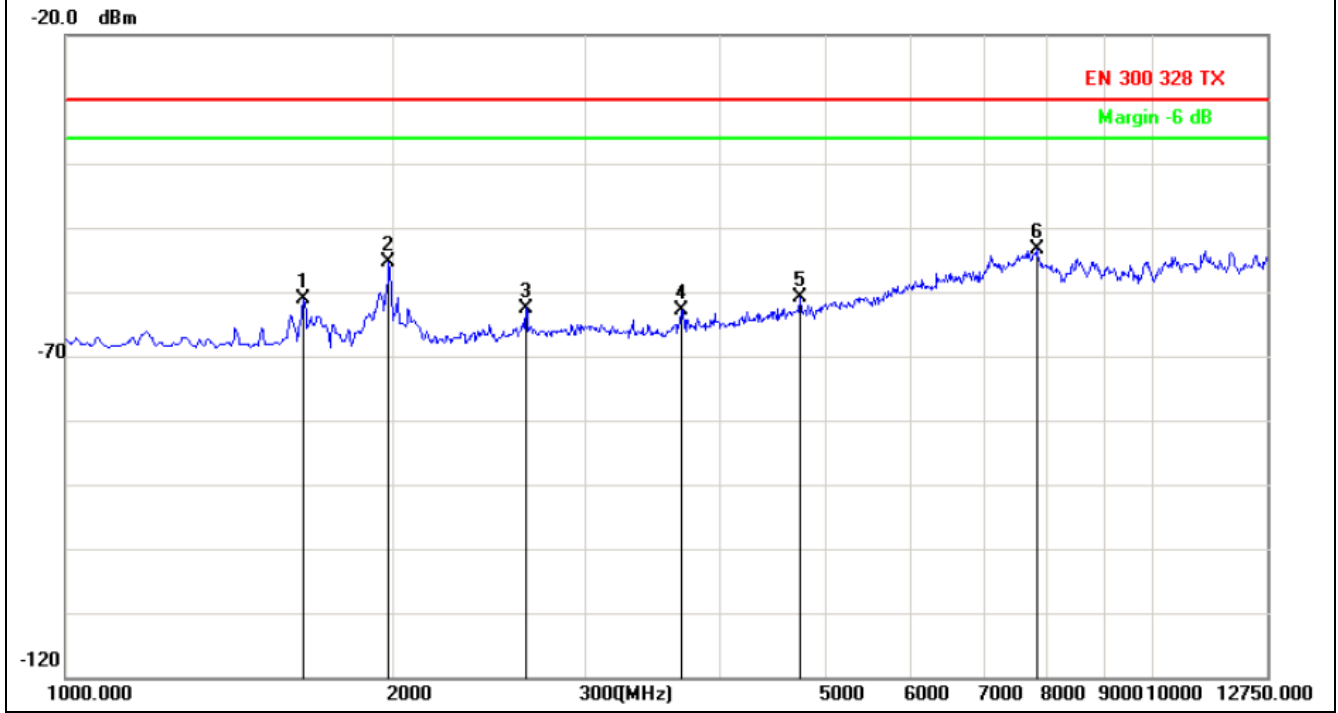

| No. | Frequency (MHz) | Factor (dB) | Reading (dBm) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|-------------|---------------|-------------|-------------|-------------|----------|
| 1   | 1658.000        | -11.12      | -49.96        | -61.08      | -30.00      | -31.08      | peak     |
| 2   | 1987.000        | -9.94       | -45.48        | -55.42      | -30.00      | -25.42      | peak     |
| 3   | 2656.750        | -7.26       | -55.24        | -62.50      | -30.00      | -32.50      | peak     |
| 4   | 3690.750        | -6.00       | -56.81        | -62.81      | -30.00      | -32.81      | peak     |
| 5   | 4748.250        | -2.98       | -57.80        | -60.78      | -30.00      | -30.78      | peak     |
| 6   | 7826.750        | 4.35        | -57.71        | -53.36      | -30.00      | -23.36      | peak     |

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value

### 3.9. Receiver spurious emissions-Conducted measurements


#### Limit

#### ETSI EN 300 328 Sub-clause 4.3.2.10.3

The spurious emissions of the receiver shall not exceed the values given in the below table

| Frequency range    | Maximum power | Measurement bandwidth |
|--------------------|---------------|-----------------------|
| 30 MHz to 1 GHz    | -57 dBm       | 100 kHz               |
| 1 GHz to 12,75 GHz | -47 dBm       | 1 MHz                 |

#### Test Configuration

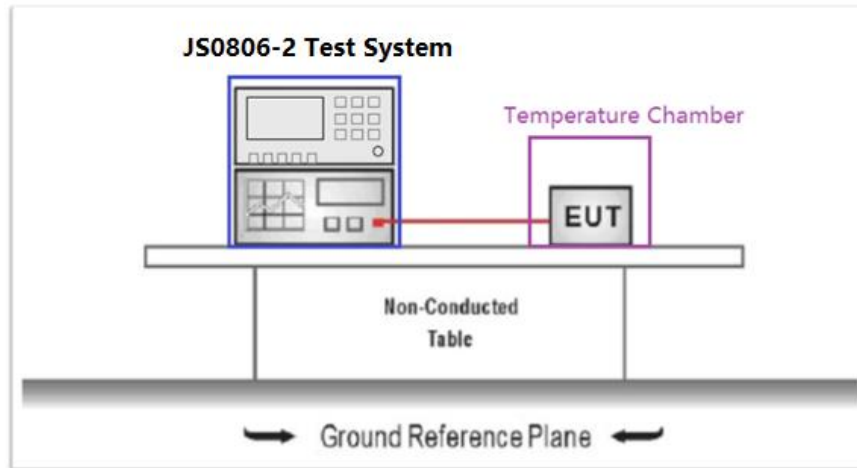


#### Test Procedure

Please refer to ETSI EN 300 328 Sub-clause 5.4.10.2.1 for the measurement method.

#### Test Result

Note: Pre-scan GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case, so only show the test data for worse case.

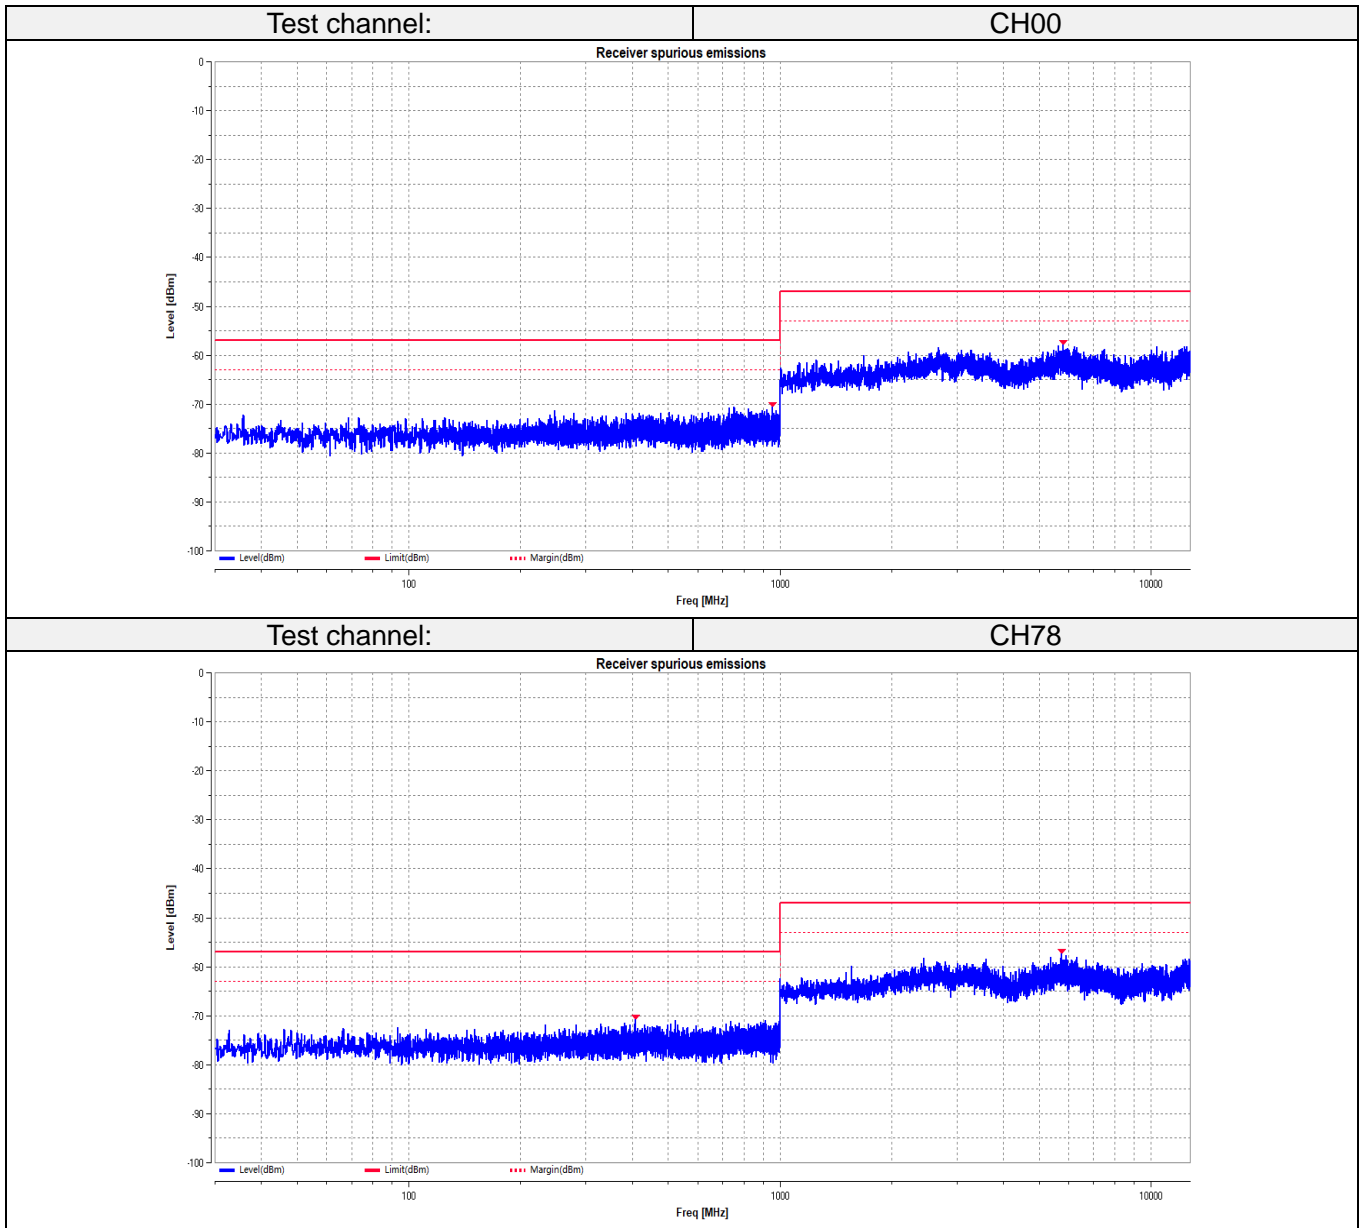

### 3.10. Receiver spurious emissions-Radiated measurements


**Limit**

**ETSI EN 300 328 Sub-clause 4.3.2.10.3**

The spurious emissions of the receiver shall not exceed the values given in the below table

| Frequency range    | Maximum power | Measurement bandwidth |
|--------------------|---------------|-----------------------|
| 30 MHz to 1 GHz    | -57 dBm       | 100 kHz               |
| 1 GHz to 12,75 GHz | -47 dBm       | 1 MHz                 |

**Test Configuration**

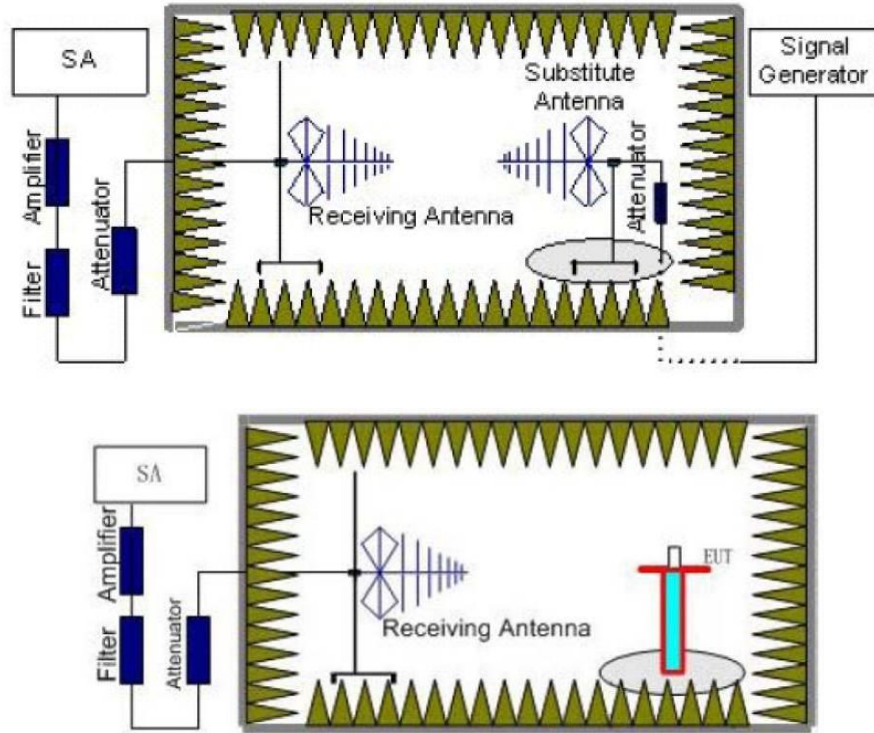

**Test Procedure**

Please refer to ETSI EN 300 328 Sub-clause 5.4.10.2.2 for the measurement method.

**Test Result**

Note:


1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Z axis” position was the worst, and test data recorded in this report.
2. Pre-scan GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation LCH which it is worse case, so only show the test data for worse case.







(1) Below 1G

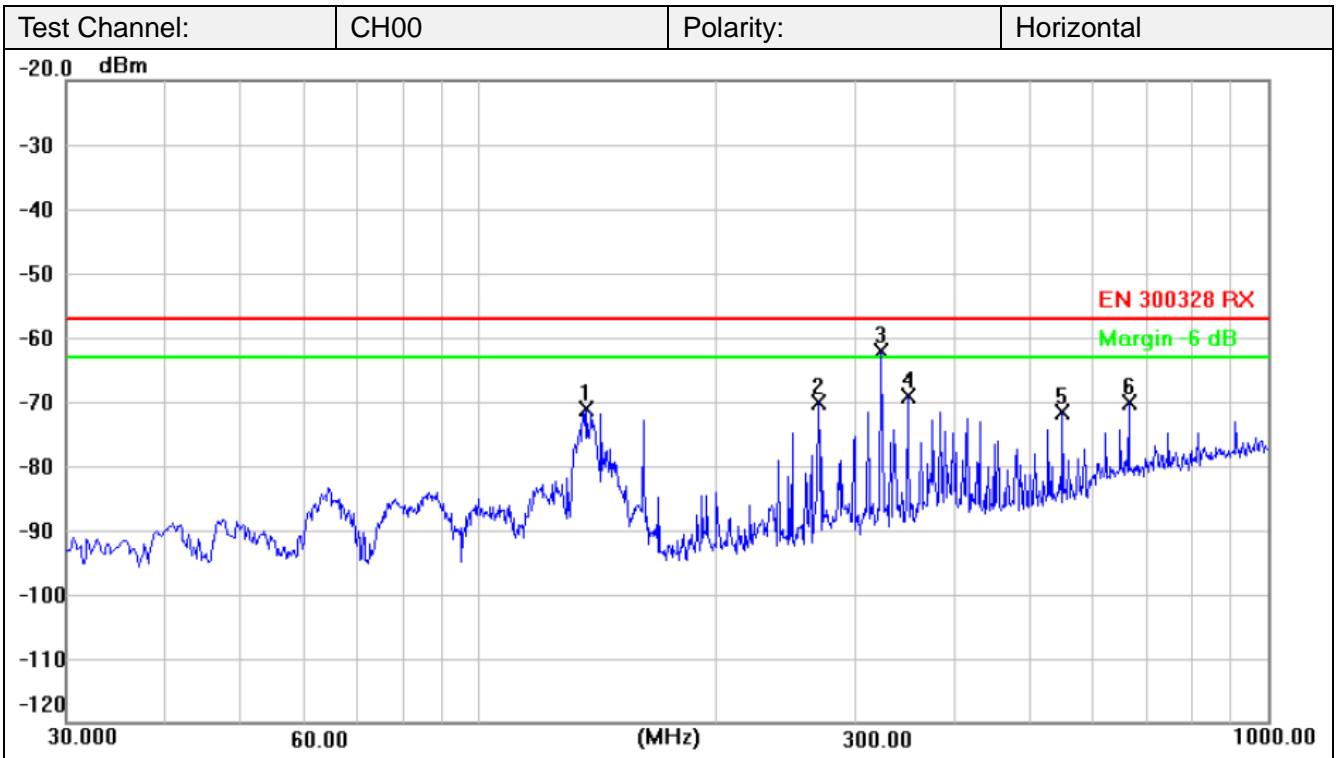


| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 137.3466        | -51.25        | -19.88      | -71.13      | -57.00      | -14.13      | peak     |
| 2   | 269.9133        | -55.88        | -14.20      | -70.08      | -57.00      | -13.08      | peak     |
| 3 * | 323.9100        | -49.13        | -12.94      | -62.07      | -57.00      | -5.07       | peak     |
| 4   | 350.1000        | -56.78        | -12.30      | -69.08      | -57.00      | -12.08      | peak     |
| 5   | 549.9200        | -63.56        | -7.94       | -71.50      | -57.00      | -14.50      | peak     |
| 6   | 666.3200        | -64.30        | -5.92       | -70.22      | -57.00      | -13.22      | peak     |

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





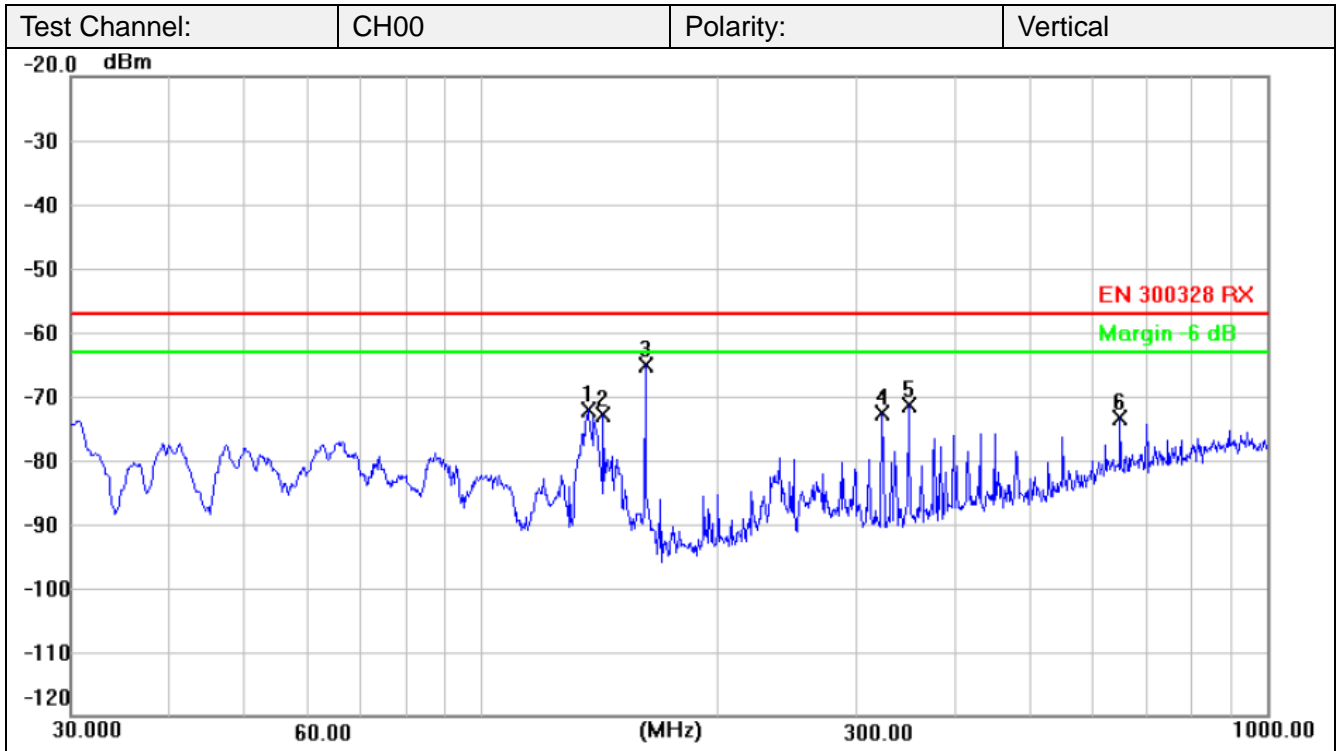


| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|----------|
| 1   | 137.3466        | -52.31        | -19.88      | -72.19      | -57.00      | -15.19      | peak     |
| 2   | 142.8432        | -52.98        | -19.88      | -72.86      | -57.00      | -15.86      | peak     |
| 3 * | 161.9200        | -46.09        | -19.10      | -65.19      | -57.00      | -8.19       | peak     |
| 4   | 323.9100        | -59.56        | -12.94      | -72.50      | -57.00      | -15.50      | peak     |
| 5   | 350.1000        | -58.96        | -12.30      | -71.26      | -57.00      | -14.26      | peak     |
| 6   | 650.1533        | -67.18        | -6.11       | -73.29      | -57.00      | -16.29      | peak     |

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





(2) Above 1G

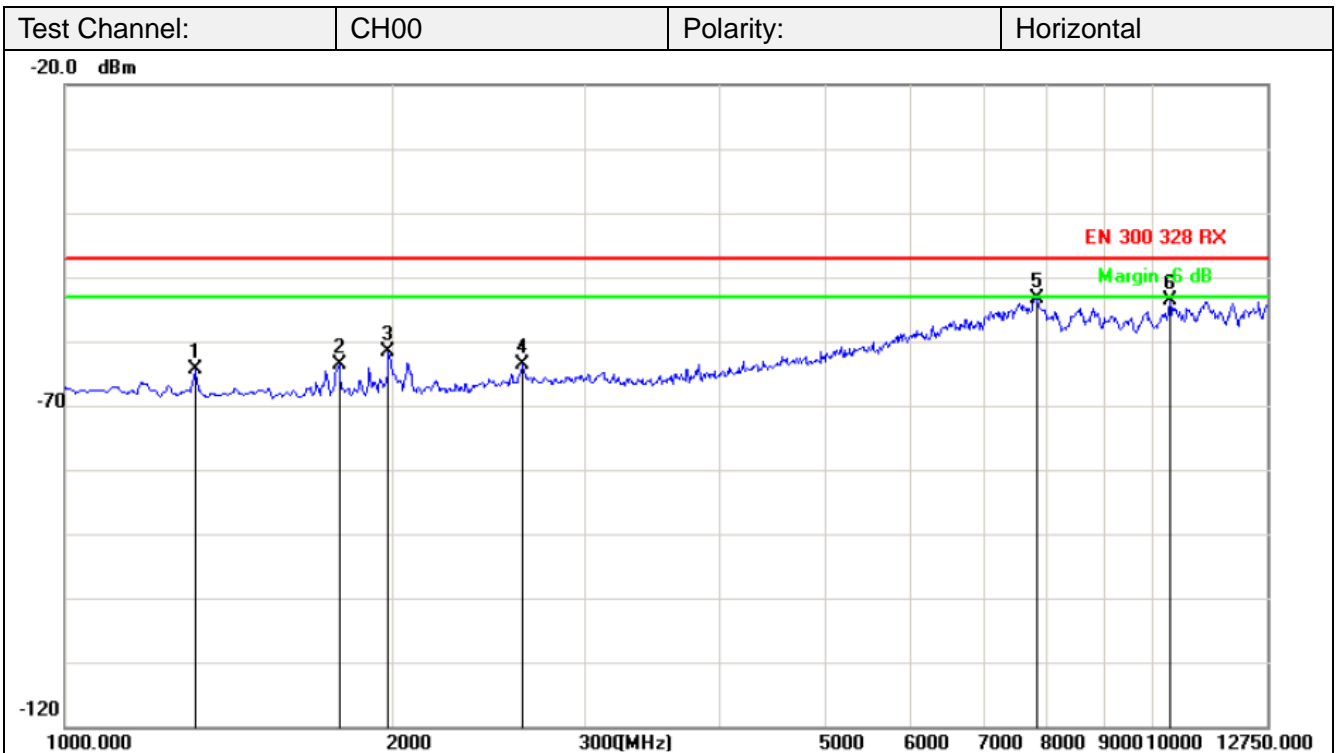

| No. | Frequency (MHz) | Factor (dB) | Reading (dBm) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|-------------|---------------|-------------|-------------|-------------|----------|
| 1   | 1317.250        | -11.58      | -52.84        | -64.42      | -47.00      | -17.42      | peak     |
| 2   | 1787.250        | -10.96      | -52.65        | -63.61      | -47.00      | -16.61      | peak     |
| 3   | 1987.000        | -9.94       | -51.77        | -61.71      | -47.00      | -14.71      | peak     |
| 4   | 2633.250        | -7.31       | -56.38        | -63.69      | -47.00      | -16.69      | peak     |
| 5   | 7826.750        | 4.35        | -57.68        | -53.33      | -47.00      | -6.33       | peak     |
| 6   | 10388.250       | 6.72        | -60.44        | -53.72      | -47.00      | -6.72       | peak     |


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



|               |      |           |          |
|---------------|------|-----------|----------|
| Test Channel: | CH00 | Polarity: | Vertical |
|---------------|------|-----------|----------|

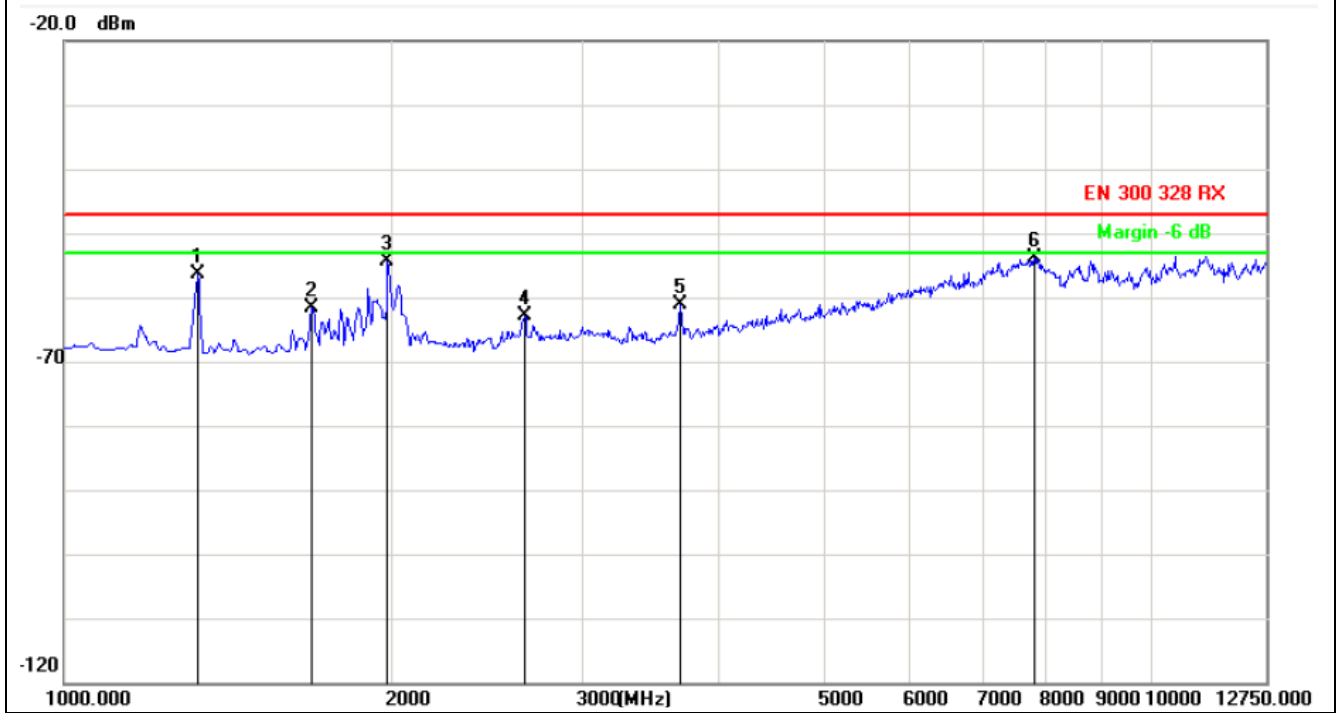

| No. | Frequency (MHz) | Factor (dB) | Reading (dBm) | Level (dBm) | Limit (dBm) | Margin (dB) | Detector |
|-----|-----------------|-------------|---------------|-------------|-------------|-------------|----------|
| 1   | 1329.000        | -11.52      | -44.95        | -56.47      | -47.00      | -9.47       | peak     |
| 2   | 1693.250        | -11.07      | -50.67        | -61.74      | -47.00      | -14.74      | peak     |
| 3   | 1987.000        | -9.94       | -44.46        | -54.40      | -47.00      | -7.40       | peak     |
| 4   | 2656.750        | -7.26       | -55.52        | -62.78      | -47.00      | -15.78      | peak     |
| 5   | 3690.750        | -6.00       | -55.19        | -61.19      | -47.00      | -14.19      | peak     |
| 6   | 7815.000        | 4.32        | -58.12        | -53.80      | -47.00      | -6.80       | peak     |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



### 3.11. Adaptivity

#### Limit

##### ETSI EN 300 328 Sub-clause 4.3.2.6

##### Non-LBT based Detect and Avoid

- 1) During normal operation, the equipment shall evaluate the presence of a signal on its current operating channel. If it is determined that a signal is present with a level above the detection threshold defined in step 5 the channel shall be marked as 'unavailable'.
- 2) The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel.
- 3) The total time during which an equipment has transmissions on a given channel without re-evaluating the availability of that channel, is defined as the Channel Occupancy Time.
- 4) The Channel Occupancy Time shall be less than 40 ms. Each such transmission sequence shall be followed by an Idle Period (no transmissions) of minimum 5 % of the Channel Occupancy Time with a minimum of 100 μs. After this, the procedure as in step 1 needs to be repeated.
- 5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:  $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$  ( $P_{out}$  in mW e.i.r.p.)
- 6) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in below table .

| Wanted signal mean power from companion device (dBm)   | Unwanted signal frequency (MHz)  | Unwanted CW signal power (dBm) |
|--|----------------------------------|--------------------------------|
| -30  | 2 395 or 2 488,5<br>(see note 1) | -35<br>(see note 2)            |
| NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1. |                                  |                                |
| NOTE 2: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.   |                                  |                                |

##### LBT based Detect and Avoid- Frame Based Equipment

- 1) Before transmission, the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The equipment shall observe the operating channel for the duration of the CCA observation time which shall be not less than 18 μs. The channel shall be considered occupied if the energy level in the channel exceeds the threshold given in step 5 below. If the equipment finds the channel to be clear, it may transmit immediately.
- 2) If the equipment finds the channel occupied, it shall not transmit on this channel during the next Fixed Frame Period.  
The equipment is allowed to switch to a non-adaptive mode and to continue transmissions on this channel providing it complies with the requirements applicable to non-adaptive equipment. See clause 4.3.2.6.1. Alternatively, the equipment is also allowed to continue Short Control Signalling Transmissions on this channel providing it complies with the requirements given in clause 4.3.2.6.4.
- 3) The total time during which an equipment has transmissions on a given channel without re-evaluating the availability of that channel, is defined as the Channel Occupancy Time.  
The Channel Occupancy Time shall be in the range 1 ms to 10 ms followed by an Idle Period of at least 5 % of the Channel Occupancy Time used in the equipment for the current Fixed Frame Period.
- 4) An equipment, upon correct reception of a packet which was intended for this equipment can skip CCA and immediately (see also next paragraph) proceed with the transmission of management and control






frames (e.g. ACK and Block ACK frames are allowed but data frames are not allowed). A consecutive sequence of such transmissions by the equipment without a new CCA shall not exceed the maximum Channel Occupancy Time.

5) The energy detection threshold for the CCA shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p. the CCA threshold level may be relaxed to:  $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$  ( $P_{out}$  in mW e.i.r.p.)

6) The equipment shall comply with the requirements defined in step 1 to step 4 in the present clause in the presence of an unwanted CW signal as defined in below table.

| Wanted signal mean power from companion device   | Unwanted signal frequency (MHz) | Unwanted signal power (dBm) |
|--|---------------------------------|-----------------------------|
| sufficient to maintain the link (see note 2)   | 2 395 or 2 488,5 (see note 1)   | -35 (see note 3)            |
| NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1. |                                 |                             |
| NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.  |                                 |                             |
| NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.   |                                 |                             |

An example of the timing for Frame Based Equipment is provided in below figure .

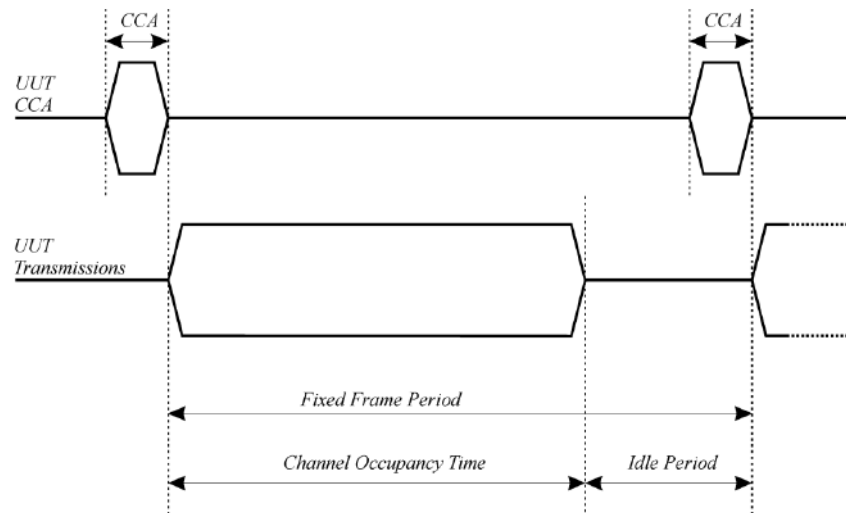

**LBT based Detect and Avoid-Load Based Equipment**

1) Before a transmission or a burst of transmissions, the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The equipment shall observe the operating channel for the duration of the CCA observation time which shall be not less than 18 μs. The channel shall be considered occupied if the energy level in the channel exceeds the threshold given in step 5 below. If the equipment finds the channel to be clear, it may transmit immediately.

2) If the equipment finds the channel occupied, it shall not transmit on this channel (see also the next paragraph). The equipment shall perform an Extended CCA check in which the channel is observed for a random duration in the range between 18 μs and at least 160 μs. If the extended CCA check has determined the channel to be no longer occupied, the equipment may resume transmissions on this channel. If the Extended CCA time has determined the channel still to be occupied, it shall perform new Extended CCA checks until the channel is no longer occupied.

NOTE: The Idle Period in between transmissions is considered to be the CCA or the Extended CCA check as there are no transmissions during this period.





The equipment is allowed to switch to a non-adaptive mode and to continue transmissions on this channel providing it complies with the requirements applicable to non-adaptive equipment. Alternatively, the equipment is also allowed to continue Short Control Signalling Transmissions on this channel providing it complies with the requirements given in clause 4.3.2.6.4.

3) The total time that an equipment makes use of a RF channel is defined as the Channel Occupancy Time. This Channel Occupancy Time shall be less than 13 ms, after which the device shall perform a new CCA as described in step 1 above.

4) The equipment, upon correct reception of a packet which was intended for this equipment can skip CCA and immediately (see also next paragraph) proceed with the transmission of management and control frames (e.g. ACK and Block ACK frames are allowed but data frames are not allowed). A consecutive sequence of transmissions by the equipment without a new CCA shall not exceed the maximum channel occupancy time as defined in step 3 above.

For the purpose of multi-cast, the ACK transmissions (associated with the same data packet) of the individual devices are allowed to take place in a sequence.

5) The equipment, upon correct reception of a packet which was intended for this equipment can skip CCA and immediately (see note 3) proceed with the transmission of management and control frames (e.g. ACK and BlockACK frames are allowed but data frames are not allowed). A consecutive sequence of transmissions by the equipment without a new CCA shall not exceed the maximum channel occupancy time as defined in step 3)above.

6) The energy detection threshold for the CCA shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the CCA threshold level may be relaxed to: TL = -70 dBm/MHz + 10 × log10 (100 mW / Pout) (Pout in mWe.i.r.p.)

7) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in below table.

| Wanted signal mean power from companion device   | Unwanted signal frequency (MHz) | Unwanted signal power (dBm) |
|--|---------------------------------|-----------------------------|
| sufficient to maintain the link (see note 2)   | 2 395 or 2 488,5 (see note 1)   | -35 (see note 3)            |
| NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1. |                                 |                             |
| NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.  |                                 |                             |
| NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.   |                                 |                             |


**Short Control Signalling Transmissions**

If implemented, Short Control Signalling Transmissions of adaptive equipment using wide band modulations other than FHSS shall have a maximum TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms.






**Test Configuration**

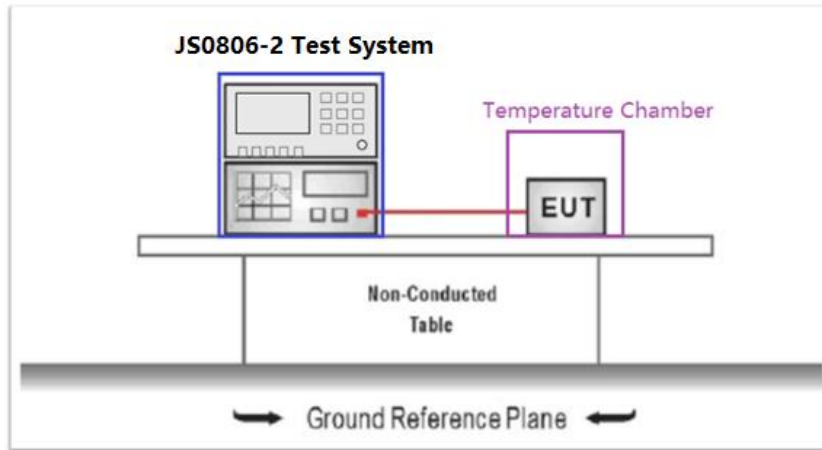

**Test Procedure**

Please refer to ETSI EN 300 328 Sub-clause 5.4.6.2.1 for the measurement method.

**Adaptivity Test schematic graphic**

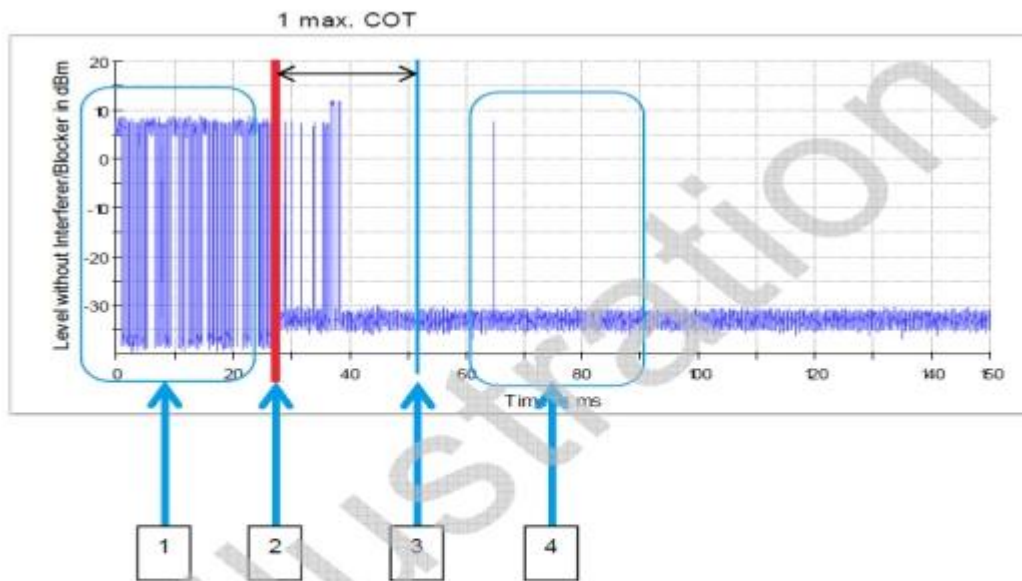

1. Reference measurement (interferer off / Blocker off trace)
2. Interferer switched on (rise of the noise floor)
3. Arming of the video trigger one max. COT after interferer is switched on
4. Monitoring measurement triggered by the short signaling (interferer on / Blocker off trace or interferer on / Blocker on trace)

**Test Results**

Not applicable.

This requirement does not apply to adaptive equipment which maximum RF Output power level is



less than 10 dBm e.i.r.p.







### 3.12. Receiver Blocking

#### Limit

##### ETSI EN 300 328 Sub-clause 4.3.2.11

Performance Criteria: For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

Receiver Category 1: Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receivercategory 1 equipment.

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 4)  | Blocking signal frequency (MHz)                    | Blocking signal power (dBm)<br>(see note 4) | Type of blocking signal |
|--|--|---|-------------------------|
| $(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$<br>or -68 dBm whichever is less<br>(see note 2)  | 2 380<br>2 504                                     | -34   | CW                      |
| $(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$<br>or -74 dBm whichever is less<br>(see note 3)  | 2 300<br>2 330<br>2 360<br>2 524<br>2 584<br>2 674 |   |                         |
| NOTE 1: OCBW is in Hz.<br>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.<br>NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.<br>NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2. |  |   |                         |


Receiver Category 2: Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 3)  | Blocking signal frequency (MHz)  | Blocking signal power (dBm)<br>(see note 3) | Type of blocking signal |
|--|----------------------------------|---|-------------------------|
| $(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$<br>or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less<br>(see note 2)  | 2 380<br>2 504<br>2 300<br>2 584 | -34   | CW                      |
| NOTE 1: OCBW is in Hz.<br>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.<br>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2. |                                  |   |                         |

Receiver Category 3: Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.

| Wanted signal mean power from companion device (dBm)<br>(see notes 1 and 3)  | Blocking signal frequency (MHz)  | Blocking signal power (dBm)<br>(see note 3) | Type of blocking signal |
|--|----------------------------------|---|-------------------------|
| (-139 dBm + 10 × log <sub>10</sub> (OCBW) + 20 dB)<br>or (-74 dBm + 20 dB) whichever is less<br>(see note 2)   | 2 380<br>2 504<br>2 300<br>2 584 | -34   | CW                      |
| NOTE 1: OCBW is in Hz.<br>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 30 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.<br>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2. |                                  |   |                         |

**Test Configuration**

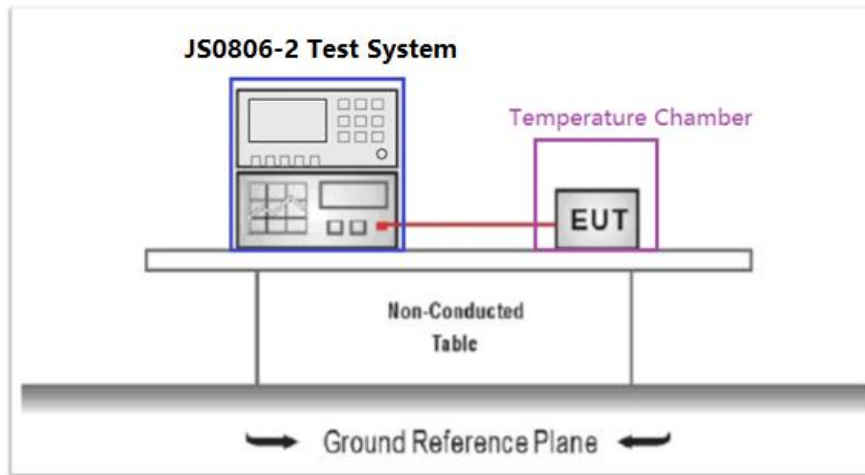

**Test Procedure**

Please refer to ETSI EN 300 328 Sub-clause 5.4.11.2.1 for the measurement method.

**Test Results**



| Operating Channel | Wanted signal power (dBm)  | Blocking signal Frequency (MHz) | Blocking signal power (dBm) | Test PER (%) | Limit (%) | Result |
|-------------------|--|---------------------------------|-----------------------------|--------------|-----------|--------|
| Lowest            | $-139 \text{ dBm} + 10 \times \log_{10}^{(\text{OCBW})} + 10\text{dB}$ | 2300                            | -34                         | 3.5          | <10.00    | Pass   |
|                   |  | 2380                            |                             | 3.6          |           |        |
|                   |  | 2504                            |                             | 2.9          |           |        |
|                   |  | 2584                            |                             | 3.1          |           |        |
| Highest           | $-139 \text{ dBm} + 10 \times \log_{10}^{(\text{OCBW})} + 10\text{dB}$ | 2300                            | -34                         | 3.3          | <10.00    | Pass   |
|                   |  | 2380                            |                             | 4.1          |           |        |
|                   |  | 2504                            |                             | 3.9          |           |        |
|                   |  | 2584                            |                             | 3.6          |           |        |

Note:

1. According to ETSI EN 300328 clause 5.4.11.1. Only the lowest data rate(GFSK) mode was tested and recorded.
2. The equipment belong to Receiver Category 2.




## 4. EUT TEST PHOTOS

Radiated Measurements



Below 1GHz

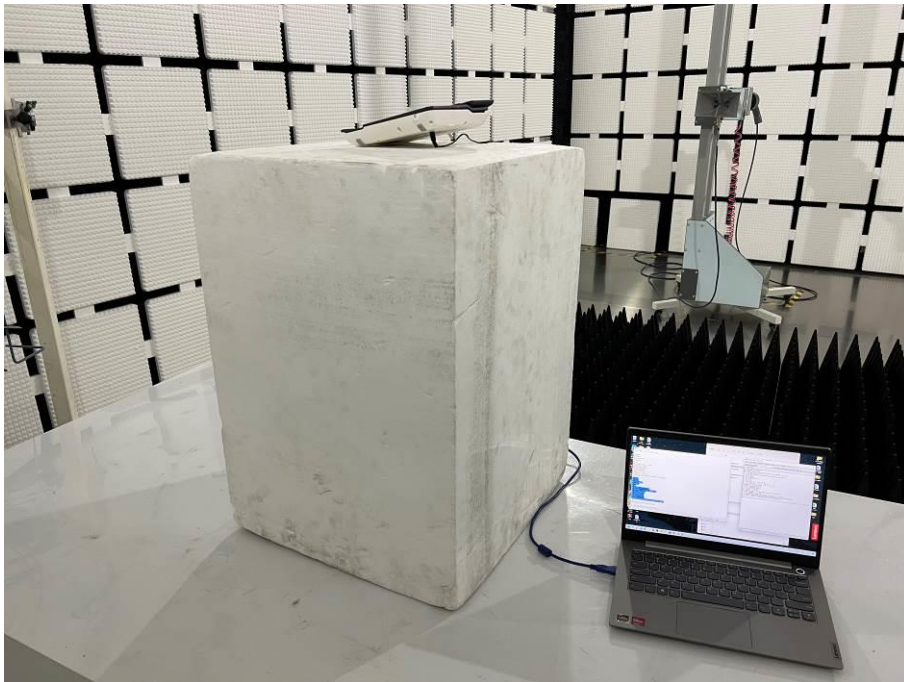

Above 1GHz

\*\*\*\*\*THE END\*\*\*\*\*