




中国认可  
国际互认  
检测  
TESTING  
CNAS L3163

# CE EMC Test Report

**Project No.** : 2403G103  
**Equipment** : Smart Video Phone  
**Brand Name** : XONTEL  
**Test Model** : XT-50G  
**Series Model** : N/A  
**Applicant** : XonTel Technology Trd. Co. W.L.L  
**Address** : Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait  
**Manufacturer** : XonTel Technology Trd. Co. W.L.L  
**Address** : Office 21 - Justice Tower - Ali Al Salem St. - Qibla - Kuwait City - State Of Kuwait  
**Date of Receipt** : Aug. 13, 2021  
**Date of Test** : Aug. 16, 2021 ~ Dec. 04, 2021  
**Issued Date** : May 06, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG20210816160  
**Standard(s)** : EN 55032:2015+A11:2020  
EN IEC 61000-3-2:2019  
EN 61000-3-3:2013+A1:2019  
EN 55035:2017+A11:2020

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.(Dongguan).

**Prepared by** :   
Gerry Zhao

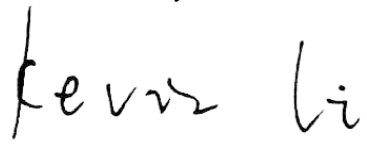**Approved by** :   
Kevin Li

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl\_qa@newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by CNAS.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	10
<b>2 . GENERAL INFORMATION</b>	<b>11</b>
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 DESCRIPTION OF TEST MODES	12
2.3 EUT OPERATING CONDITIONS	14
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.5 DESCRIPTION OF SUPPORT UNITS	15
<b>3 . EMC EMISSION TEST</b>	<b>16</b>
3.1 RADIATED EMISSIONS UP TO 1 GHZ	16
3.1.1 LIMITS	16
3.1.2 MEASUREMENT INSTRUMENTS LIST	16
3.1.3 TEST PROCEDURE	17
3.1.4 DEVIATION FROM TEST STANDARD	17
3.1.5 TEST SETUP	17
3.1.6 MEASUREMENT DISTANCE	18
3.1.7 TEST RESULTS	19
3.2 RADIATED EMISSIONS ABOVE 1 GHZ	25
3.2.1 LIMITS	25
3.2.2 MEASUREMENT INSTRUMENTS LIST	25
3.2.3 TEST PROCEDURE	26
3.2.4 DEVIATION FROM TEST STANDARD	26
3.2.5 TEST SETUP	26
3.2.6 MEASUREMENT DISTANCE	27
3.2.7 TEST RESULTS	28
3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	34
3.3.1 LIMITS	34
3.3.2 MEASUREMENT INSTRUMENTS LIST	34
3.3.3 TEST PROCEDURE	34
3.3.4 DEVIATION FROM TEST STANDARD	34
3.3.5 TEST SETUP	35
3.3.6 TEST RESULTS	36
3.4 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST	40
3.4.1 LIMITS	40
3.4.2 MEASUREMENT INSTRUMENTS LIST	40
3.4.3 TEST PROCEDURE	40

<b>Table of Contents</b>	<b>Page</b>
3.4.4 DEVIATION FROM TEST STANDARD	41
3.4.5 TEST SETUP	41
3.4.6 TEST RESULTS	42
<b>3.5 HARMONIC CURRENT EMISSIONS TEST</b>	<b>50</b>
3.5.1 LIMITS	50
3.5.2 MEASUREMENT INSTRUMENTS LIST	50
3.5.3 TEST PROCEDURE	50
3.5.4 DEVIATION FROM TEST STANDARD	50
3.5.5 TEST SETUP	50
3.5.6 TEST RESULTS	51
<b>3.6 VOLTAGE FLUCTUATIONS (FLICKER) TEST</b>	<b>54</b>
3.6.1 LIMITS	54
3.6.2 MEASUREMENT INSTRUMENTS LIST	54
3.6.3 TEST PROCEDURE	54
3.6.4 DEVIATION FROM TEST STANDARD	54
3.6.5 TEST SETUP	55
3.6.6 TEST RESULTS	56
<b>4 . EMC IMMUNITY TEST</b>	<b>57</b>
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	57
4.2 GENERAL PERFORMANCE CRITERIA	60
4.3 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION	61
4.3.1 PERFORMANCE CRITERIA	61
4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	62
4.4.1 TEST SPECIFICATION	62
4.4.2 MEASUREMENT INSTRUMENTS	62
4.4.3 TEST PROCEDURE	62
4.4.4 DEVIATION FROM TEST STANDARD	63
4.4.5 TEST SETUP	63
4.4.6 TEST RESULTS	64
4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	68
4.5.1 TEST SPECIFICATION	68
4.5.2 MEASUREMENT INSTRUMENTS	68
4.5.3 TEST PROCEDURE	68
4.5.4 DEVIATION FROM TEST STANDARD	69
4.5.5 TEST SETUP	69
4.5.6 TEST RESULTS	71
4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)	82
4.6.1 TEST SPECIFICATION	82
4.6.2 MEASUREMENT INSTRUMENTS	82
4.6.3 TEST PROCEDURE	82
4.6.4 DEVIATION FROM TEST STANDARD	82
4.6.5 TEST SETUP	83
4.6.6 TEST RESULTS	84

<b>Table of Contents</b>	<b>Page</b>
<b>4.7 SURGE IMMUNITY TEST (SURGE)</b>	<b>85</b>
4.7.1 TEST SPECIFICATION	85
4.7.2 MEASUREMENT INSTRUMENTS	85
4.7.3 TEST PROCEDURE	85
4.7.4 DEVIATION FROM TEST STANDARD	85
4.7.5 TEST SETUP	86
4.7.6 TEST RESULTS	87
<b>4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY</b>	
<b>FIELDS TEST (CS)</b>	<b>88</b>
4.8.1 TEST SPECIFICATION	88
4.8.2 MEASUREMENT INSTRUMENTS	88
4.8.3 TEST PROCEDURE	88
4.8.4 DEVIATION FROM TEST STANDARD	89
4.8.5 TEST SETUP	89
4.8.6 TEST RESULTS	91
<b>4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)</b>	<b>107</b>
4.9.1 TEST SPECIFICATION	107
4.9.2 MEASUREMENT INSTRUMENTS	107
4.9.3 TEST PROCEDURE	107
4.9.4 DEVIATION FROM TEST STANDARD	107
4.9.5 TEST SETUP	108
4.9.6 TEST RESULTS	109
<b>4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY</b>	
<b>TEST (DIPS)</b>	<b>110</b>
4.10.1 TEST SPECIFICATION	110
4.10.2 MEASUREMENT INSTRUMENTS	110
4.10.3 TEST PROCEDURE	110
4.10.4 DEVIATION FROM TEST STANDARD	110
4.10.5 TEST SETUP	110
4.10.6 TEST RESULTS	111
<b>5 . EUT TEST PHOTO</b>	<b>112</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-EMC-1-2403G103	R00	This is a copy report which referencing test data are provided from test report (BTL-EMC-1-2108C114). The device is identical to the original one recorded in the referencing report. 1. The brand name, model name, applicant and manufacturer information are changed. 2. Removed the factory information. 3. Removed the Mfr/Brand information of support units. 4. Removed the UK standards. Other are kept the same.	May 06, 2024	Valid

Remark: For the original report (BTL-EMC-1-2108C114), the test data, data evaluation, and equipment configuration contained was accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission			
Standard(s)	Test Item		Result
EN 55032:2015+A11:2020	Radiated emissions up to 1 GHz		PASS
	Radiated emissions above 1 GHz		PASS
	Radiated emissions from FM receivers		N/A
	Conducted emissions AC mains power port		PASS
	Asymmetric mode conducted emissions	AAN	PASS
		Current Probe	N/A
		CP+CVP	N/A
Conducted differential voltage emissions		N/A	

Standard(s)	Test Item	Result
EN IEC 61000-3-2:2019	Harmonic current	PASS
EN 61000-3-3:2013+A1:2019	Voltage fluctuations (Flicker)	PASS

Immunity			
Standard(s)	Ref Standard(s)	Test Item	Result
EN 55035:2017+A11:2020	IEC 61000-4-2:2008	ESD	PASS
	IEC 61000-4-3:2020	RS	PASS
	IEC 61000-4-4:2012	EFT	PASS
	IEC 61000-4-5:2014+AMD1:2017	Surge	PASS
	IEC 61000-4-6:2013	CS	PASS
	IEC 61000-4-8:2009	PFMF	PASS
	IEC 61000-4-11:2020	Dips	PASS

Standard(s)	Section	Test Item	Result
EN 55035:2017+A11:2020	4.2.7	BIN-R	N/A
	4.2.7	BIN-I	N/A

NOTE:

(1) "N/A" denotes test is not applicable to this device.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ ,(dB)
DG-CB01 (3m)	CISPR	30MHz ~ 200MHz	V	4.62
		30MHz ~ 200MHz	H	3.58
		200MHz ~ 1,000MHz	V	4.44
		200MHz ~ 1,000MHz	H	4.36

### B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-CB01 (3m)	CISPR	1GHz ~ 6GHz	3.72

### C. Conducted emissions AC mains power port measurement:

Test Site	Method	Measurement Frequency Range	$U$ ,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

### D. Asymmetric mode conducted emissions measurement:

Test Site	Method	Test Item	$U$ ,(dB)
DG-C02	CISPR	AAN Cat.5 LCL = 65 ... 50 dB	3.86

### E. Harmonic current / Voltage fluctuations (Flicker) measurement:

Test Site	Method	Item	$U$ (%)
DG-C01	EN IEC 61000-3-2	Current	0.593
	EN 61000-3-3	Voltage	0.595



## F. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	IEC 61000-4-2	Rise time tr	6.30%
		Peak current Ip	6.70%
		Current at 30 ns	6.40%
		Current at 60 ns	6.90%
DG-CB05	IEC 61000-4-3 (80MHz~6GHz)	Electromagnetic field immunity test	2.00dB
		On-ear acoustic & Acoustic measurements on loudspeakers	2.00dB
		Electrical measurements	2.00dB
		Measuring the demodulation on analogue wired network lines	2.00dB
DG-SR05	IEC 61000-4-4	Peak voltage (VP)	3.8%
		Rise time (tr)	4.4%
		Pulse width(tw)	4.2%
		Pulse Freq.(kHz)	0.7%
		Burst Duration(ms)	1.5%
		Burst Period(ms)	1.4%
		Peak voltage (VP)-with clamp	3.7%
		Rise time (tr) -with clamp	4.4%
		Pulse width(tw) -with clamp	4.4%
DG-SR05	IEC 61000-4-5	Open-Circuit Output Voltage (1.2/50us)	4.0%
		Open circuit front time (1.2/50us)	6.2%
		Open circuit time of half value (1.2/50us)	4.8%
DG-CB06	IEC 61000-4-6 (150kHz-80MHz)	CDN	1.32dB
		EM clamp	3.14dB
		On-ear acoustic & Acoustic measurements on loudspeakers	1.34dB
		Electrical measurements	1.32dB
		Measuring the demodulation on analogue wired network lines	1.32dB
DG-SR05	IEC 61000-4-8	Magnetic Field Strength	2.38%
DG-SR05	IEC 61000-4-11	DIP Amplitude	3.6%
		DIP Time Event	4.0%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.


### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
Radiated emissions up to 1 GHz	25°C	60%	Sparrow Liu
Radiated emissions above 1 GHz	25°C	60%	Sparrow Liu
Conducted emissions AC mains power port	25°C	53%	Aries Tang
Asymmetric mode conducted emissions	25°C	53%	Aries Tang
Harmonic current	25°C	55%	Max Tan
Voltage fluctuations (Flicker)	25°C	55%	Max Tan

Test Item	Temperature	Humidity	Pressure	Tested By
ESD	22°C	45%	1012hPa	Tohru Cong
RS	23°C	45%	/	Hunter Xu
EFT	23°C	46%	/	Richard Zhang
Surge	23°C	46%	/	Richard Zhang
CS	23°C	48%	/	Peppa Zhang
PFMF	23°C	46%	/	Richard Zhang
Dips	23°C	46%	/	Richard Zhang

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Video Phone
Brand Name	XONTEL
Test Model	XT-50G
Series Model	N/A
Model Difference(s)	N/A
Power Source	1# DC voltage supplied from AC adapter. Model: F18L16-120150SPAV (EU) Model: F18L18-120150SPAB (UK) 2# Supplied from PoE.
Power Rating	1# I/P: 100-240V~ 50/60Hz 0.6A O/P: 12.0V  1.5A 2# DC 48V
Connecting I/O Port(s)	1* DC port 1* PC port 1* LAN port 1* Headphone port 1* Handset port 1* USB port
Classification of EUT	Class B
Highest Internal Frequency(Fx)	Exceeds 108MHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	HANDSET+2.4G WIFI+video+BT
Mode 2	HANDSFREE+5G WIFI+video+BT
Mode 3	RJ9 Earphone+5G WIFI+video+BT
Mode 4	LAN 100M/bps
Mode 5	LAN 10M/bps
Mode 6	PC PORT 100M/bps
Mode 7	PC PORT 10M/bps

Radiated emissions up to 1 GHz test	
Final Test Mode	Description
Mode 2	HANDSFREE+5G WIFI+video+BT

Radiated emissions Above 1 GHz test	
Final Test Mode	Description
Mode 2	HANDSFREE+5G WIFI+video+BT

Conducted emissions AC mains power port test	
Final Test Mode	Description
Mode 3	RJ9 Earphone+5G WIFI+video+BT

Asymmetric mode conducted emissions test	
Final Test Mode	Description
Mode 4	LAN 100M/bps
Mode 5	LAN 10M/bps
Mode 6	PC PORT 100M/bps
Mode 7	PC PORT 10M/bps

Harmonic current & Voltage fluctuations (Flicker) Test	
Final Test Mode	Description
Mode 3	RJ9 Earphone+5G WIFI+video+BT

For Immunity Test	
Final Test Mode	Description
Mode 1	HANDSET+2.4G WIFI+video+BT
Mode 2	HANDSFREE+5G WIFI+video+BT
Mode 3	RJ9 Earphone+5G WIFI+video+BT

Note:

1. For EMI test: Adapter supply evaluated Mode 1-Mode 3, the worst case is Mode 2 for radiated emissions, Mode 3 for conducted emissions and PoE supply evaluated the worst mode. Only the worst case is recorded.
2. RS: The Front, Rear, Left and Right were evaluated. The worst placement direction is Rear and recorded in this report.
3. The product supports BT&2.4G&5G WIFI function.  
The frequency exemption are 2400-2483.5MHz, 5150-5250MHz.
4. Radiated emission above 1GHz tested with 2.4G&5G filter.

### 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:


#### Adapter Supply:


1. EUT connected to Notebook via RJ45 Cable.
2. EUT connected to Switch via RJ45 Cable.
3. Switch connected to IP Phone via RJ45 Cable.
4. EUT connected to Headphone via RJ9 Cable.
5. EUT connected to Bluetooth Earphone via BT.
6. EUT connected to Router via 2.4G WIFI and 5G WIFI.
7. EUT connected to Adapter via DC Cable.

#### PoE Supply:

1. EUT connected to Notebook via RJ45 Cable.
2. EUT connected to Switch via RJ45 Cable.
3. Switch connected to IP Phone via RJ45 Cable.
4. EUT connected to Headphone via RJ9 Cable.
5. EUT connected to Bluetooth Earphone via BT.
6. EUT connected to Router via 2.4G WIFI and 5G WIFI.

### 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

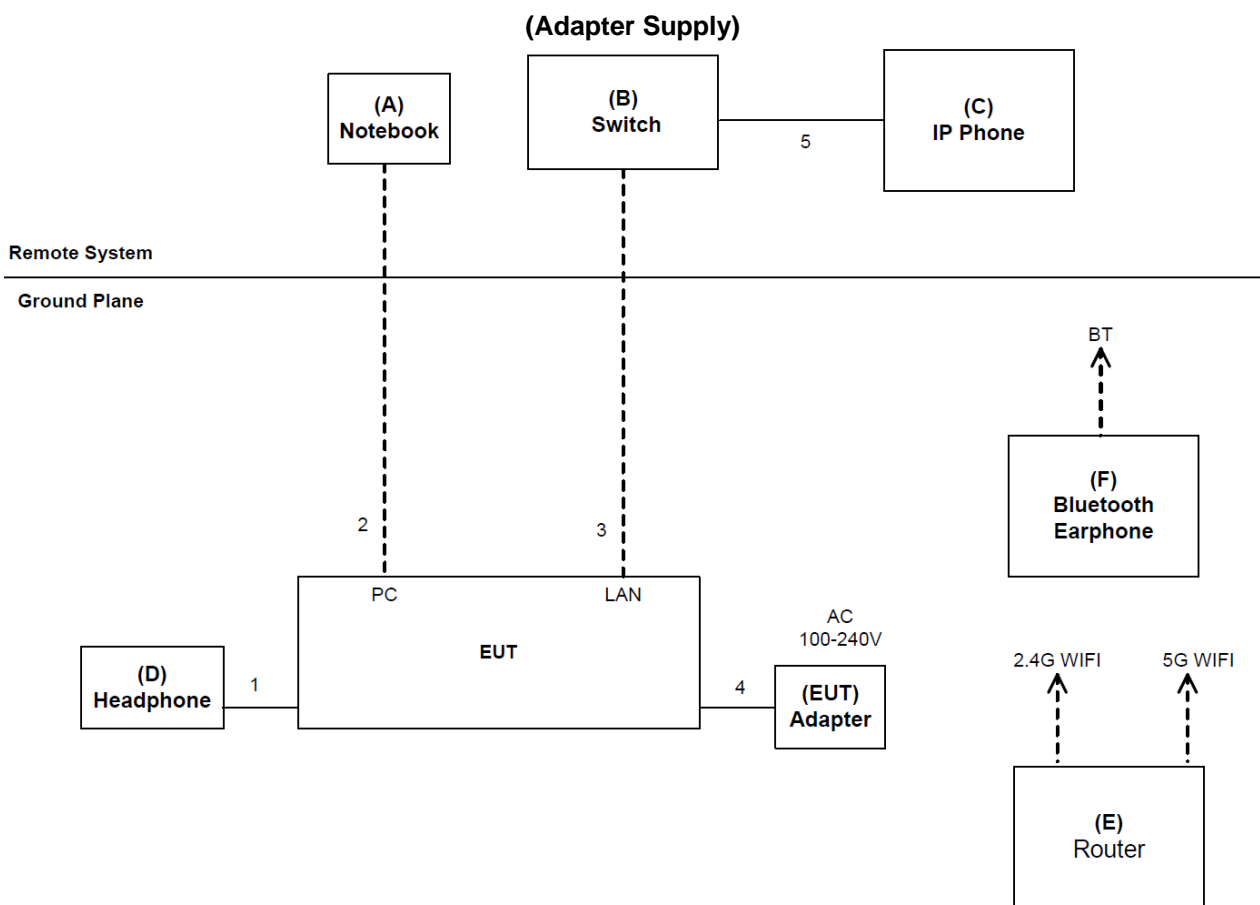

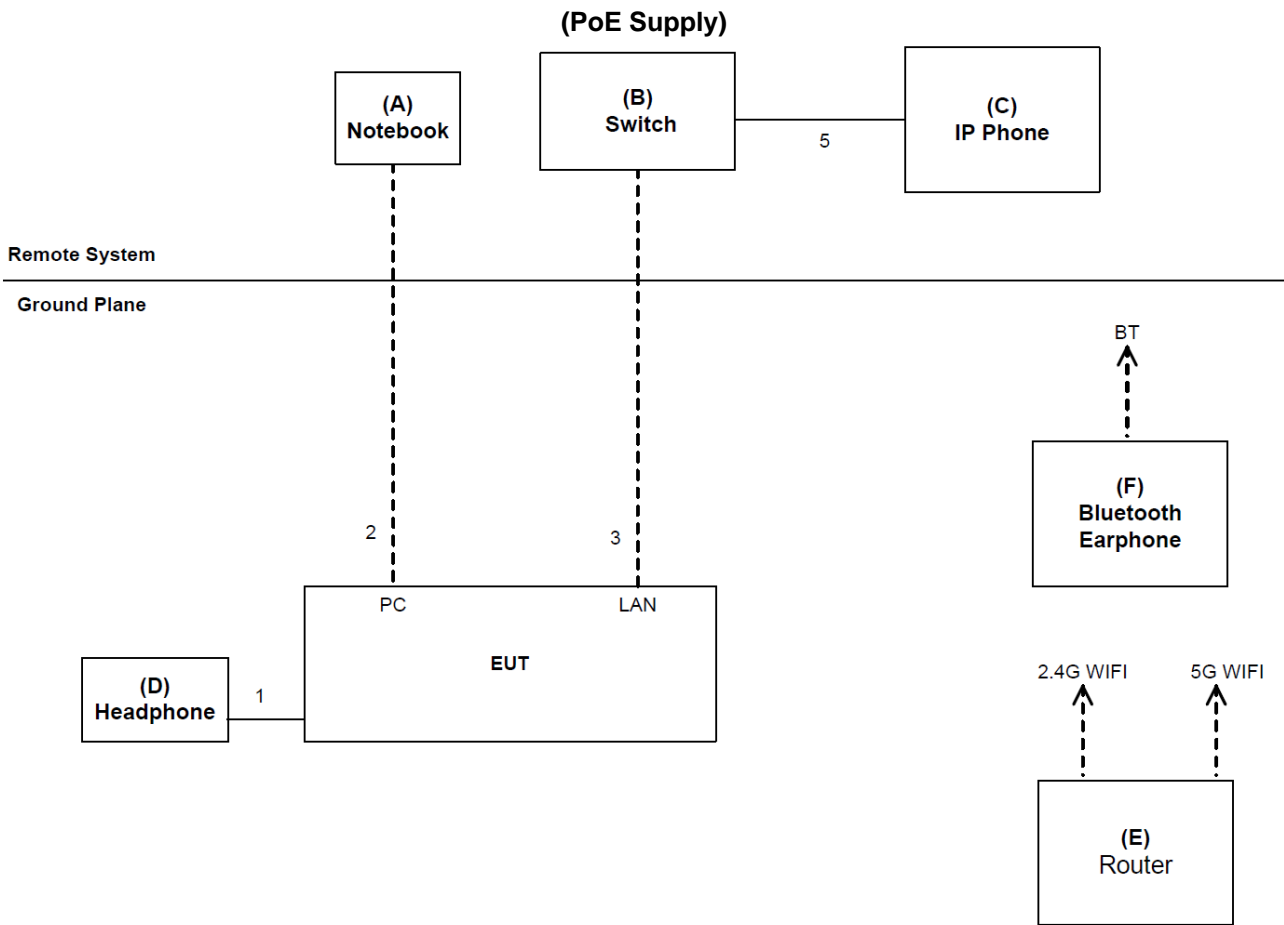

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.
A	Notebook	G40	YB09261386
B	Switch	DGS-1008P	N/A
C	IP Phone	V67	N/A
D	Headphone	A310QD	N/A
E	Router	HG255s	Q4TS17726906091
F	Bluetooth Earphone	M9	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ9 Cable	NO	NO	1m
2	RJ45 Cable	NO	NO	10m
3	RJ45 Cable	NO	NO	10m
4	DC Cable	NO	NO	1.5m
5	RJ45 Cable	NO	NO	1.2m

### 3. EMC EMISSION TEST

#### 3.1 RADIATED EMISSIONS UP TO 1 GHz

##### 3.1.1 LIMITS

Class B equipment up to 1 GHz

Frequency Range MHz	Measurement			Class B limits dB( $\mu$ V/m)
	Facility	Distance m	Detector type/ bandwidth	
30 - 230	SAC	3	Quasi peak / 120 kHz	40
230 - 1000				47

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

##### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	Apr. 14, 2022
2	Amplifier	SONOMA	310N	186128	Feb. 28, 2022
3	MXE EMI Receiver	Keysight	N9038A	MY56400091	Feb. 27, 2022
4	Cable	emci	LMR-400(30MHz-1 GHz)(7m+7m)	N/A	Sep. 23, 2022
5	Controller	ETS-Lindgren	2090	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.




### 3.1.3 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.5 TEST SETUP

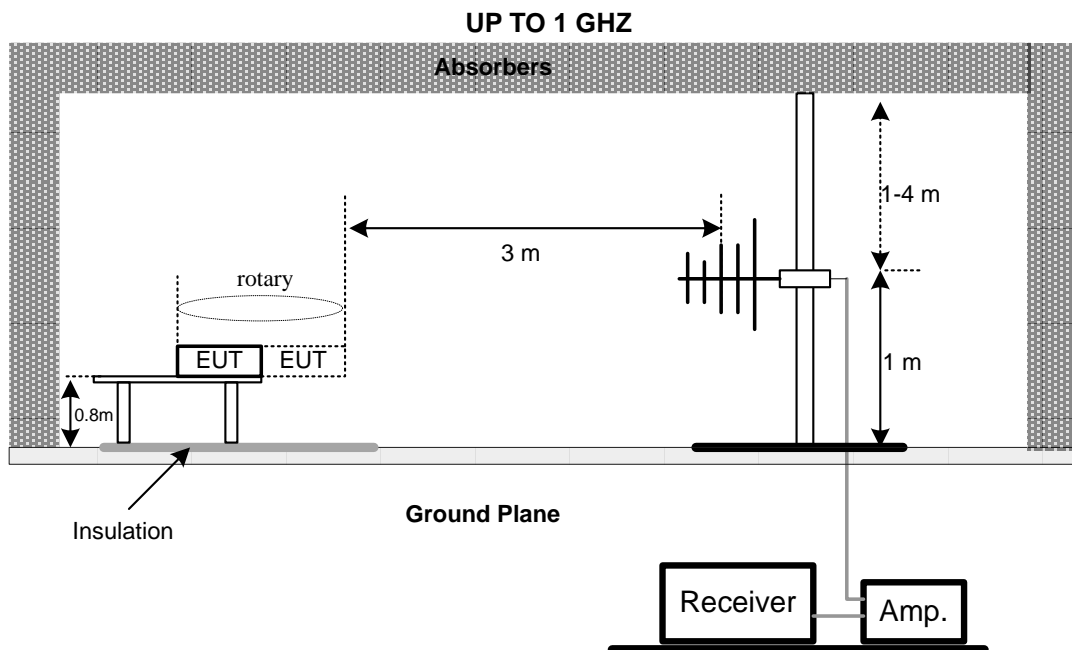

### 3.1.6 MEASUREMENT DISTANCE

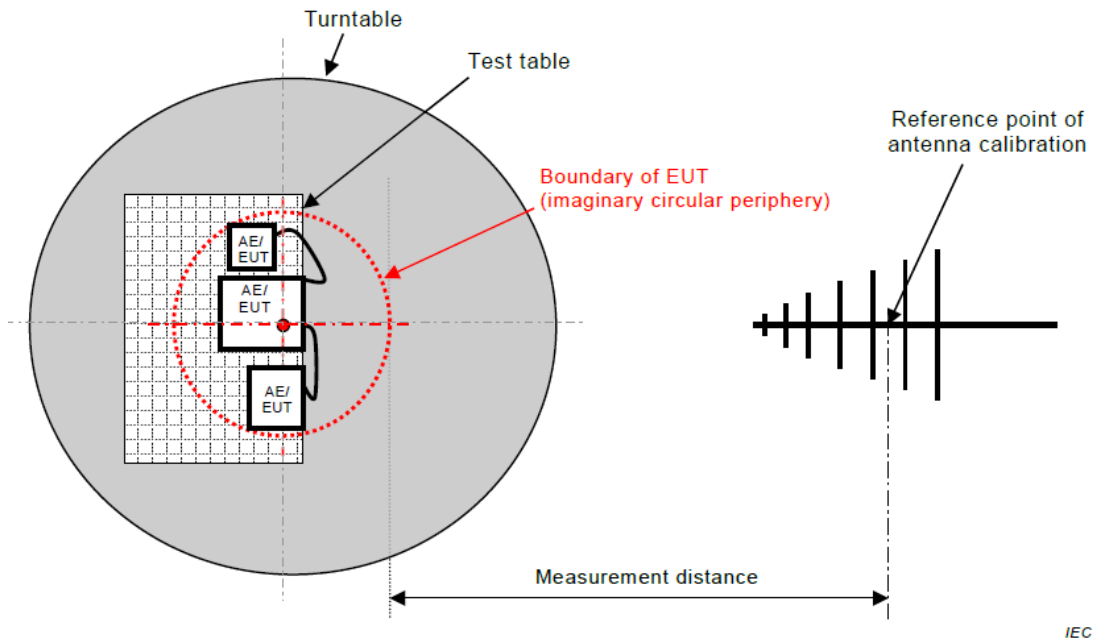


Figure C.1 – Measurement distance


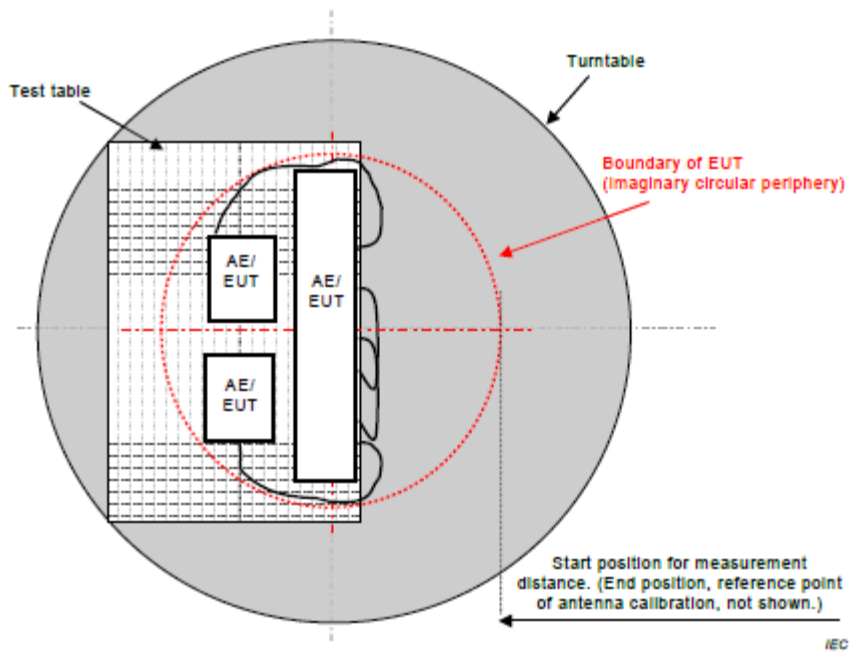


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.1.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		

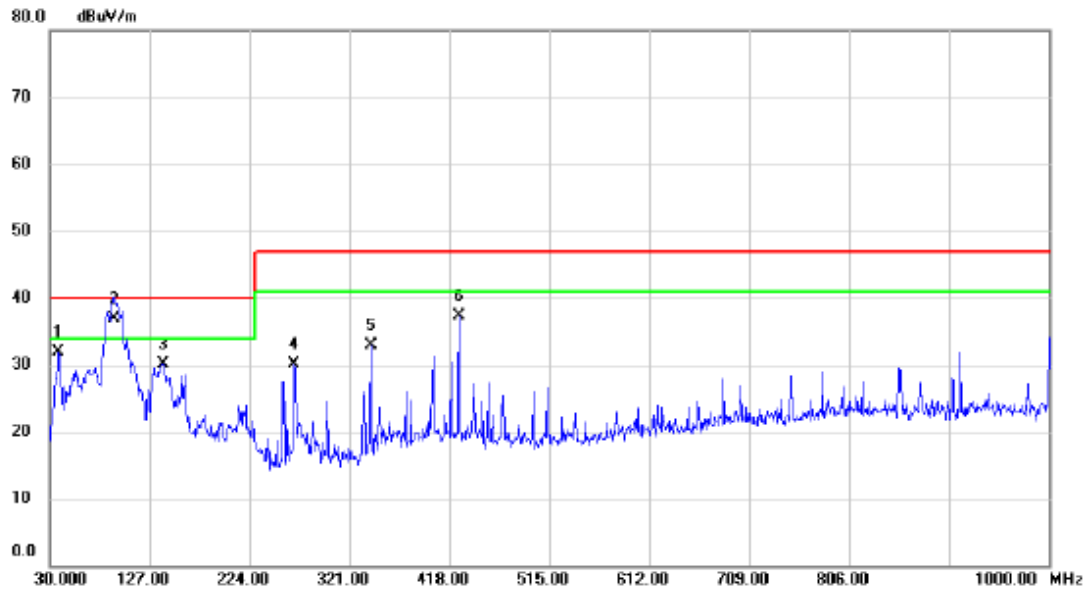


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38.7300	49.46	-17.62	31.84	40.00	-8.16	QP	
2	*	92.0800	59.40	-22.59	36.81	40.00	-3.19	QP	
3		140.5800	52.66	-22.59	30.07	40.00	-9.93	QP	
4		267.6500	46.78	-16.69	30.09	47.00	-16.91	QP	
5		342.3400	47.14	-14.20	32.94	47.00	-14.06	QP	
6		427.7000	49.07	-11.75	37.32	47.00	-9.68	QP	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		

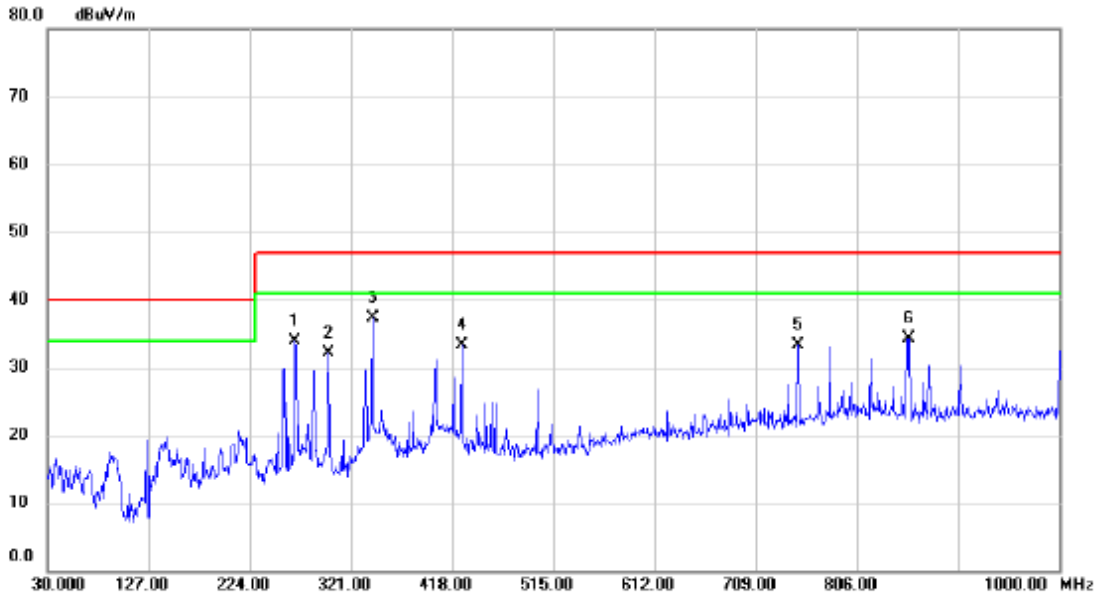


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	267.6500	50.60	-16.69	33.91	47.00	-13.09	QP	
2	299.6600	48.04	-15.98	32.06	47.00	-14.94	QP	
3 *	342.3400	51.51	-14.20	37.31	47.00	-9.69	QP	
4	427.7000	45.05	-11.75	33.30	47.00	-13.70	QP	
5	749.7400	38.78	-5.47	33.31	47.00	-13.69	QP	
6	855.4700	38.56	-4.30	34.26	47.00	-12.74	QP	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2		

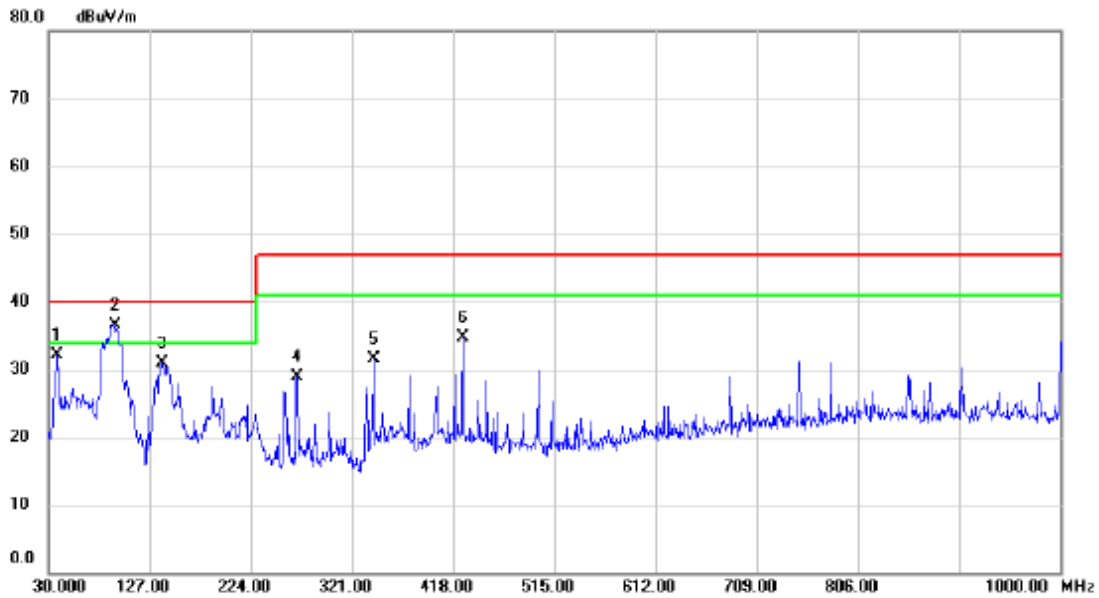


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.7600	49.37	-17.22	32.15	40.00	-7.85	QP	
2 *	94.0200	59.01	-22.42	36.59	40.00	-3.41	QP	
3	139.6100	53.67	-22.70	30.97	40.00	-9.03	QP	
4	268.6200	45.52	-16.66	28.86	47.00	-18.14	QP	
5	342.3400	45.61	-14.20	31.41	47.00	-15.59	QP	
6	427.7000	46.49	-11.75	34.74	47.00	-12.26	QP	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2		

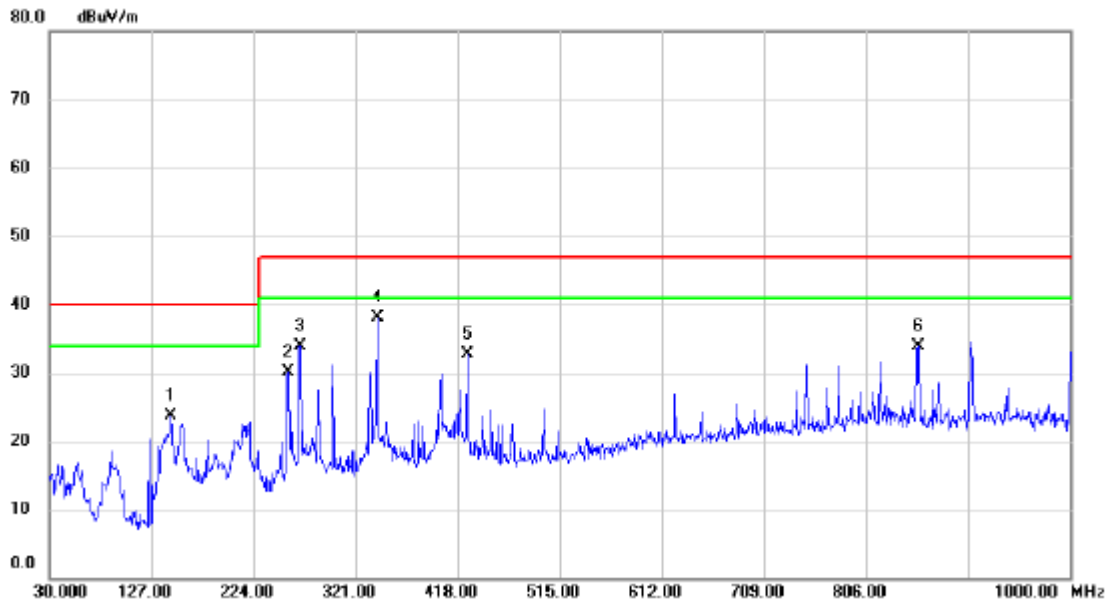


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		145.4300	45.65	-22.03	23.62	40.00	-16.38	QP	
2		256.9800	47.03	-16.92	30.11	47.00	-16.89	QP	
3		268.6200	50.65	-16.66	33.99	47.00	-13.01	QP	
4	*	342.3400	52.27	-14.20	38.07	47.00	-8.93	QP	
5		427.7000	44.45	-11.75	32.70	47.00	-14.30	QP	
6		855.4700	38.22	-4.30	33.92	47.00	-13.08	QP	

Test Voltage	DC 48V	Polarization	Vertical
Test Mode	Mode 2		

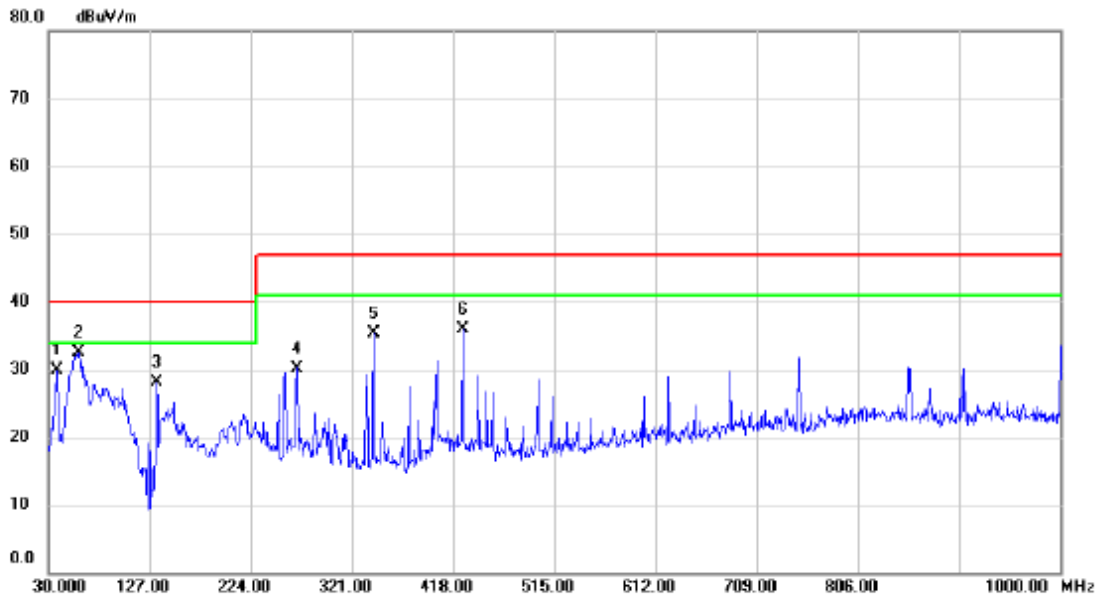

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	47.13	-17.22	29.91	40.00	-10.09	QP	
2	*	59.1000	55.08	-22.51	32.57	40.00	-7.43	QP	
3		133.7900	51.24	-23.11	28.13	40.00	-11.87	QP	
4		268.6200	46.86	-16.66	30.20	47.00	-16.80	QP	
5		342.3400	49.49	-14.20	35.29	47.00	-11.71	QP	
6		427.7000	47.58	-11.75	35.83	47.00	-11.17	QP	

Test Voltage	DC 48V	Polarization	Horizontal
Test Mode	Mode 2		

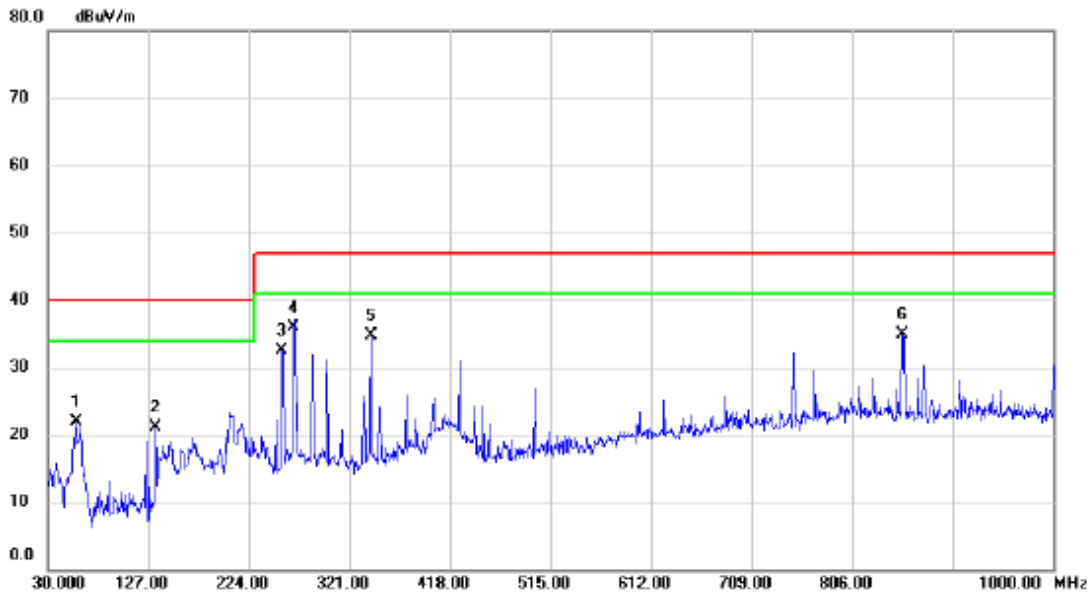

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	57.1600	44.05	-22.20	21.85	40.00	-18.15	QP	
2	133.7900	44.27	-23.11	21.16	40.00	-18.84	QP	
3	256.0100	49.38	-16.94	32.44	47.00	-14.56	QP	
4 *	267.6500	52.52	-16.69	35.83	47.00	-11.17	QP	
5	342.3400	48.97	-14.20	34.77	47.00	-12.23	QP	
6	854.5000	39.29	-4.30	34.99	47.00	-12.01	QP	



### 3.2 RADIATED EMISSIONS ABOVE 1 GHZ

#### 3.2.1 LIMITS

Class B equipment above 1 GHz

Frequency Range MHz	Measurement			Class B limits dB( $\mu$ V/m)
	Facility	Distance m	Detector type/bandwidth	
1000 - 3000	FSOATS	3	Average / 1 MHz	50
3000 - 6000				54
1000 - 3000			Peak / 1 MHz	70
3000 - 6000				74

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ )	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108 < F_x \leq 500$ MHz	2 GHz
$500 < F_x \leq 1000$ MHz	5 GHz
$F_x > 1$ GHz	5 x $F_x$ up to a maximum of 6 GHz

#### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antennas	ETS-LINDGREN	3117-PA	224991	Apr. 21, 2022
2	MXA Signal Analyzer	Keysight	N9020B	MY57100162	Feb. 28, 2022
3	Cable	Micable Inc.	B10-01-01-2M	18072745	Jan. 06, 2022
4	Preamplifier	ETS-LINDGREN	3117-PA	224991	Jul. 10, 2022
5	Cable	Micable Inc.	B10-01-01-15M(10 MHz~26.5GHz)	18047122	Jan. 06, 2022
6	Controller	ETS-Lindgren	2090	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Band Reject Filter	Wairwright Instruments GmbH	WRCG 2400/2483-2375/25 05-50/10SS	16	Feb. 28, 2022
9	Band Reject Filter	Micro-Tronics	BRC50703-01	7	Feb. 27, 2022

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

### 3.2.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then AVG detector mode re-measured.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.2.5 TEST SETUP

#### ABOVE 1 GHZ

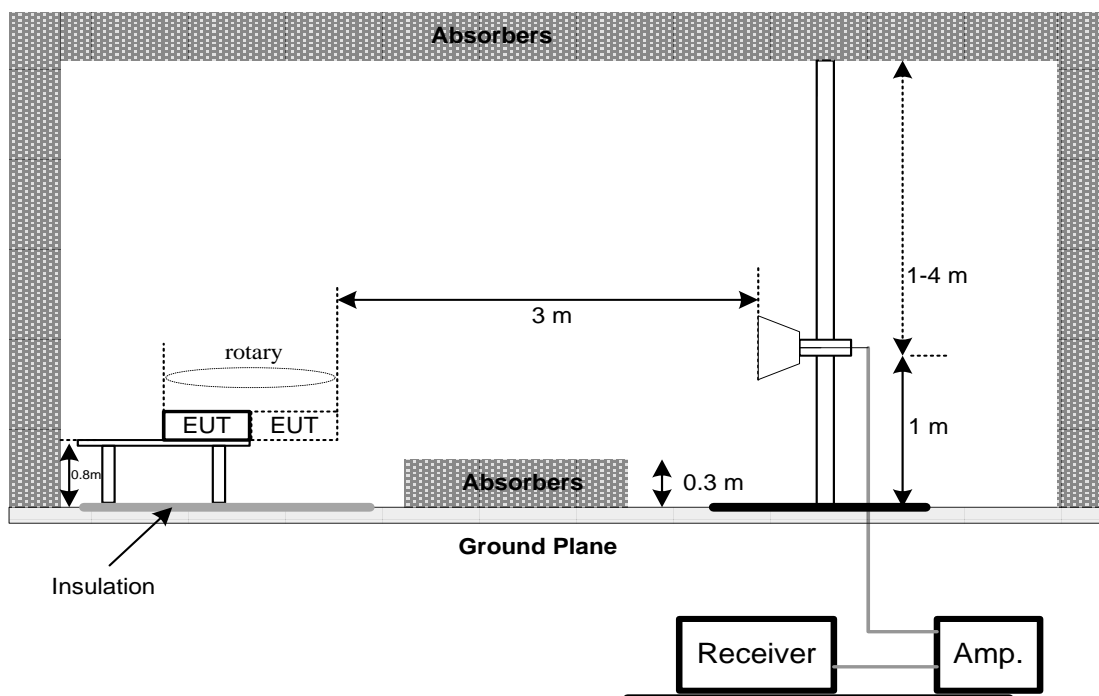

### 3.2.6 MEASUREMENT DISTANCE

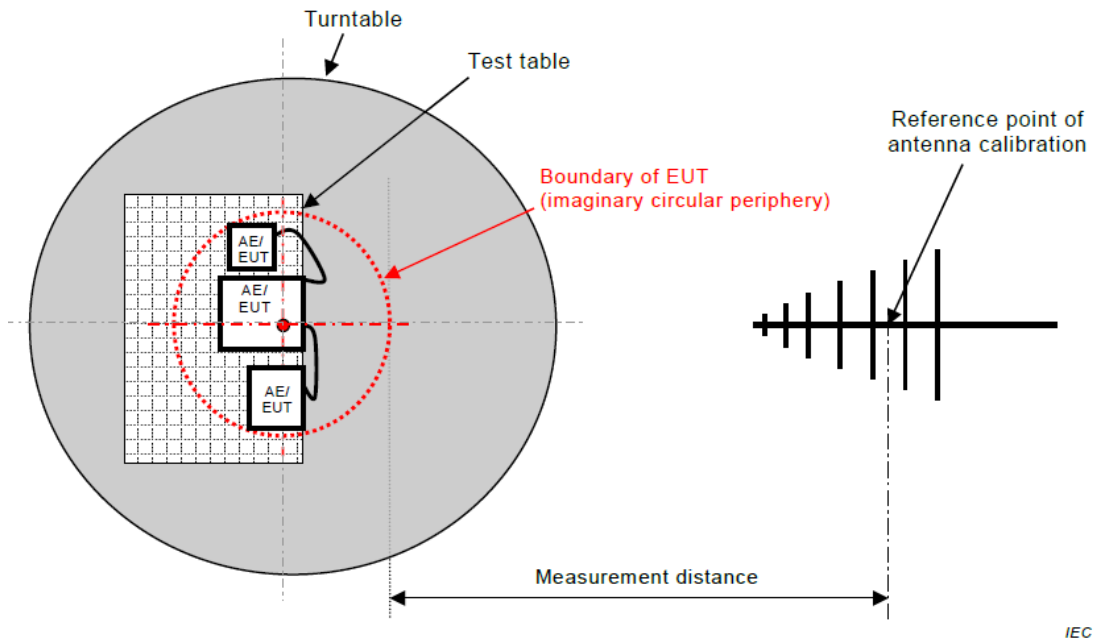


Figure C.1 – Measurement distance


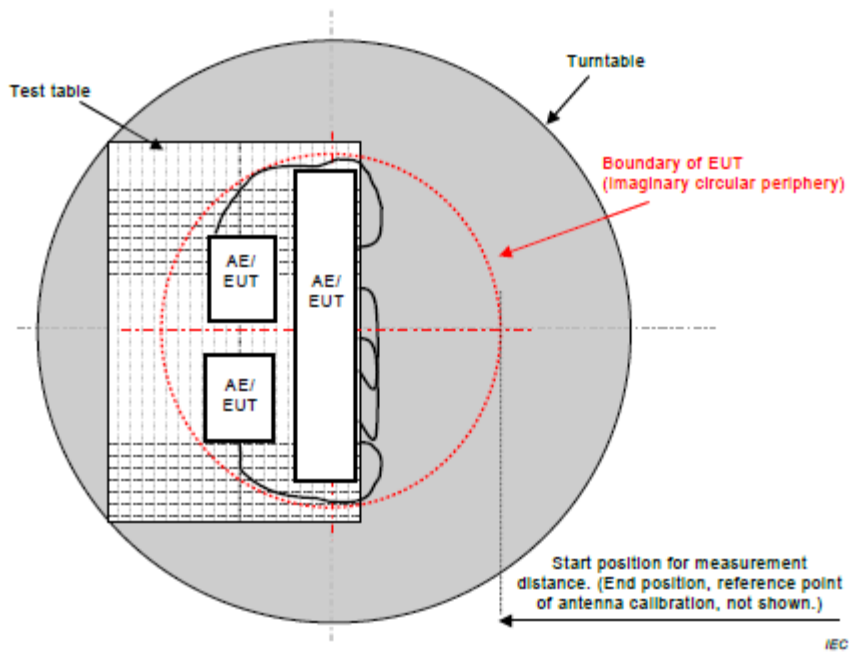


Figure C.2 – Boundary of EUT, Local AE and associated cabling


### 3.2.7 TEST RESULTS

Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

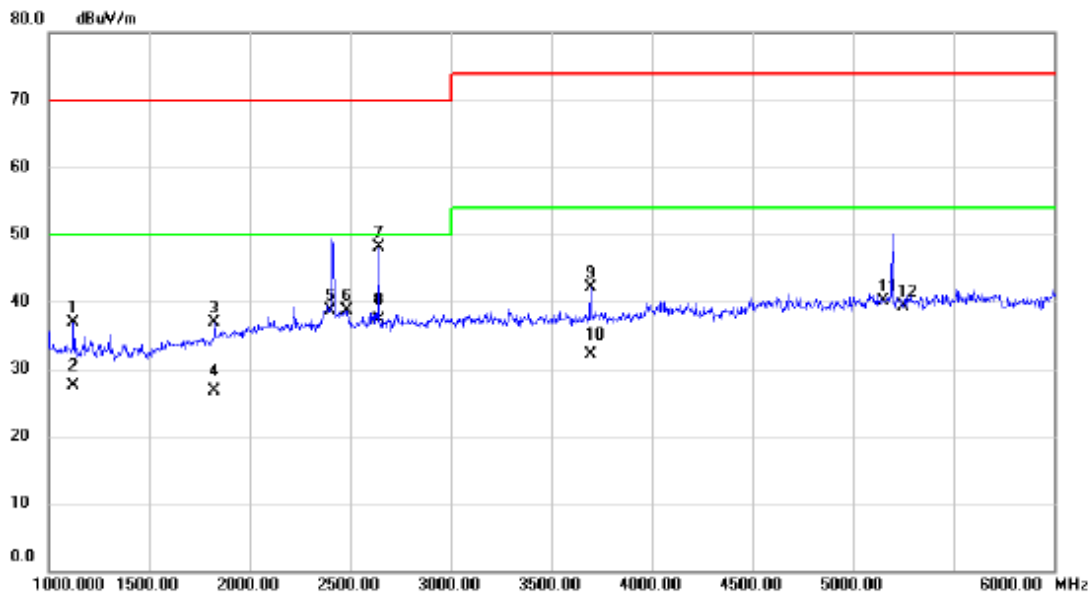


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1125.000	53.31	-16.36	36.95	70.00	-33.05	peak	
2		1125.000	43.96	-16.36	27.60	50.00	-22.40	AVG	
3		1825.000	50.88	-14.05	36.83	70.00	-33.17	peak	
4		1825.000	40.85	-14.05	26.80	50.00	-23.20	AVG	
5		2400.000	50.11	-11.43	38.68	70.00	-31.32	peak	
6		2483.500	50.00	-11.21	38.79	70.00	-31.21	peak	
7		2640.000	58.91	-10.71	48.20	70.00	-21.80	peak	
8	*	2640.000	47.99	-10.71	37.28	50.00	-12.72	AVG	
9		3695.000	49.63	-7.62	42.01	74.00	-31.99	peak	
10		3695.000	39.79	-7.62	32.17	54.00	-21.83	AVG	
11		5150.000	43.93	-3.77	40.16	74.00	-33.84	peak	
12		5250.000	43.03	-3.78	39.25	74.00	-34.75	peak	

Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

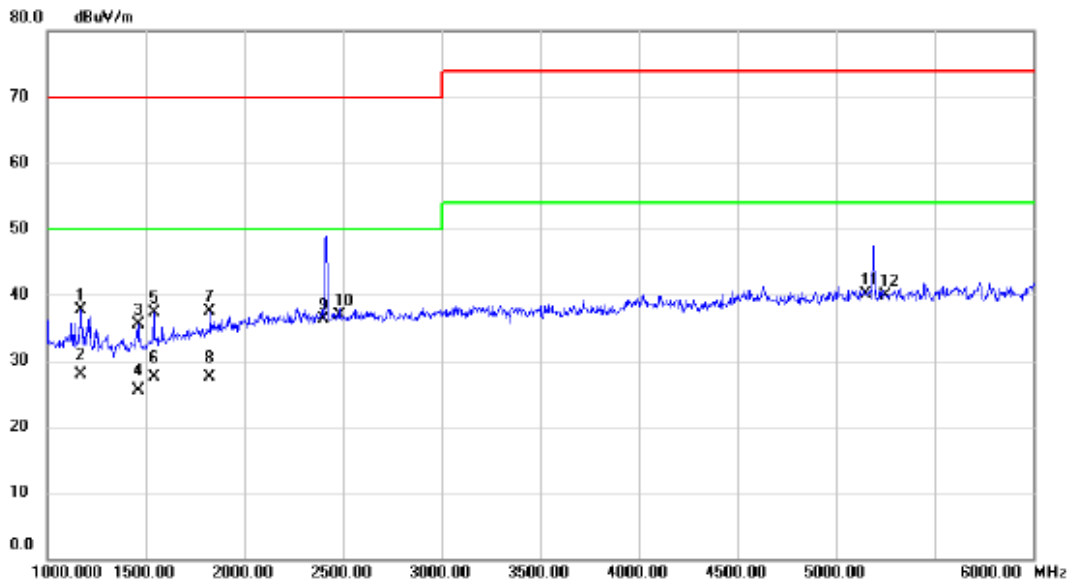


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1170.000	54.05	-16.42	37.63	70.00	-32.37	peak	
2	*	1170.000	44.26	-16.42	27.84	50.00	-22.16	AVG	
3		1460.000	52.42	-16.82	35.60	70.00	-34.40	peak	
4		1460.000	42.26	-16.82	25.44	50.00	-24.56	AVG	
5		1540.000	53.89	-16.52	37.37	70.00	-32.63	peak	
6		1540.000	43.98	-16.52	27.46	50.00	-22.54	AVG	
7		1825.000	51.58	-14.05	37.53	70.00	-32.47	peak	
8		1825.000	41.56	-14.05	27.51	50.00	-22.49	AVG	
9		2400.000	47.81	-11.43	36.38	70.00	-33.62	peak	
10		2483.500	48.02	-11.21	36.81	70.00	-33.19	peak	
11		5150.000	43.85	-3.77	40.08	74.00	-33.92	peak	
12		5250.000	43.70	-3.78	39.92	74.00	-34.08	peak	

Test Voltage	AC 110V/60Hz	Polarization	Vertical
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

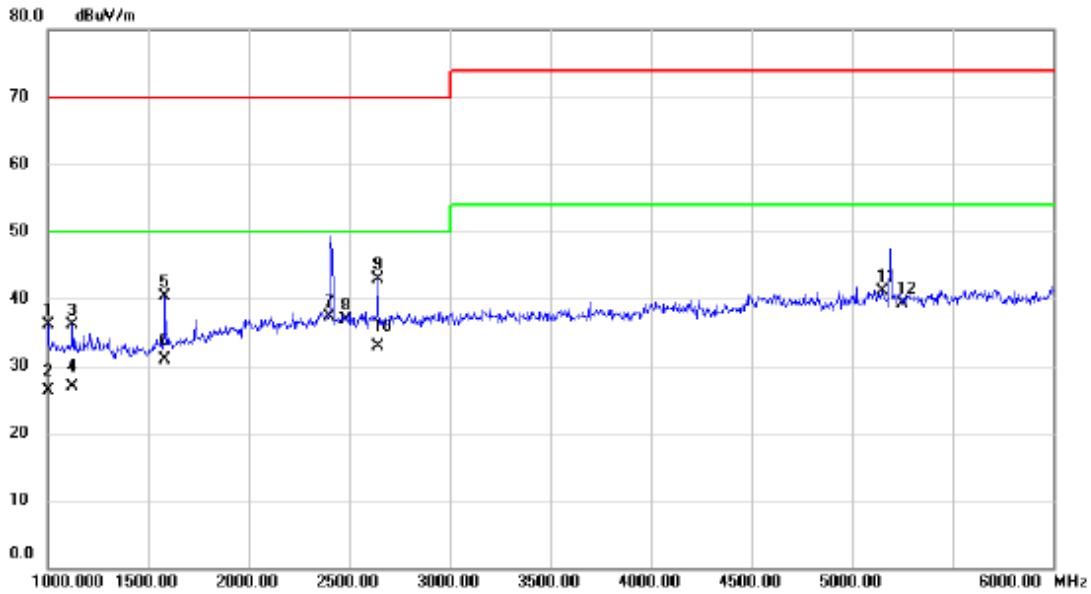


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1000.000	52.36	-16.19	36.17	70.00	-33.83	peak	
2		1000.000	42.58	-16.19	26.39	50.00	-23.61	AVG	
3		1125.000	52.47	-16.36	36.11	70.00	-33.89	peak	
4		1125.000	43.23	-16.36	26.87	50.00	-23.13	AVG	
5		1585.000	56.35	-16.13	40.22	70.00	-29.78	peak	
6		1585.000	46.96	-16.13	30.83	50.00	-19.17	AVG	
7		2400.000	48.80	-11.43	37.37	70.00	-32.63	peak	
8		2483.500	48.18	-11.21	36.97	70.00	-33.03	peak	
9		2640.000	53.67	-10.71	42.96	70.00	-27.04	peak	
10	*	2640.000	43.69	-10.71	32.98	50.00	-17.02	AVG	
11		5150.000	44.80	-3.77	41.03	74.00	-32.97	peak	
12		5250.000	43.09	-3.78	39.31	74.00	-34.69	peak	

Test Voltage	AC 110V/60Hz	Polarization	Horizontal
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

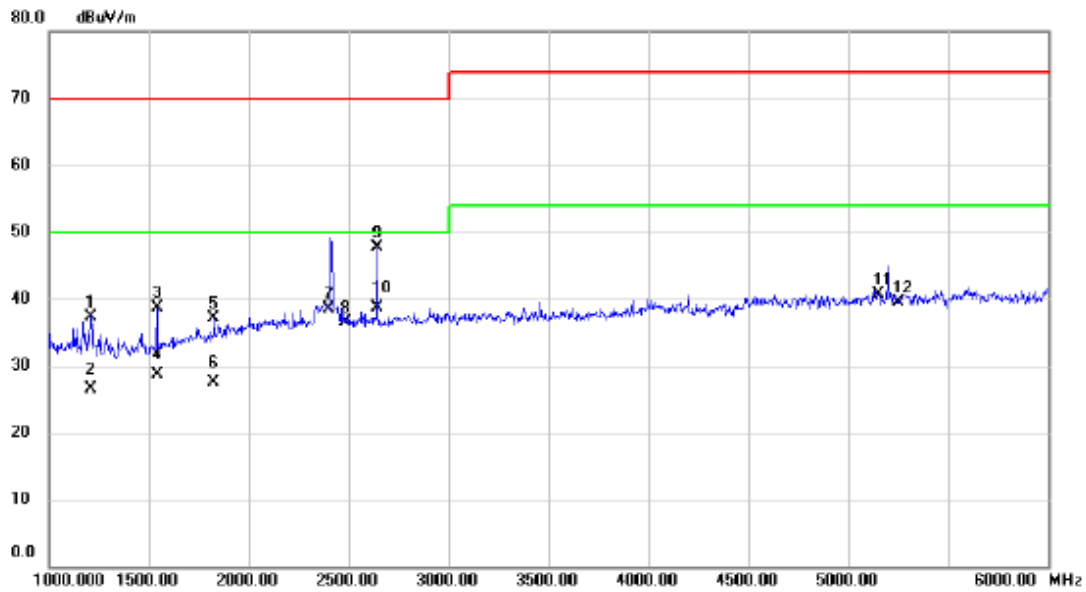

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1210.000	53.88	-16.48	37.40	70.00	-32.60	peak	
2		1210.000	42.96	-16.48	26.48	50.00	-23.52	AVG	
3		1540.000	55.14	-16.52	38.62	70.00	-31.38	peak	
4		1540.000	45.25	-16.52	28.73	50.00	-21.27	AVG	
5		1825.000	51.19	-14.05	37.14	70.00	-32.86	peak	
6		1825.000	41.63	-14.05	27.58	50.00	-22.42	AVG	
7		2400.000	49.91	-11.43	38.48	70.00	-31.52	peak	
8		2483.500	47.77	-11.21	36.56	70.00	-33.44	peak	
9		2640.000	58.47	-10.71	47.76	70.00	-22.24	peak	
10	*	2640.000	49.32	-10.71	38.61	50.00	-11.39	AVG	
11		5150.000	44.42	-3.77	40.65	74.00	-33.35	peak	
12		5250.000	43.32	-3.78	39.54	74.00	-34.46	peak	


Test Voltage	DC 48V	Polarization	Vertical
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

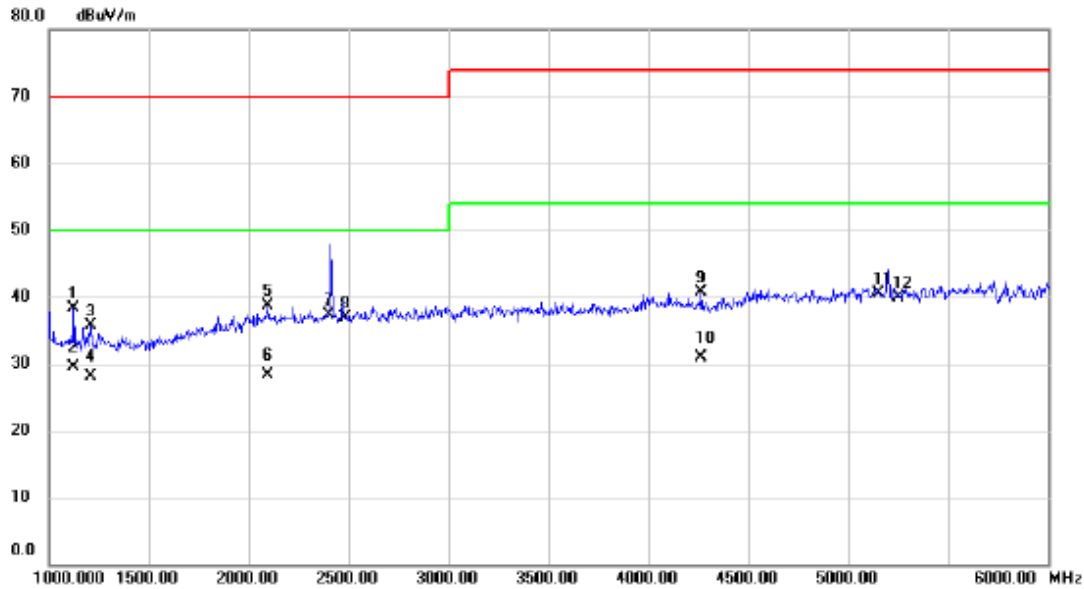

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1125.000	54.60	-16.36	38.24	70.00	-31.76	peak	
2	*	1125.000	45.86	-16.36	29.50	50.00	-20.50	AVG	
3		1210.000	52.12	-16.48	35.64	70.00	-34.36	peak	
4		1210.000	44.62	-16.48	28.14	50.00	-21.86	AVG	
5		2095.000	51.05	-12.28	38.77	70.00	-31.23	peak	
6		2095.000	40.55	-12.28	28.27	50.00	-21.73	AVG	
7		2400.000	48.67	-11.43	37.24	70.00	-32.76	peak	
8		2483.500	48.19	-11.21	36.98	70.00	-33.02	peak	
9		4265.000	46.44	-5.69	40.75	74.00	-33.25	peak	
10		4265.000	36.56	-5.69	30.87	54.00	-23.13	AVG	
11		5150.000	44.25	-3.77	40.48	74.00	-33.52	peak	
12		5250.000	43.65	-3.78	39.87	74.00	-34.13	peak	



Test Voltage	DC 48V	Polarization	Horizontal
Test Mode	Mode 2		
Note	BT(2400-2483.5MHz) and 5G WIFI(5150-5250MHz) are intentional transmissions, which are not applicable to the radiation emission requirements in this standard.		

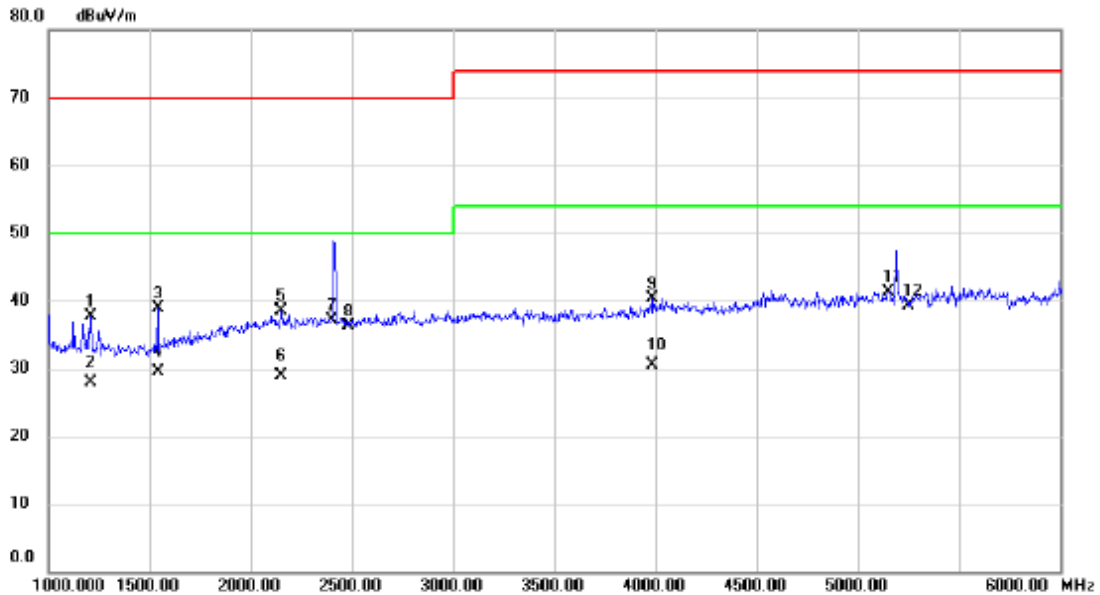

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1210.000	54.11	-16.48	37.63	70.00	-32.37	peak	
2		1210.000	44.38	-16.48	27.90	50.00	-22.10	AVG	
3		1540.000	55.47	-16.52	38.95	70.00	-31.05	peak	
4	*	1540.000	45.96	-16.52	29.44	50.00	-20.56	AVG	
5		2150.000	50.69	-12.12	38.57	70.00	-31.43	peak	
6		2150.000	41.12	-12.12	29.00	50.00	-21.00	AVG	
7		2400.000	48.61	-11.43	37.18	70.00	-32.82	peak	
8		2483.500	47.57	-11.21	36.36	70.00	-33.64	peak	
9		3985.000	46.84	-6.46	40.38	74.00	-33.62	peak	
10		3985.000	36.89	-6.46	30.43	54.00	-23.57	AVG	
11		5150.000	45.15	-3.77	41.38	74.00	-32.62	peak	
12		5250.000	43.11	-3.78	39.33	74.00	-34.67	peak	

### 3.3 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

#### 3.3.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class B equipment

Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
0.5 - 5			56
5 - 30			60
0.15 - 0.5	AMN	Average / 9 kHz	56-46
0.5 - 5			46
5 - 30			50

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 3.3.5 TEST SETUP

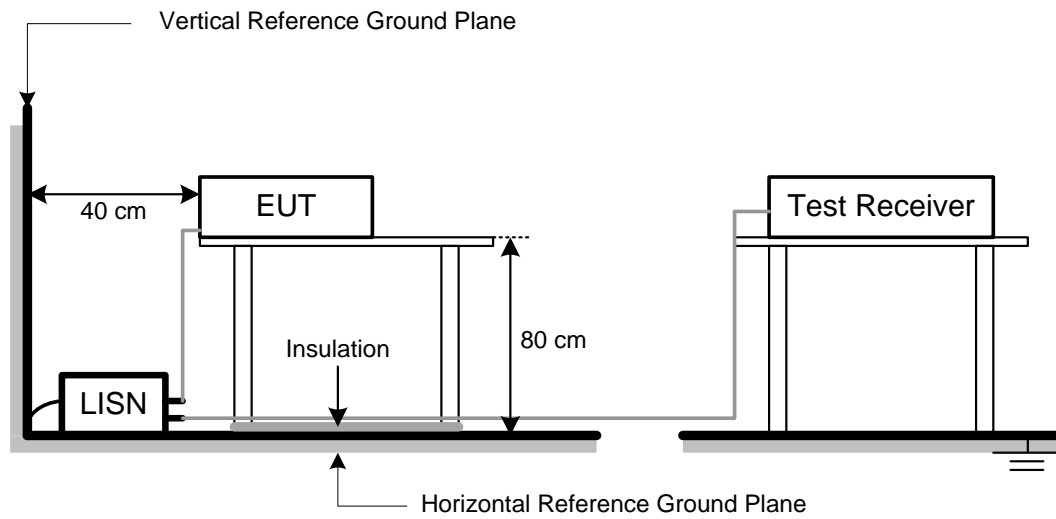


### 3.3.6 TEST RESULTS

Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Mode 3		

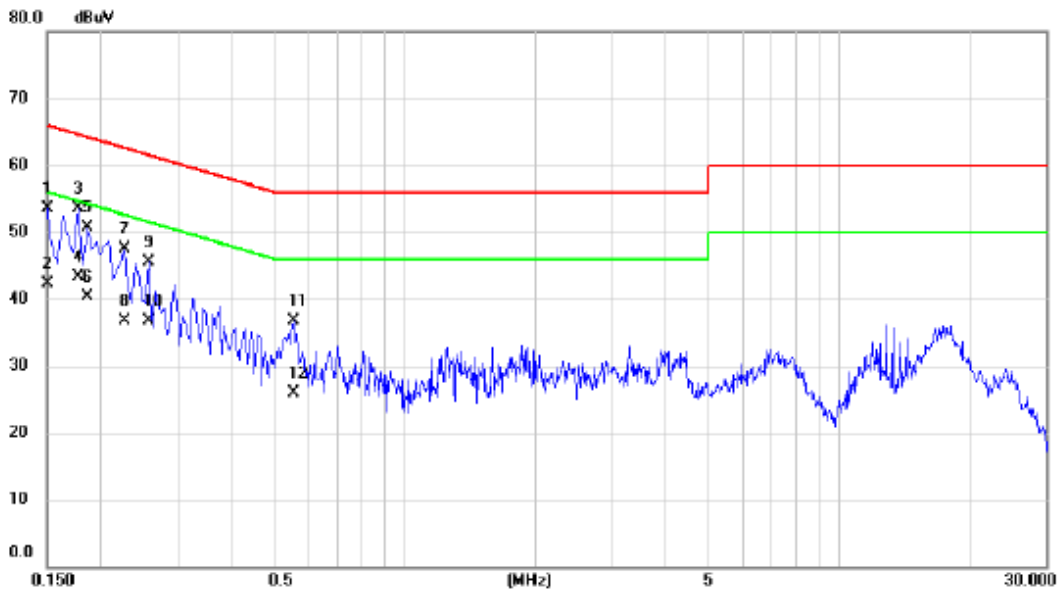


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	43.82	9.67	53.49	66.00	-12.51	QP	
2		0.1500	32.60	9.67	42.27	56.00	-13.73	AVG	
3	*	0.1770	43.64	9.84	53.48	64.63	-11.15	QP	
4		0.1770	33.50	9.84	43.34	54.63	-11.29	AVG	
5		0.1860	40.79	9.86	50.65	64.21	-13.56	QP	
6		0.1860	30.40	9.86	40.26	54.21	-13.95	AVG	
7		0.2265	37.53	9.89	47.42	62.58	-15.16	QP	
8		0.2265	26.90	9.89	36.79	52.58	-15.79	AVG	
9		0.2580	35.73	9.87	45.60	61.50	-15.90	QP	
10		0.2580	26.80	9.87	36.67	51.50	-14.83	AVG	
11		0.5550	26.74	9.94	36.68	56.00	-19.32	QP	
12		0.5550	15.90	9.94	25.84	46.00	-20.16	AVG	

Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Mode 3		

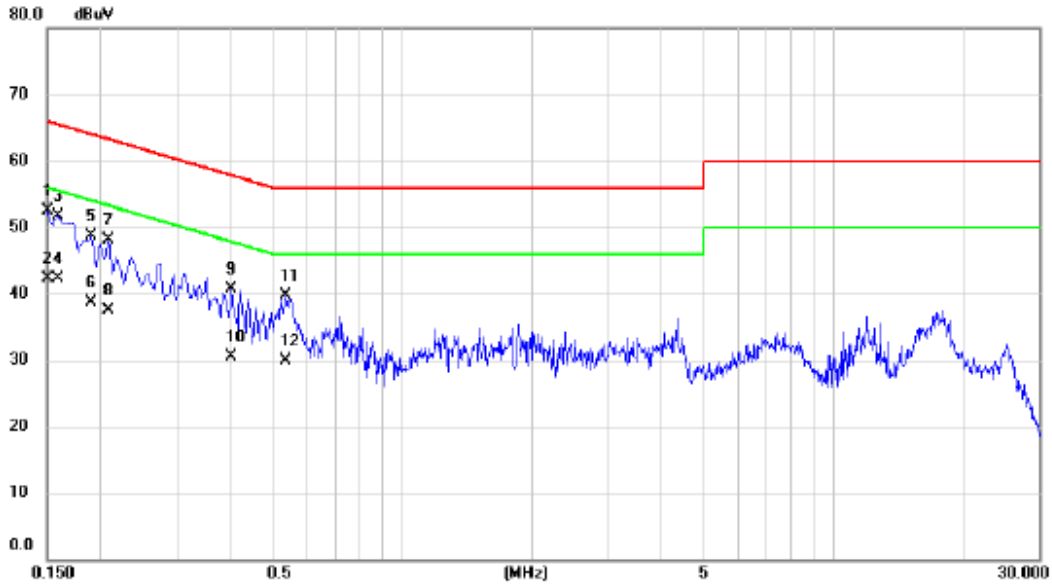


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	42.74	9.74	52.48	66.00	-13.52	QP	
2		0.1500	32.60	9.74	42.34	56.00	-13.66	AVG	
3		0.1598	41.88	9.81	51.69	65.47	-13.78	QP	
4	*	0.1598	32.50	9.81	42.31	55.47	-13.16	AVG	
5		0.1905	38.65	9.98	48.63	64.01	-15.38	QP	
6		0.1905	28.70	9.98	38.68	54.01	-15.33	AVG	
7		0.2085	38.01	10.00	48.01	63.26	-15.25	QP	
8		0.2085	27.60	10.00	37.60	53.26	-15.66	AVG	
9		0.4020	30.67	10.07	40.74	57.81	-17.07	QP	
10		0.4020	20.40	10.07	30.47	47.81	-17.34	AVG	
11		0.5370	29.56	10.13	39.69	56.00	-16.31	QP	
12		0.5370	19.80	10.13	29.93	46.00	-16.07	AVG	

Test Voltage	AC 110V/60Hz	Phase	Line
Test Mode	Mode 3		

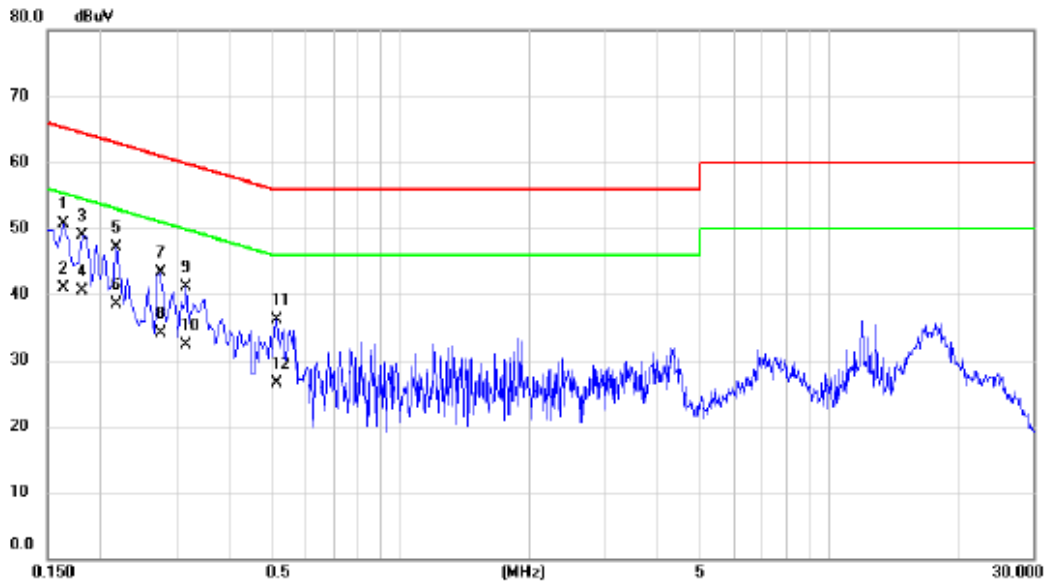

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1635	40.87	9.77	50.64	65.28	-14.64	QP	
2		0.1635	31.20	9.77	40.97	55.28	-14.31	AVG	
3		0.1815	39.15	9.85	49.00	64.42	-15.42	QP	
4	*	0.1815	30.60	9.85	40.45	54.42	-13.97	AVG	
5		0.2175	37.12	9.90	47.02	62.91	-15.89	QP	
6		0.2175	28.70	9.90	38.60	52.91	-14.31	AVG	
7		0.2760	33.35	9.88	43.23	60.94	-17.71	QP	
8		0.2760	24.30	9.88	34.18	50.94	-16.76	AVG	
9		0.3165	31.20	9.88	41.08	59.80	-18.72	QP	
10		0.3165	22.50	9.88	32.38	49.80	-17.42	AVG	
11		0.5144	26.20	9.93	36.13	56.00	-19.87	QP	
12		0.5144	16.50	9.93	26.43	46.00	-19.57	AVG	

Test Voltage	AC 110V/60Hz	Phase	Neutral
Test Mode	Mode 3		

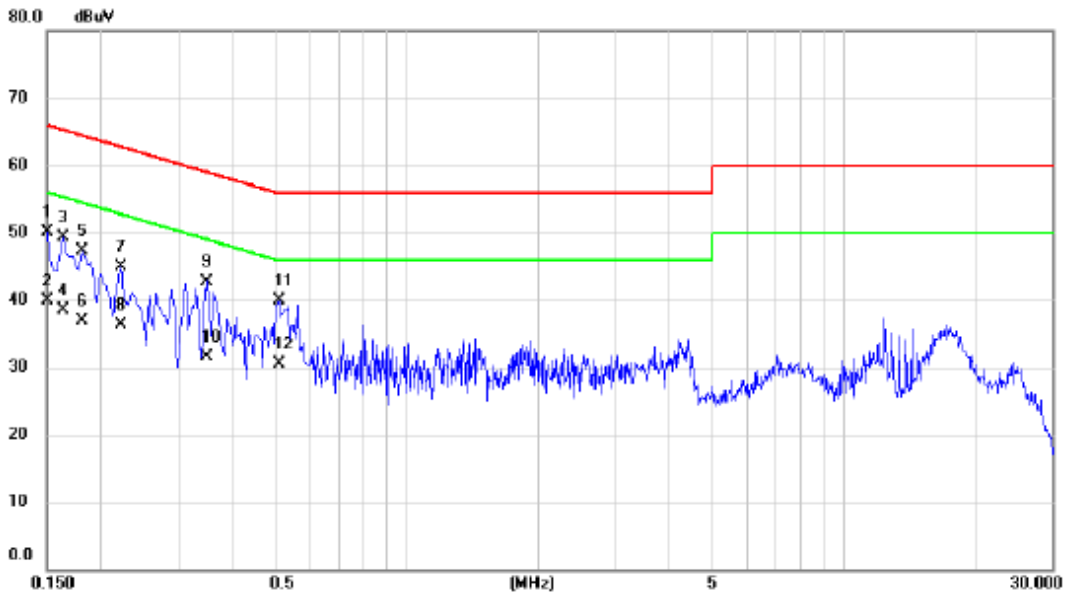

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	40.44	9.74	50.18	66.00	-15.82	QP	
2	0.1500	30.10	9.74	39.84	56.00	-16.16	AVG	
3	0.1635	39.49	9.85	49.34	65.28	-15.94	QP	
4	0.1635	28.70	9.85	38.55	55.28	-16.73	AVG	
5	0.1815	37.33	9.94	47.27	64.42	-17.15	QP	
6	0.1815	26.90	9.94	36.84	54.42	-17.58	AVG	
7	0.2220	34.99	9.99	44.98	62.74	-17.76	QP	
8	0.2220	26.30	9.99	36.29	52.74	-16.45	AVG	
9	0.3480	32.77	10.03	42.80	59.01	-16.21	QP	
10	0.3480	21.50	10.03	31.53	49.01	-17.48	AVG	
11	0.5100	29.71	10.12	39.83	56.00	-16.17	QP	
12 *	0.5100	20.40	10.12	30.52	46.00	-15.48	AVG	

### 3.4 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST

#### 3.4.1 LIMITS

Requirements for asymmetric mode conducted emissions from Class B equipment

Frequency Range MHz	Coupling device	Detector type / Bandwidth	Class B voltage limits dB(μV)	Class B current limits dB(μA)
0.15 - 0.5	AAN	Quasi Peak / 9 kHz	84 - 74	n/a
0.5 - 30			74	
0.15 - 0.5	AAN	Average / 9 kHz	74 - 64	
0.5 - 30			64	

**NOTE:**

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

#### 3.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	ISN	TESEQ	ISN T800	42838	Jul. 10, 2022

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

#### 3.4.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- AAN** at least 80 cm from nearest part of EUT chassis.



**NOTE:**


1. The communication function of EUT was executed and AAN was connected between EUT and associated equipment and the AAN was connected directly to reference ground plane.  
 Measure the voltage at the measurement port of the AAN  
 Correct the measured voltage by adding the AAN voltage division factor  
 Compare the corrected voltage with the limit.

**3.4.4 DEVIATION FROM TEST STANDARD**

No deviation


**3.4.5 TEST SETUP**

a) Cable Type: Balanced Unscreened, Screened or Coaxial

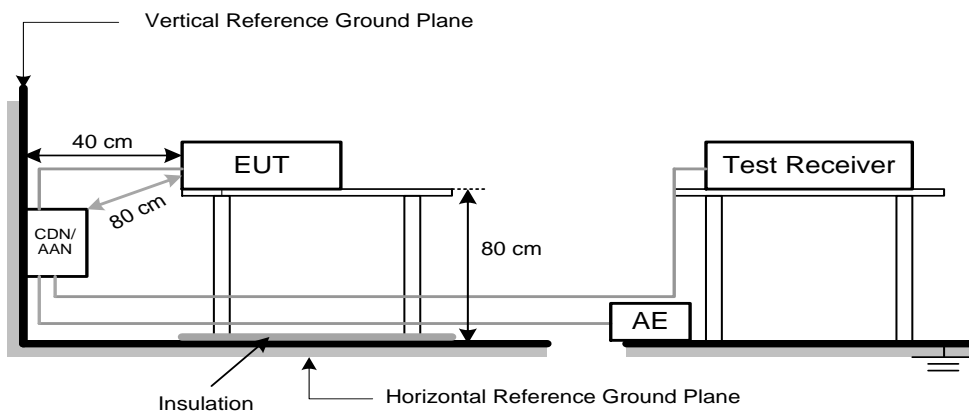


### 3.4.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 4

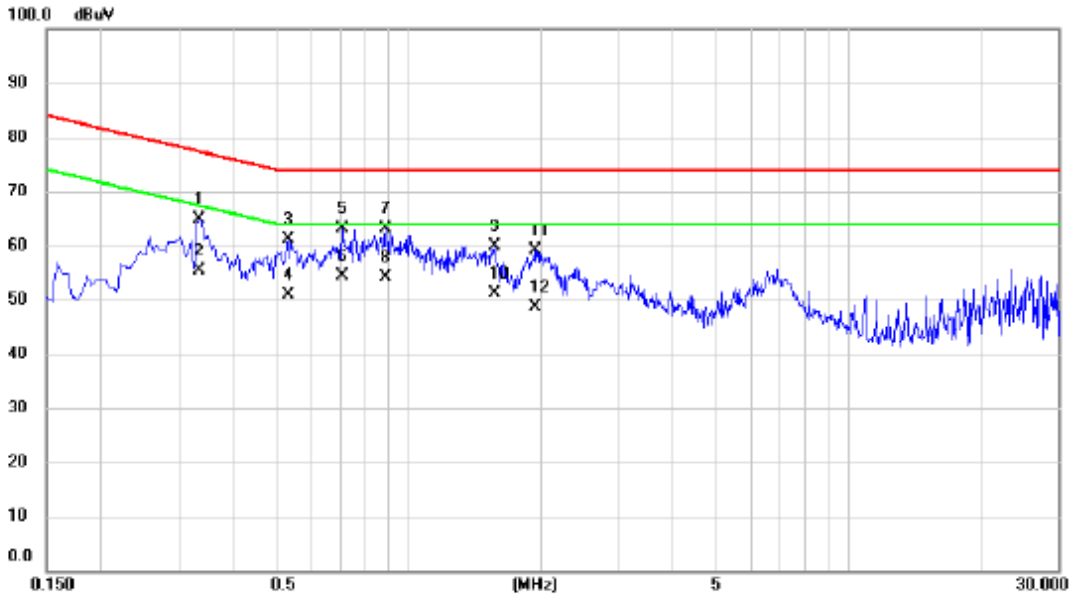


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3345	55.04	9.83	64.87	77.34	-12.47	QP	
2		0.3345	45.60	9.83	55.43	67.34	-11.91	AVG	
3		0.5325	51.40	9.75	61.15	74.00	-12.85	QP	
4		0.5325	41.20	9.75	50.95	64.00	-13.05	AVG	
5		0.7080	53.26	9.75	63.01	74.00	-10.99	QP	
6	*	0.7080	44.70	9.75	54.45	64.00	-9.55	AVG	
7		0.8880	53.33	9.73	63.06	74.00	-10.94	QP	
8		0.8880	44.50	9.73	54.23	64.00	-9.77	AVG	
9		1.5675	50.08	9.73	59.81	74.00	-14.19	QP	
10		1.5675	41.30	9.73	51.03	64.00	-12.97	AVG	
11		1.9365	49.40	9.74	59.14	74.00	-14.86	QP	
12		1.9365	38.90	9.74	48.64	64.00	-15.36	AVG	

Test Voltage	AC 230V/50Hz
Test Mode	Mode 5

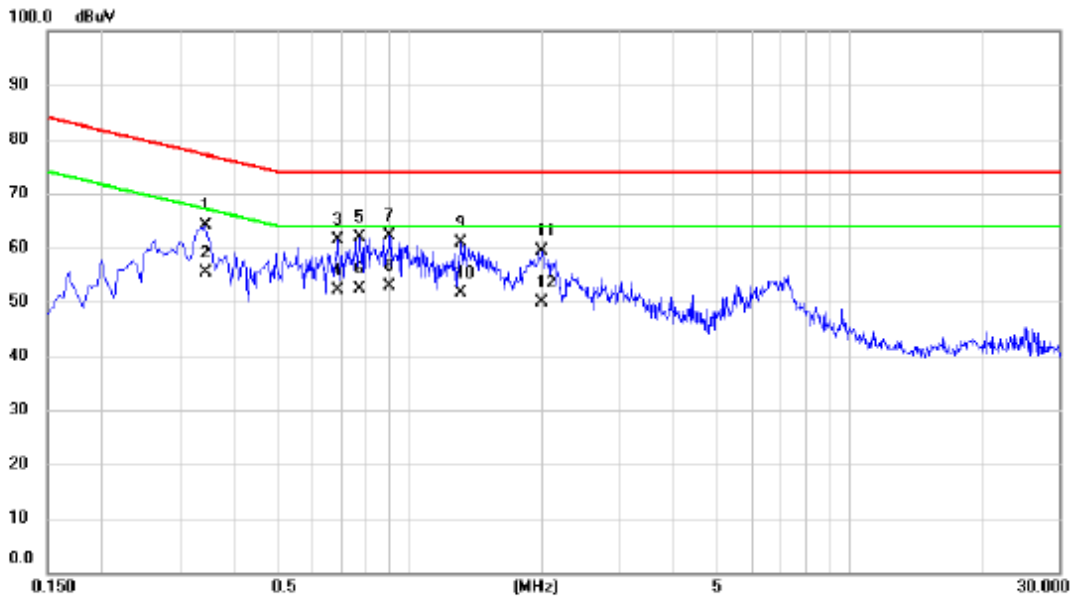


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.3435	54.36	9.83	64.19	77.12	-12.93	QP	
2	0.3435	45.60	9.83	55.43	67.12	-11.69	AVG	
3	0.6855	51.58	9.75	61.33	74.00	-12.67	QP	
4	0.6855	42.30	9.75	52.05	64.00	-11.95	AVG	
5	0.7710	52.03	9.75	61.78	74.00	-12.22	QP	
6	0.7710	42.70	9.75	52.45	64.00	-11.55	AVG	
7	0.9015	52.34	9.73	62.07	74.00	-11.93	QP	
8 *	0.9015	43.10	9.73	52.83	64.00	-11.17	AVG	
9	1.3065	51.13	9.73	60.86	74.00	-13.14	QP	
10	1.3065	41.90	9.73	51.63	64.00	-12.37	AVG	
11	2.0040	49.70	9.74	59.44	74.00	-14.56	QP	
12	2.0040	40.20	9.74	49.94	64.00	-14.06	AVG	

Test Voltage	AC 230V/50Hz
Test Mode	Mode 6

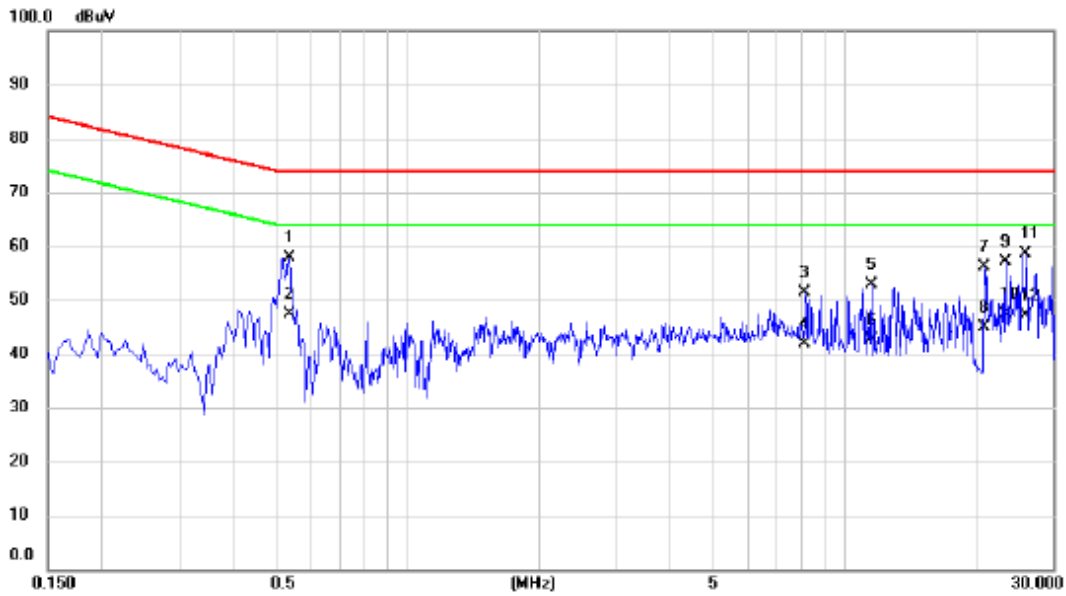


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5370	48.20	9.75	57.95	74.00	-16.05	QP	
2		0.5370	37.60	9.75	47.35	64.00	-16.65	AVG	
3		8.1195	41.46	9.94	51.40	74.00	-22.60	QP	
4		8.1195	31.90	9.94	41.84	64.00	-22.16	AVG	
5		11.5395	42.84	10.04	52.88	74.00	-21.12	QP	
6		11.5395	32.50	10.04	42.54	64.00	-21.46	AVG	
7		20.8095	45.65	10.36	56.01	74.00	-17.99	QP	
8		20.8095	34.60	10.36	44.96	64.00	-19.04	AVG	
9		23.3295	46.60	10.47	57.07	74.00	-16.93	QP	
10		23.3295	36.80	10.47	47.27	64.00	-16.73	AVG	
11	*	26.0160	47.93	10.59	58.52	74.00	-15.48	QP	
12		26.0160	36.50	10.59	47.09	64.00	-16.91	AVG	

Test Voltage	AC 230V/50Hz
Test Mode	Mode 7

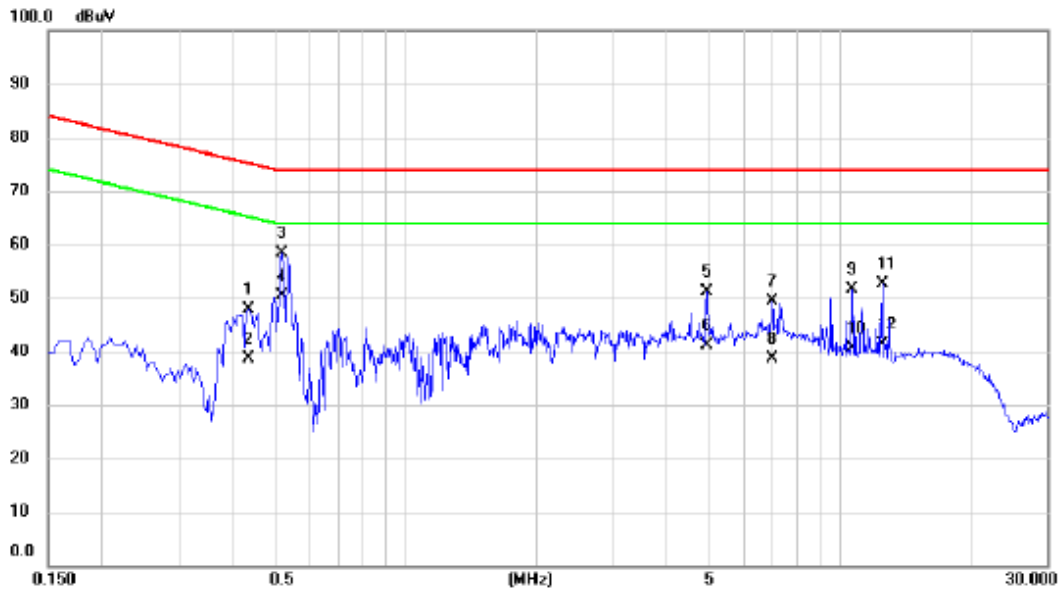


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4335	38.03	9.79	47.82	75.19	-27.37	QP	
2		0.4335	28.90	9.79	38.69	65.19	-26.50	AVG	
3		0.5190	48.57	9.76	58.33	74.00	-15.67	QP	
4	*	0.5190	40.60	9.76	50.36	64.00	-13.64	AVG	
5		4.9515	41.32	9.83	51.15	74.00	-22.85	QP	
6		4.9515	31.20	9.83	41.03	64.00	-22.97	AVG	
7		6.9675	39.40	9.90	49.30	74.00	-24.70	QP	
8		6.9675	28.70	9.90	38.60	64.00	-25.40	AVG	
9		10.6260	41.52	10.01	51.53	74.00	-22.47	QP	
10		10.6260	30.50	10.01	40.51	64.00	-23.49	AVG	
11		12.5070	42.48	10.07	52.55	74.00	-21.45	QP	
12		12.5070	31.30	10.07	41.37	64.00	-22.63	AVG	

Test Voltage	DC 48V
Test Mode	Mode 4

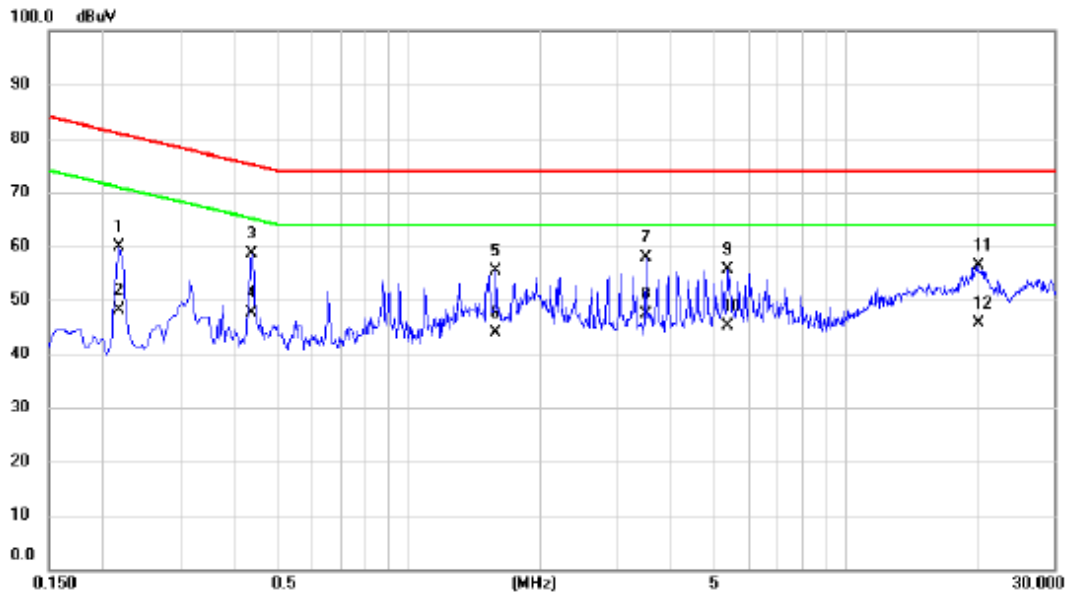


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2175	49.80	10.02	59.82	80.91	-21.09	QP	
2		0.2175	38.20	10.02	48.22	70.91	-22.69	AVG	
3		0.4380	48.77	9.78	58.55	75.10	-16.55	QP	
4		0.4380	37.90	9.78	47.68	65.10	-17.42	AVG	
5		1.5855	45.55	9.74	55.29	74.00	-18.71	QP	
6		1.5855	34.10	9.74	43.84	64.00	-20.16	AVG	
7	*	3.4890	48.15	9.80	57.95	74.00	-16.05	QP	
8		3.4890	37.60	9.80	47.40	64.00	-16.60	AVG	
9		5.3880	45.85	9.84	55.69	74.00	-18.31	QP	
10		5.3880	35.20	9.84	45.04	64.00	-18.96	AVG	
11		20.0625	46.10	10.33	56.43	74.00	-17.57	QP	
12		20.0625	35.20	10.33	45.53	64.00	-18.47	AVG	

Test Voltage	DC 48V
Test Mode	Mode 5

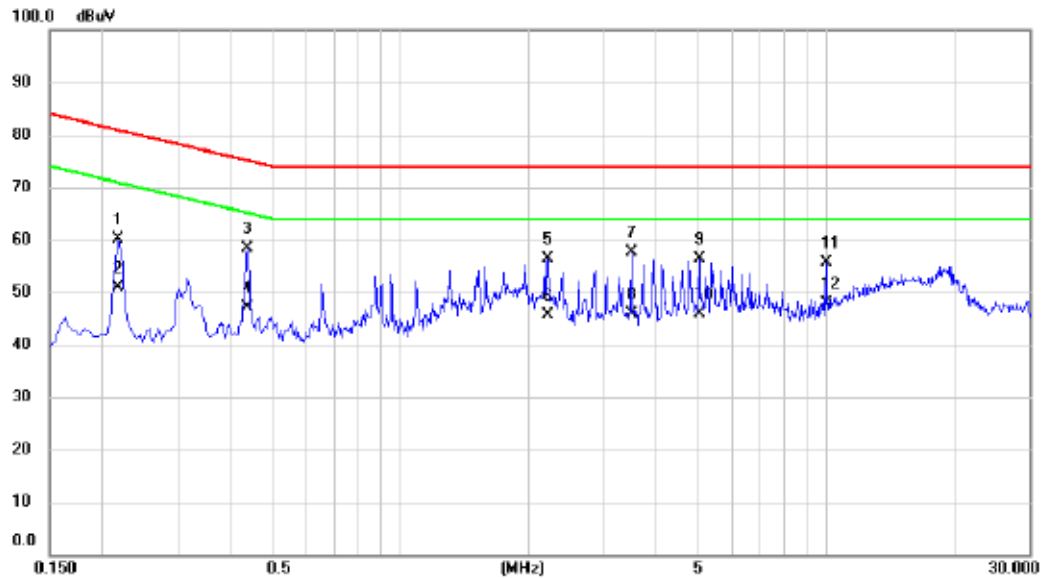

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2175	50.15	10.02	60.17	80.91	-20.74	QP	
2	0.2175	40.90	10.02	50.92	70.91	-19.99	AVG	
3	0.4380	48.63	9.78	58.41	75.10	-16.69	QP	
4	0.4380	37.40	9.78	47.18	65.10	-17.92	AVG	
5	2.2200	46.73	9.76	56.49	74.00	-17.51	QP	
6	2.2200	35.80	9.76	45.56	64.00	-18.44	AVG	
7	3.4890	47.76	9.80	57.56	74.00	-16.44	QP	
8	3.4890	36.20	9.80	46.00	64.00	-18.00	AVG	
9	5.0235	46.55	9.83	56.38	74.00	-17.62	QP	
10	5.0235	36.10	9.83	45.93	64.00	-18.07	AVG	
11	10.0140	45.63	9.99	55.62	74.00	-18.38	QP	
12 *	10.0140	37.90	9.99	47.89	64.00	-16.11	AVG	


Test Voltage	DC 48V
Test Mode	Mode 6

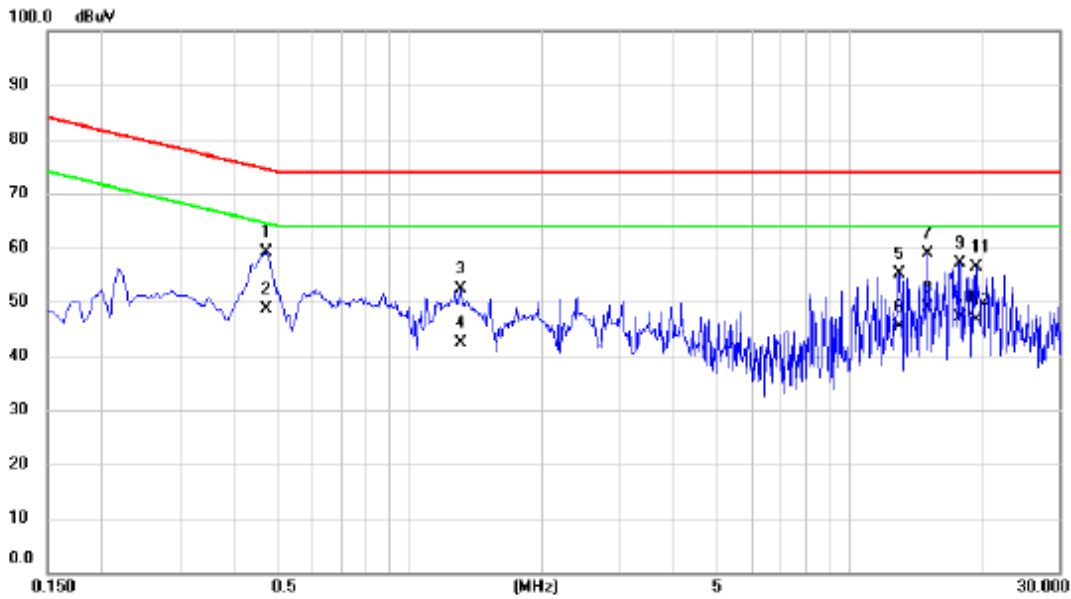

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4740	49.35	9.77	59.12	74.44	-15.32	QP	
2	0.4740	38.90	9.77	48.67	64.44	-15.77	AVG	
3	1.3110	42.62	9.73	52.35	74.00	-21.65	QP	
4	1.3110	32.60	9.73	42.33	64.00	-21.67	AVG	
5	12.9480	44.95	10.08	55.03	74.00	-18.97	QP	
6	12.9480	35.40	10.08	45.48	64.00	-18.52	AVG	
7 *	15.0225	48.82	10.14	58.96	74.00	-15.04	QP	
8	15.0225	38.70	10.14	48.84	64.00	-15.16	AVG	
9	17.8935	46.81	10.25	57.06	74.00	-16.94	QP	
10	17.8935	36.90	10.25	47.15	64.00	-16.85	AVG	
11	19.3604	45.99	10.31	56.30	74.00	-17.70	QP	
12	19.3604	36.20	10.31	46.51	64.00	-17.49	AVG	



Test Voltage	DC 48V
Test Mode	Mode 7

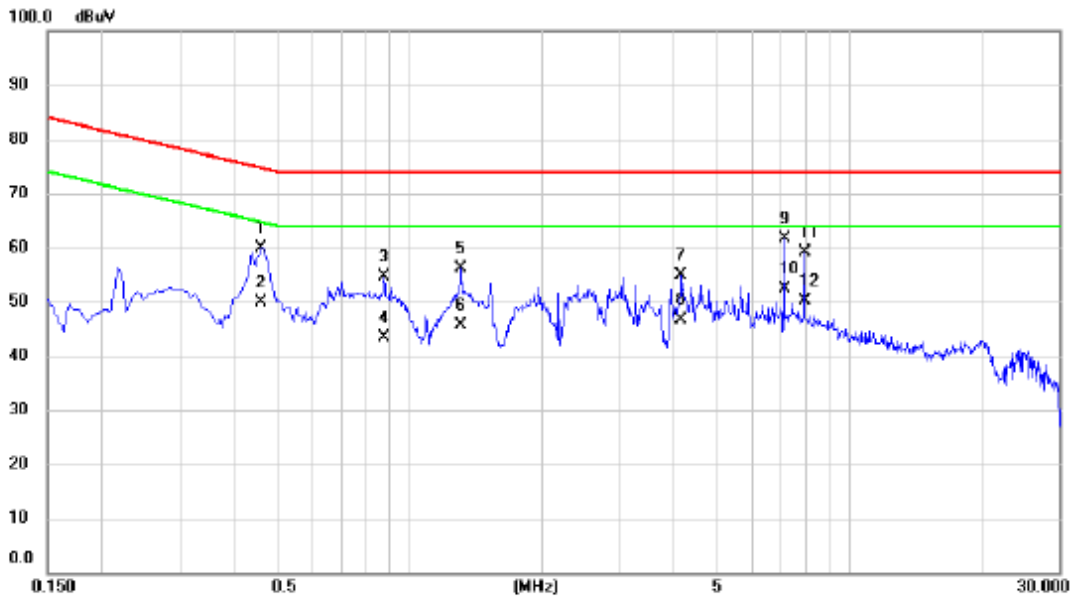

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4605	50.17	9.78	59.95	74.68	-14.73	QP	
2		0.4605	40.10	9.78	49.88	64.68	-14.80	AVG	
3		0.8745	44.91	9.73	54.64	74.00	-19.36	QP	
4		0.8745	33.60	9.73	43.33	64.00	-20.67	AVG	
5		1.3110	46.40	9.73	56.13	74.00	-17.87	QP	
6		1.3110	35.80	9.73	45.53	64.00	-18.47	AVG	
7		4.1460	45.17	9.81	54.98	74.00	-19.02	QP	
8		4.1460	36.70	9.81	46.51	64.00	-17.49	AVG	
9		7.1115	51.63	9.90	61.53	74.00	-12.47	QP	
10	*	7.1115	42.50	9.90	52.40	64.00	-11.60	AVG	
11		7.8990	49.11	9.94	59.05	74.00	-14.95	QP	
12		7.8990	40.10	9.94	50.04	64.00	-13.96	AVG	

### 3.5 HARMONIC CURRENT EMISSIONS TEST

#### 3.5.1 LIMITS

The power consumption is less than 75W, there is no limit applied.

#### 3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 10, 2022
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 10, 2022
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.5.3 TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- The classification of EUT is according to of EN IEC 61000-3-2. The EUT is classified as Class A.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### 3.5.4 DEVIATION FROM TEST STANDARD

No deviation


#### 3.5.5 TEST SETUP

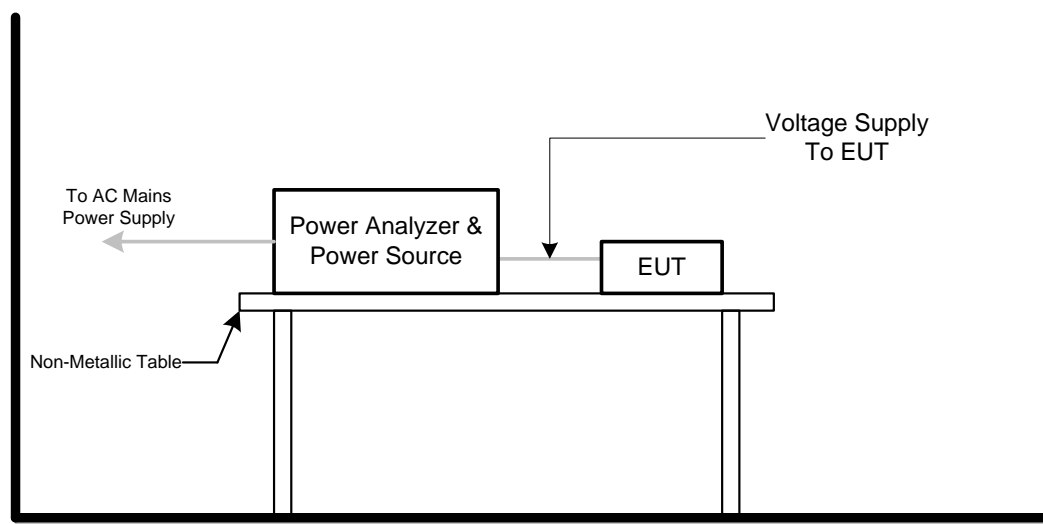


### 3.5.6 TEST RESULTS

Harmonics – Class-A	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 3

Current & voltage waveforms

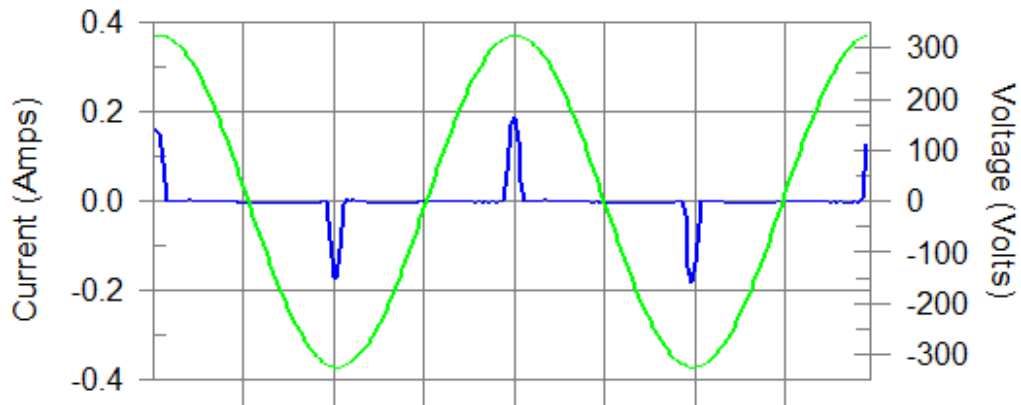

Harmonics and Class A limit line      European Limits

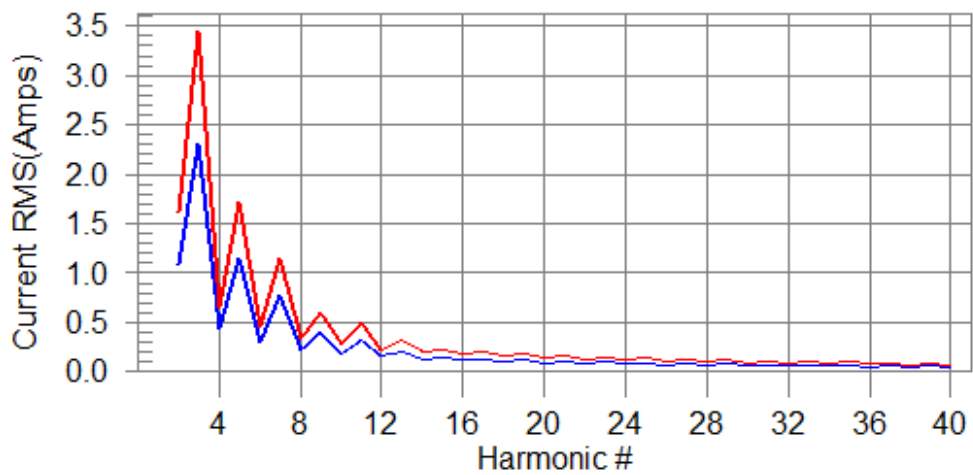

**Test result: Pass**    **Worst harmonics H17-3.5% of 150% limit, H17-5% of 100% limit**

## Current Test Result Summary (Run time)

Test Voltage	AC 230V/50Hz
Test Mode	Mode 3

## Highest parameter values during test:

V_RMS (Volts):	229.87	Frequency(Hz):	50.00
I_Peak (Amps):	0.193	I_RMS (Amps):	0.033
I_Fund (Amps):	0.012	Crest Factor:	5.850
Power (Watts):	2.8	Power Factor:	0.393

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.001	1.620	N/A	Pass
3	0.011	2.300	0.5	0.012	3.450	0.3	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.010	1.140	0.9	0.011	1.710	0.7	Pass
6	0.001	0.300	N/A	0.001	0.450	N/A	Pass
7	0.010	0.770	1.3	0.011	1.155	0.9	Pass
8	0.000	0.230	N/A	0.000	0.345	N/A	Pass
9	0.009	0.400	2.4	0.010	0.600	1.7	Pass
10	0.000	0.184	N/A	0.000	0.276	N/A	Pass
11	0.009	0.330	2.7	0.010	0.495	1.9	Pass
12	0.000	0.153	N/A	0.000	0.230	N/A	Pass
13	0.008	0.210	3.9	0.009	0.315	2.8	Pass
14	0.000	0.131	N/A	0.000	0.197	N/A	Pass
15	0.007	0.150	5.0	0.008	0.225	3.5	Pass
16	0.000	0.115	N/A	0.000	0.173	N/A	Pass
17	0.007	0.132	5.0	0.007	0.198	3.5	Pass
18	0.000	0.102	N/A	0.000	0.153	N/A	Pass
19	0.006	0.118	4.9	0.006	0.178	3.4	Pass
20	0.000	0.092	N/A	0.000	0.138	N/A	Pass
21	0.005	0.107	N/A	0.005	0.161	N/A	Pass
22	0.000	0.084	N/A	0.000	0.125	N/A	Pass
23	0.004	0.098	N/A	0.004	0.147	N/A	Pass
24	0.000	0.077	N/A	0.000	0.115	N/A	Pass
25	0.003	0.090	N/A	0.003	0.135	N/A	Pass
26	0.000	0.071	N/A	0.000	0.107	N/A	Pass
27	0.003	0.083	N/A	0.003	0.125	N/A	Pass
28	0.000	0.066	N/A	0.000	0.099	N/A	Pass
29	0.002	0.078	N/A	0.002	0.116	N/A	Pass
30	0.000	0.061	N/A	0.000	0.092	N/A	Pass
31	0.001	0.073	N/A	0.001	0.109	N/A	Pass
32	0.000	0.058	N/A	0.000	0.086	N/A	Pass
33	0.001	0.068	N/A	0.001	0.102	N/A	Pass
34	0.000	0.054	N/A	0.000	0.081	N/A	Pass
35	0.001	0.064	N/A	0.001	0.096	N/A	Pass
36	0.000	0.051	N/A	0.000	0.077	N/A	Pass
37	0.000	0.061	N/A	0.001	0.091	N/A	Pass
38	0.000	0.048	N/A	0.000	0.073	N/A	Pass
39	0.001	0.058	N/A	0.001	0.087	N/A	Pass
40	0.000	0.046	N/A	0.000	0.069	N/A	Pass

Voltage Source Verification Data (Run time)	
Test Voltage	AC 230V/50Hz
Test Mode	Mode 3

**Highest parameter values during test:**

Voltage (Vrms):	229.87	Frequency(Hz):	50.00
I_Peak (Amps):	0.193	I_RMS (Amps):	0.033
I_Fund (Amps):	0.012	Crest Factor:	5.850
Power (Watts):	2.8	Power Factor:	0.393

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.135	0.460	29.30	OK
3	0.513	2.068	24.79	OK
4	0.060	0.460	13.15	OK
5	0.057	0.919	6.25	OK
6	0.034	0.460	7.37	OK
7	0.038	0.689	5.48	OK
8	0.021	0.460	4.64	OK
9	0.038	0.460	8.18	OK
10	0.025	0.460	5.40	OK
11	0.021	0.230	9.13	OK
12	0.016	0.230	7.07	OK
13	0.020	0.230	8.60	OK
14	0.014	0.230	6.28	OK
15	0.013	0.230	5.71	OK
16	0.016	0.230	6.78	OK
17	0.009	0.230	4.05	OK
18	0.012	0.230	5.19	OK
19	0.012	0.230	5.06	OK
20	0.018	0.230	7.62	OK
21	0.013	0.230	5.53	OK
22	0.011	0.230	4.72	OK
23	0.011	0.230	4.67	OK
24	0.005	0.230	2.21	OK
25	0.007	0.230	3.13	OK
26	0.008	0.230	3.52	OK
27	0.007	0.230	3.26	OK
28	0.008	0.230	3.31	OK
29	0.005	0.230	2.07	OK
30	0.005	0.230	2.23	OK
31	0.004	0.230	1.80	OK
32	0.005	0.230	2.26	OK
33	0.007	0.230	2.89	OK
34	0.003	0.230	1.11	OK
35	0.005	0.230	2.32	OK
36	0.003	0.230	1.37	OK
37	0.005	0.230	2.35	OK
38	0.003	0.230	1.21	OK
39	0.004	0.230	1.72	OK
40	0.007	0.230	2.96	OK

### 3.6 VOLTAGE FLUCTUATIONS (FLICKER) TEST

#### 3.6.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	$\leq 1.0$ , $T_p= 10$ min.	Short Term Flicker Indicator
Plt	$\leq 0.65$ , $T_p=2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Change
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	$\leq 500$ ms	Relative V-change characteristic

#### 3.6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 10, 2022
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 10, 2022
3	Measurement Software	California	CTS4.0 Version 4.29	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


#### 3.6.3 TEST PROCEDURE

- a. Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

#### 3.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.6.5 TEST SETUP

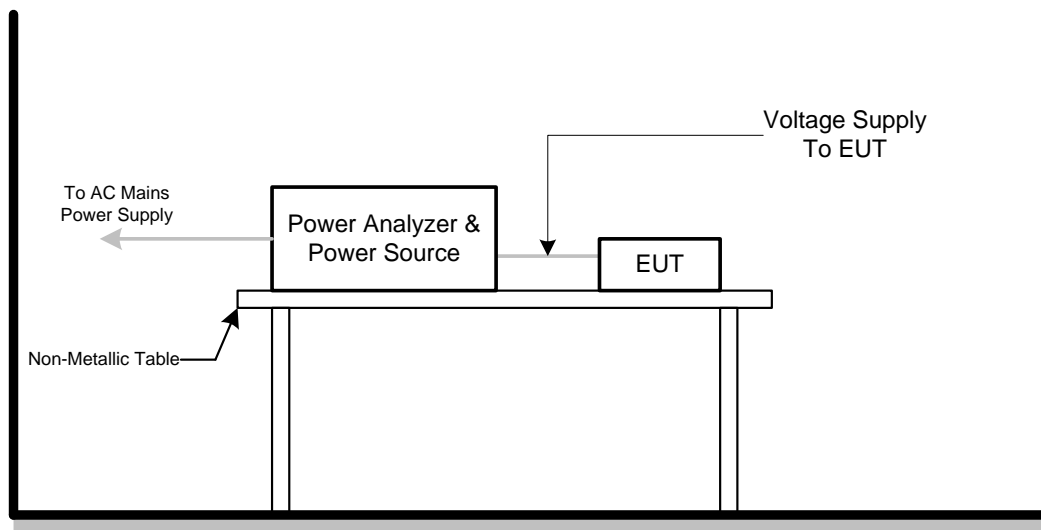


### 3.6.6 TEST RESULTS


Test Voltage	AC 230V/50Hz
Test Mode	Mode 3

Pst<sub>t</sub> and limit line

European Limits

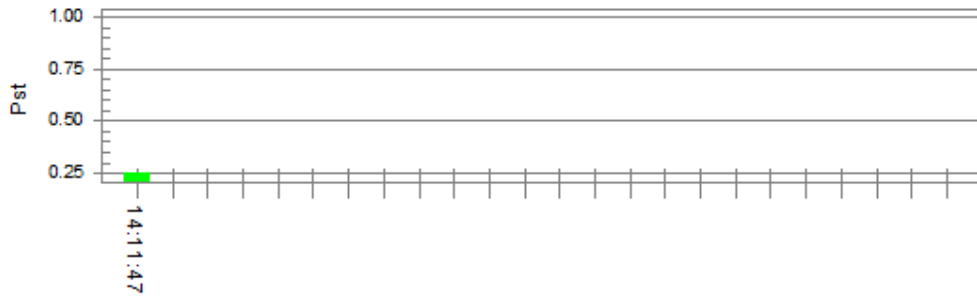

Plt and limit line

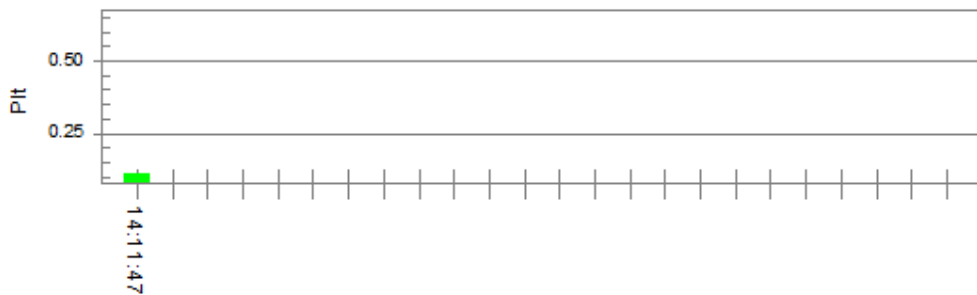

**Parameter values recorded during the test:**

Vrms at the end of test (Volt): 229.82

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.248

Highest Plt (2 hr. period): 0.108

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass



## 4. EMC IMMUNITY TEST

### 4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge IEC 61000-4-2 (ESD)	±8kV air discharge ±4kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Continuous RF electromagnetic field disturbances,swept test IEC 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Continuous RF electromagnetic field disturbances,spot test IEC 61000-4-3 (RS)	1800 MHz, 2600MHz, 3500 MHz, 5000MHz(±1 %) 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity IEC 61000-4-4 (EFT)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL port)	Analogue/digital data ports <b>(NOTE 2)</b>	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC network power ports <b>(NOTE 2)</b>	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC mains power ports	B

Surge immunity IEC 61000-4-5 (Surge)	<b>Port Type: unshielded symmetrical</b>		
	<b>Apply: lines to ground</b>		
	<b>Primary protection is Intended</b> ±1 kV and ±4 kV 10/700(5/320)Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	C
	<b>Primary protection is not Intended</b> ±1 kV 10/700(5/320) Tr/Th µs		C
	<b>Port type: coaxial or shielded</b>		
	<b>Apply: shield to ground</b>		
±0.5 kV 1.2/50(8/20) Tr/Th µs	Analogue/digital data ports <b>(NOTE 1) &amp; (NOTE 2)</b>	B	
<b>line to reference ground for each individual line:</b> ±0.5 kV(peak) 1.2/50(8/20) Tr/Th µs	DC network power ports <b>(NOTE 2)</b>	B	
±1 kV(peak) 1.2/50(8/20) Tr/Th µs (line to line) ±2 kV(peak) 1.2/50(8/20) Tr/Th µs (line to earth or ground)	AC mains power ports	B	
Continuous induced RF disturbances IEC 61000-4-6 (CS)	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Analogue/digital data ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC network power ports <b>(NOTE 2)</b>	A
	0.15 MHz to 10 MHz 3V(unmodulated, r.m.s), 10 MHz to 30 MHz 3V to 1V(unmodulated, r.m.s), 30 MHz to 80 MHz 1V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC mains power ports	A

Power frequency magnetic field immunity IEC 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s)	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity IEC 61000-4-11 (Dips)	Voltage dips: Residual voltage < 5% 0.5 cycle Residual voltage < 70% 25 cycle(50Hz), 30 cycle (60Hz) Voltage interruptions: Residual voltage < 5% 250 cycle (50Hz), 300 cycle (60Hz)	AC Power Ports	B C C
Broadband impulse noise disturbances, repetitive (BIN-R)	0.15MHz to 0.5 MHz 107dBuV 0.5 MHz to 10 MHz 107dBuV to 36dBuV 10 MHz to 30 MHz 36dBuV to 30 dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	A
	0.70 ms 8.3 ms(for 60Hz) 10 ms(for 50Hz)	Analogue/digital data ports <b>(Apply period based on the AC mains frequency)</b>	A
Broadband impulse noise disturbances, isolated (BIN-I)	0.15MHz to 30 MHz 110dBuV	Analogue/digital data ports <b>(Applicable only to CPE xDSL ports)</b>	B
	0.24 ms 10 ms 300 ms	Analogue/digital data ports <b>(Apply all burst durations)</b>	B

**Note.**

- 1) Applicable only to ports which, according to the manufacturer's specification, may connect directly to outdoor cables.
- 2) Applicable only to ports which, according to the manufacturer's specification, support cable lengths greater than 3 m.

## 4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standards, the general performance criteria as following:

<b>Criterion A</b>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion B</b>	<p>During the application of the disturbance, degradation of performance is allowed. However, nonintended change of actual operating state or stored data is allowed to persist after the test.</p> <p>After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criterion C</b>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Areboot or re-start operation is allowed.</p> <p>Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

### 4.3 ANNEX G (NORMATIVE) - AUDIO OUTPUT FUNCTION

#### 4.3.1 PERFORMANCE CRITERIA

##### Performance criterion A:

For devices that support telephony functions the limits of Table G.3 shall apply.

With respect to Table G.3:

- the interference ratio (electrical or acoustic) shall meet the limits in column 3; or,
- the acoustic level of the demodulated audio shall be less than the limits in column 4; or,
- the digitally coded level of demodulated audio shall be less than limits in column 5; or,
- the analogue level of the demodulated audio shall be less than the limits in column 6.

**Table G.3 – Performance criterion A – Limits for devices supporting telephony**

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB (SPL)	Digital dBm0	Analogue dBm
Conducted	0,15 to 30	-20 dB	55	-50	-50
	30 to 80	-10 dB	65	-40	-40
Radiated	80 to 1000	0 dB	75	-30	-30

For terminals connected to digital wired network ports (such as Ethernet, ISDN), measurements of the demodulated 1 kHz may be performed on a remote AE, ideally of the same design.

For all other devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

##### Performance criterion B:

Use the general performance criterion B. See GENERAL PERFORMANCE CRITERIA.

##### Performance criterion C:

Use the general performance criterion C. See GENERAL PERFORMANCE CRITERIA.

## 4.4 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 4.4.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$
Polarity	Positive & Negative
Number of Discharge	20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second

### 4.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Dec. 01, 2022

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. The test shall be performed with single discharges. On each pre-selected point at least 10 single discharges (in the most sensitive polarity) shall be applied.

NOTE 1 The minimum number of discharges applied is depending on the EUT; for products with synchronized circuits the number of discharges should be larger.

For the time interval between successive single discharges an initial value of 1 s is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.

NOTE 2 The points to which the discharges should be applied may be selected by means of an exploration carried out at a repetition rate of 20 discharges per second, or more.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- b. For TABLE-TOP equipment:

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in IEC 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.4.5 TEST SETUP

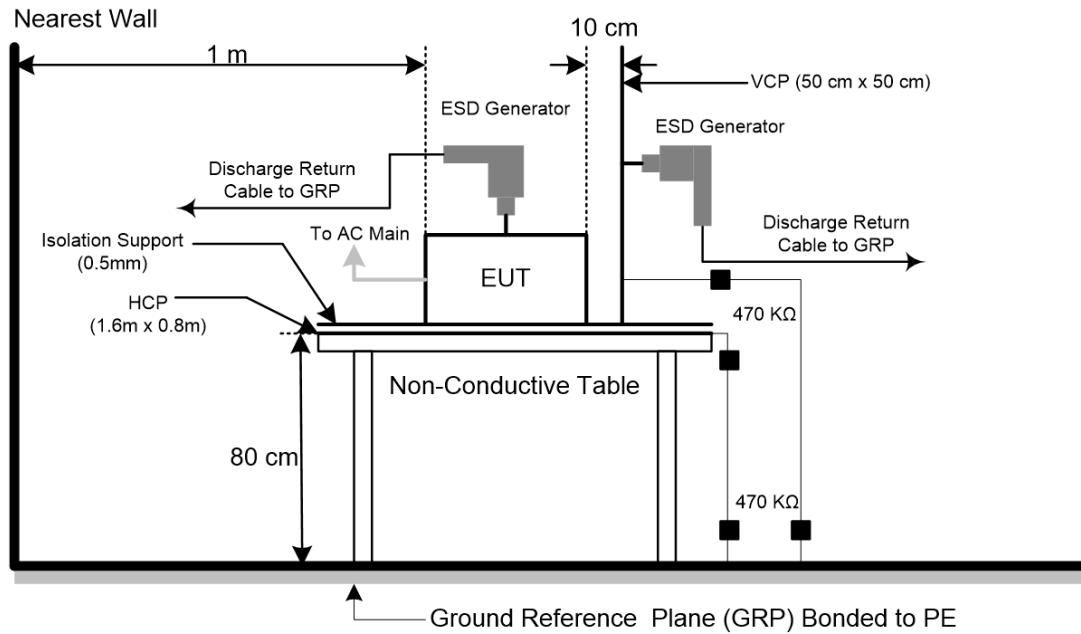

#### 4.4.6 TEST RESULTS

Test Voltage	AC 230V/50Hz, DC 48V
Test Mode	Mode 1-Mode 3

Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	A	A	-	-	B	B	-	-	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	A	A	-	-	-	-	-	-	-	-
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-
5	A	A	A	A	A	A	-	-	-	-	-	-	-	-
6	A	A	A	A	B	B	-	-	-	-	-	-	-	-
7	A	A	A	A	A	A	-	-	-	-	-	-	-	-
8	A	A	A	A	A	A	-	-	-	-	-	-	-	-
9	A	A	A	A	B	B	-	-	-	-	-	-	-	-
10	A	A	A	A	A	A	-	-	-	-	-	-	-	-
11	A	A	A	A	A	A	-	-	-	-	-	-	-	-
12	A	A	A	A	A	A	-	-	-	-	-	-	-	-
13	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		B				-	


Mode	HCP Contact Discharge						VCP Contact Discharge					
	4kV		- kV		- kV		4kV		- kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
Left side	A	A	-	-	-	-	A	A	-	-	-	-
Right side	A	A	-	-	-	-	A	A	-	-	-	-
Front side	A	A	-	-	-	-	A	A	-	-	-	-
Rear side	A	A	-	-	-	-	A	A	-	-	-	-
Criteria	B				-		B				-	
Result	A				-		A				-	


Note:


- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report



PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

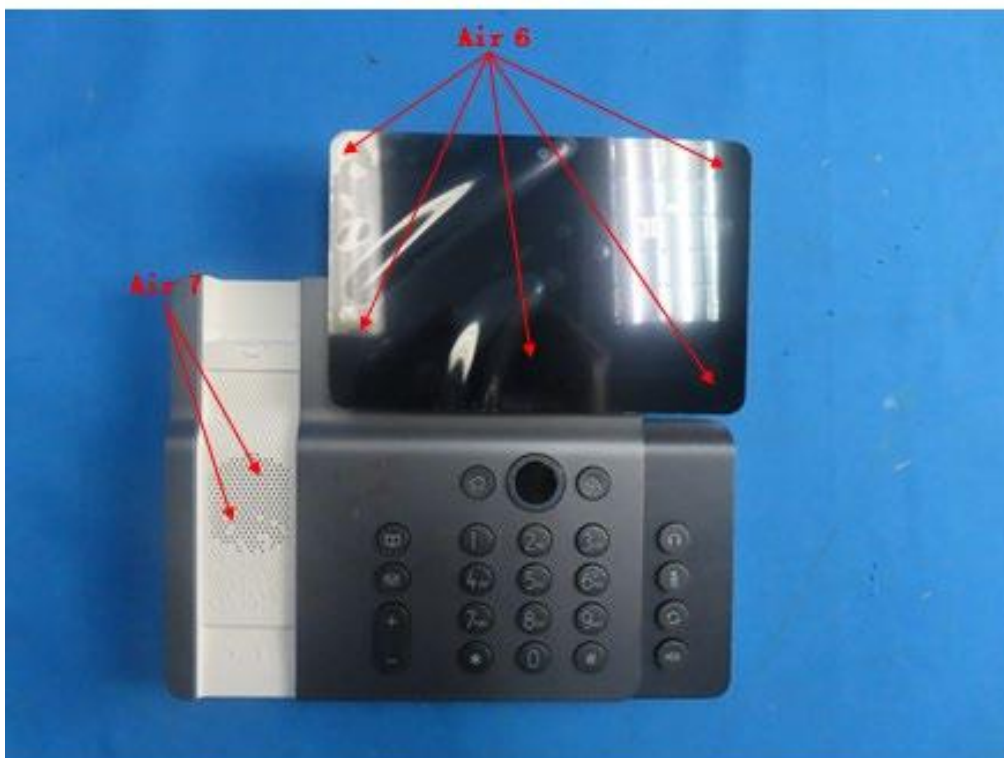

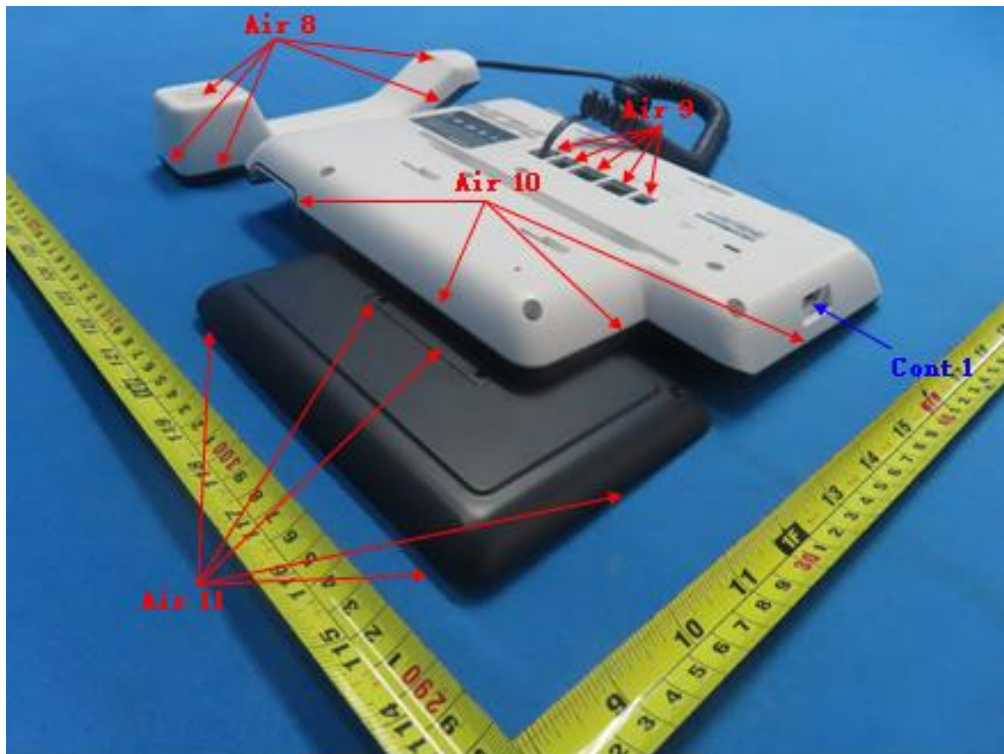

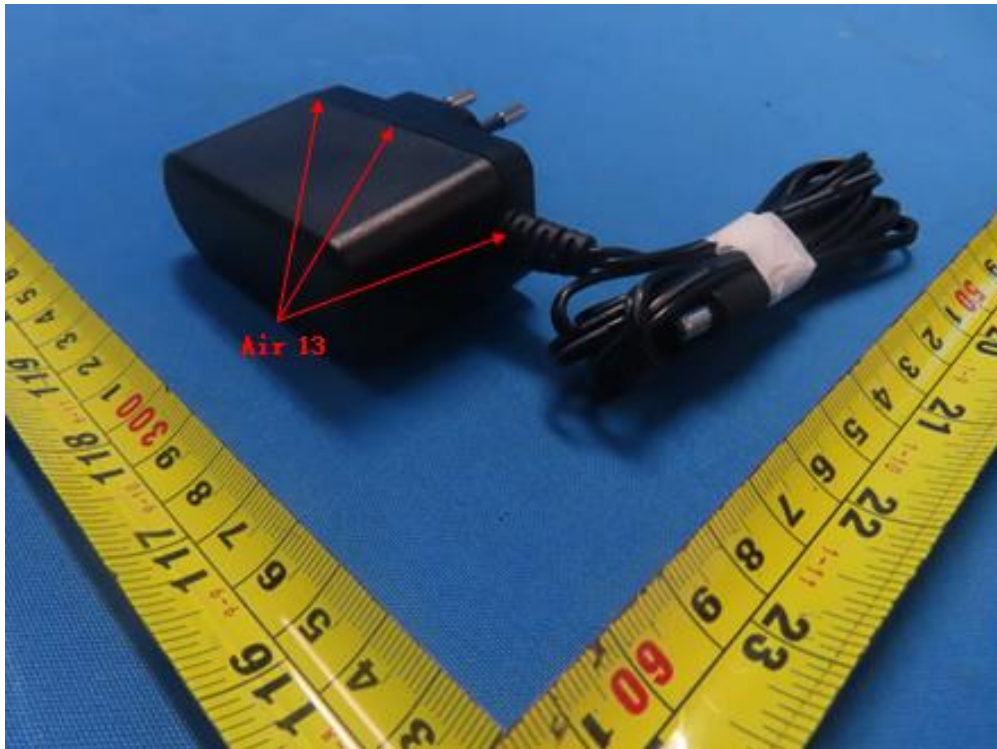

## 4.5 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

### 4.5.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000MHz ( $\pm 1\%$ )
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency.
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	3 seconds

### 4.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EMCO	3142C	66462	Mar. 26, 2022
2	Amplifier	AR	50S1G4A	326720	Feb. 28, 2022
3	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Jul. 10, 2022
4	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 10, 2022
5	Power amplifier	MILMEGA	AS1860-50	1064834	Feb. 28, 2022
6	Microwave Log.-Per. Antenna	Schwarzbeck	STLP 9149	9149-277	Apr. 14, 2022
7	Power amplifier	MILMEGA	80RF1000-250	1064833	Feb. 28, 2022
8	Measurement Software	Farad	(EZ-RS )V2.0.1.3	N/A	N/A
9	Free-field 1/2` Microphone	B&K	4190-L-001	2878077	Jun. 10, 2022
10	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.5.3 TEST PROCEDURE

The EUT and support equipment are in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

For TABLE-TOP equipment:

The EUT installed in a representative system as described in IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

- a. The field strength level was 3 V/m(unmodulated, r.m.s).
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. Where the frequency range is swept incrementally, the step size was 1% of the preceding frequency.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

For Acoustic measurements:


- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ . (BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
Acoustic interference ratio =  $L_1 - L_0$ .  
(For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).

#### 4.5.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.5.5 TEST SETUP


- a) For Continuous induced RF disturbances

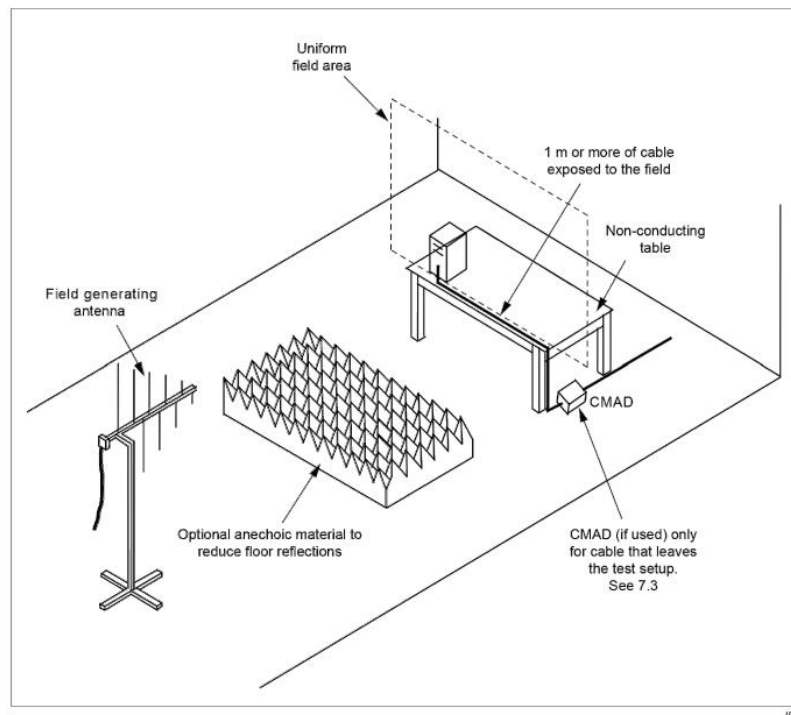

**For Audio output function**  
**(1) Loudspeaker**

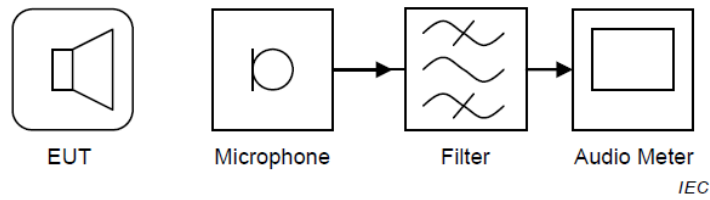


The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement

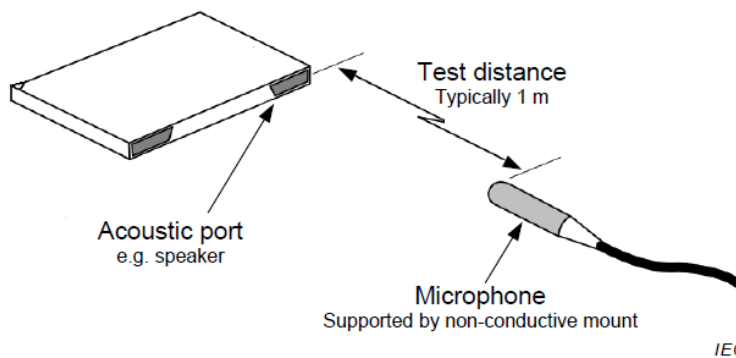

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

**(2) Telephone handset:**

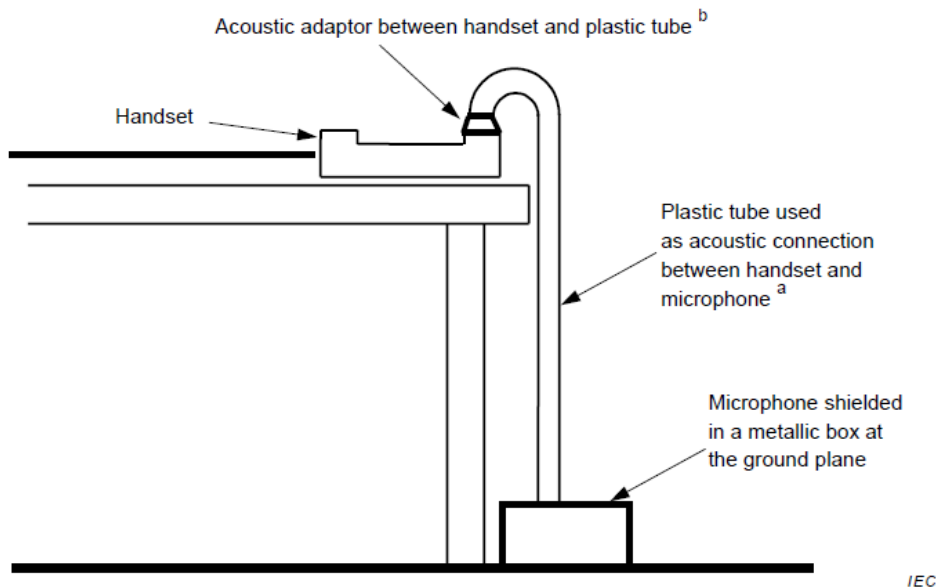

NOTE This set up is suitable for radiated immunity testing. See G.6.3.

<sup>a</sup> The acoustic measurement procedure compensates for the acoustic properties of the tube. Typically, the tube has an inner diameter of 15 mm, an outer diameter of 19 mm, and a total length of 1,5 m.

<sup>b</sup> Conically formed adaptor which is connected acoustically to the various forms of handsets with some type of soft rubber. This stable coupling of the handset to the acoustical tube should not be changed between establishing the reference level and measuring the demodulated levels.

#### 4.5.6 TEST RESULTS


Test Voltage	AC 230V/50Hz, DC 48V
Test Mode	Mode 1-Mode 3

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Modulation	Azimuth	Criterion	Result
80 - 1000	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		
1800, 2600, 3500, 5000 (±1%)	H / V	3V/m	AM Modulated 1000Hz, 80%	0	A	A
				90		
				180		
				270		

**For Audio output function**


(1) Loudspeaker:

Test Voltage	AC 230V/50Hz
Test Mode	Rear_Vertical

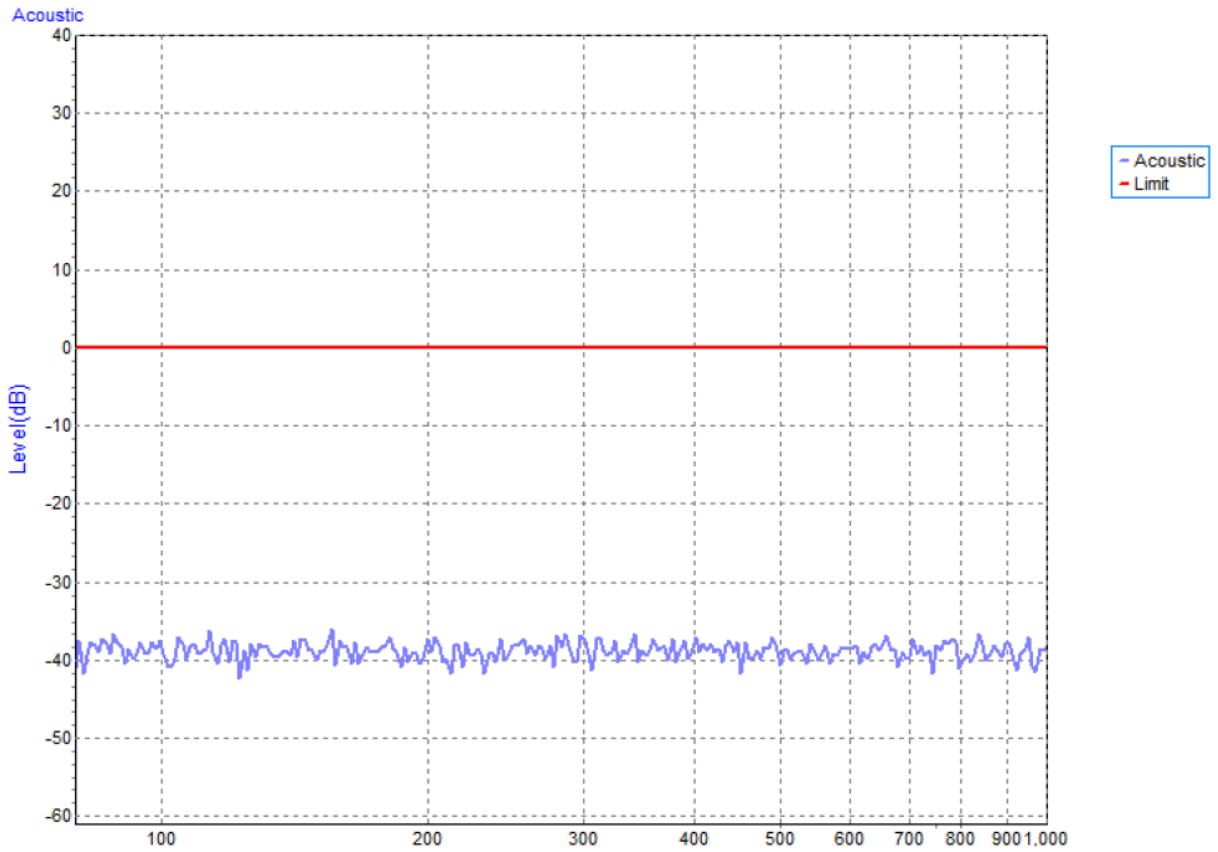





Test Voltage	AC 230V/50Hz
Test Mode	Rear_Horizontal

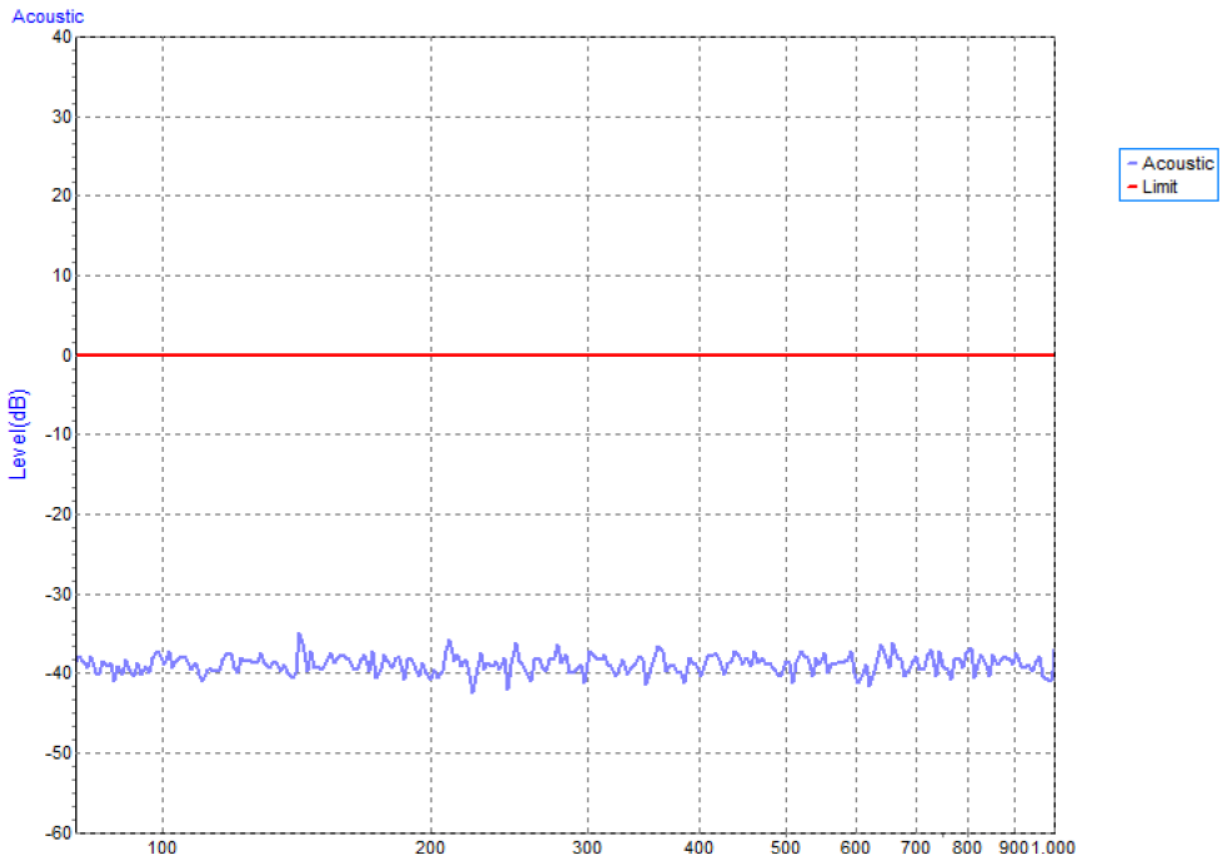

Test Voltage	DC 48V
Test Mode	Rear_Vertical

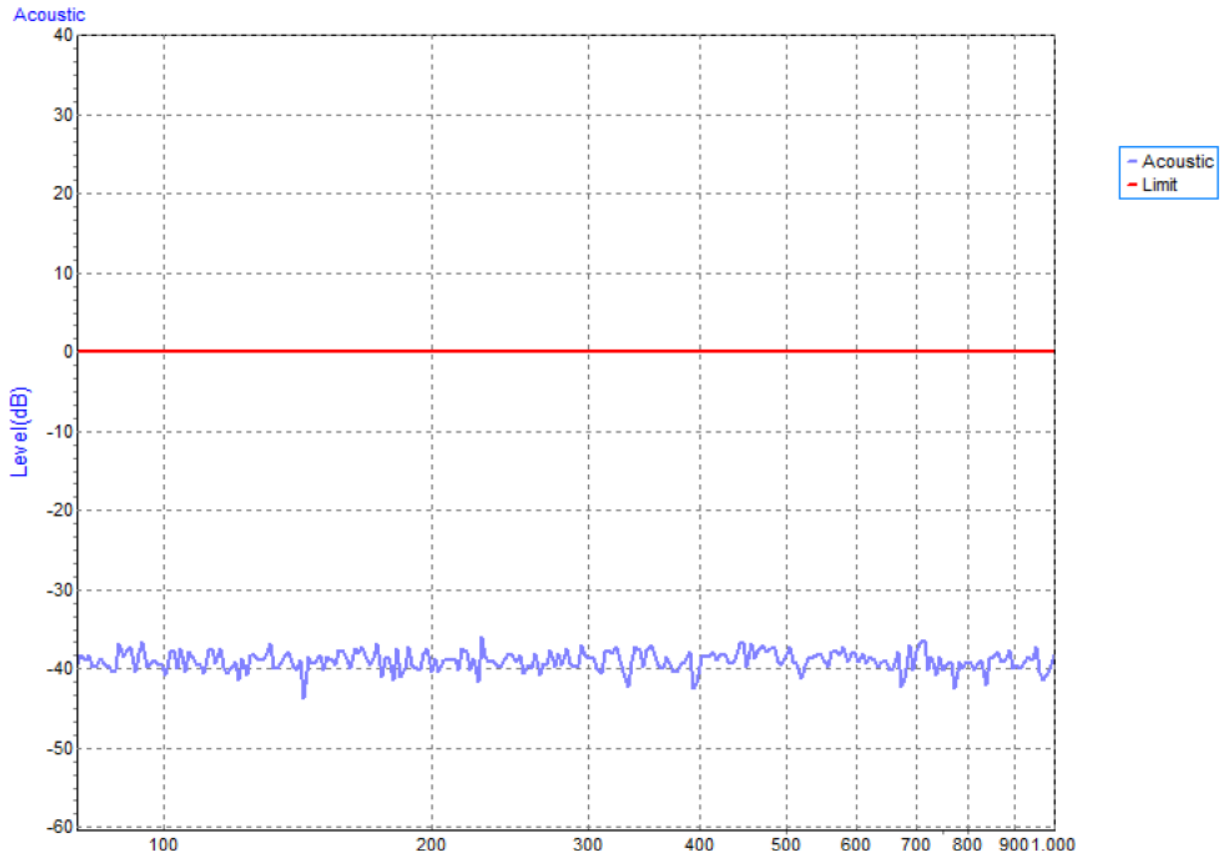


Test Voltage	DC 48V
Test Mode	Rear_Horizontal

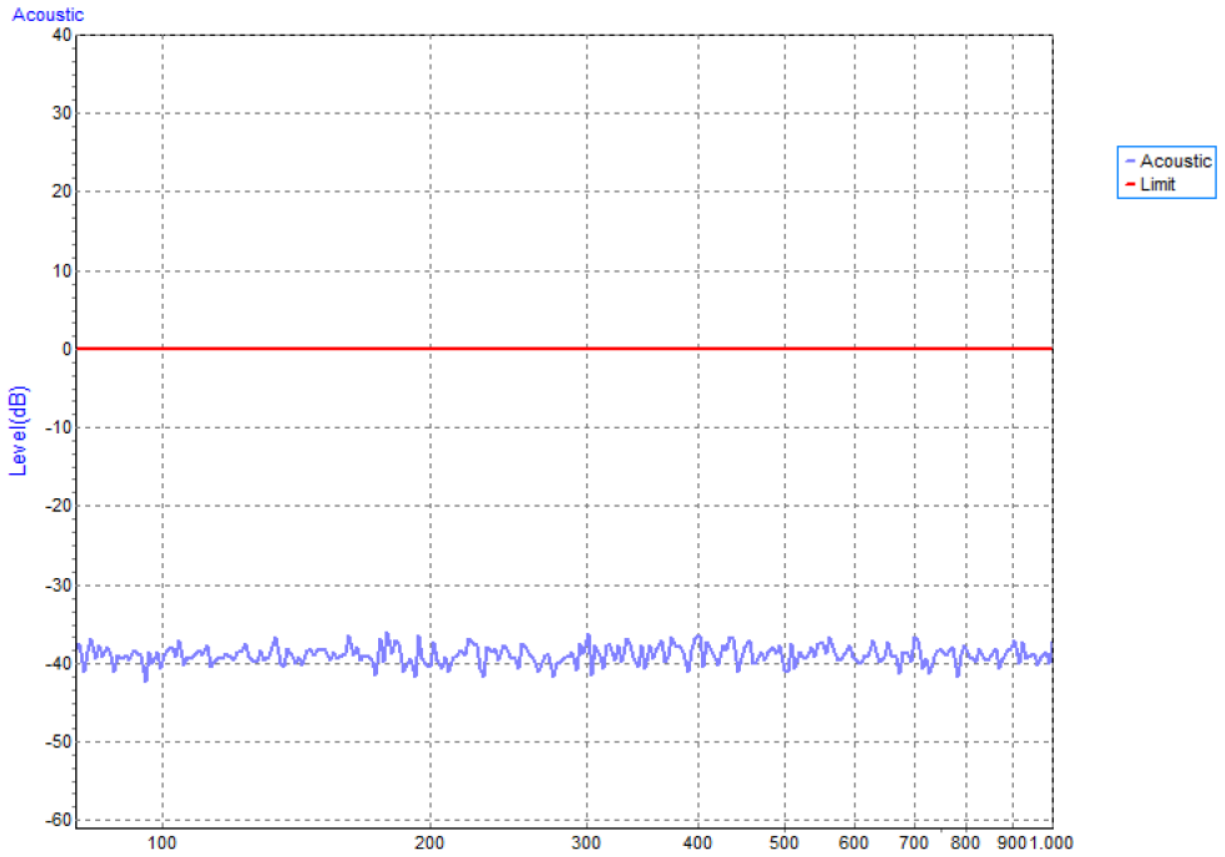


## (2) Telephone handset:


Test Voltage	AC 230V/50Hz
Test Mode	Rear_Vertical

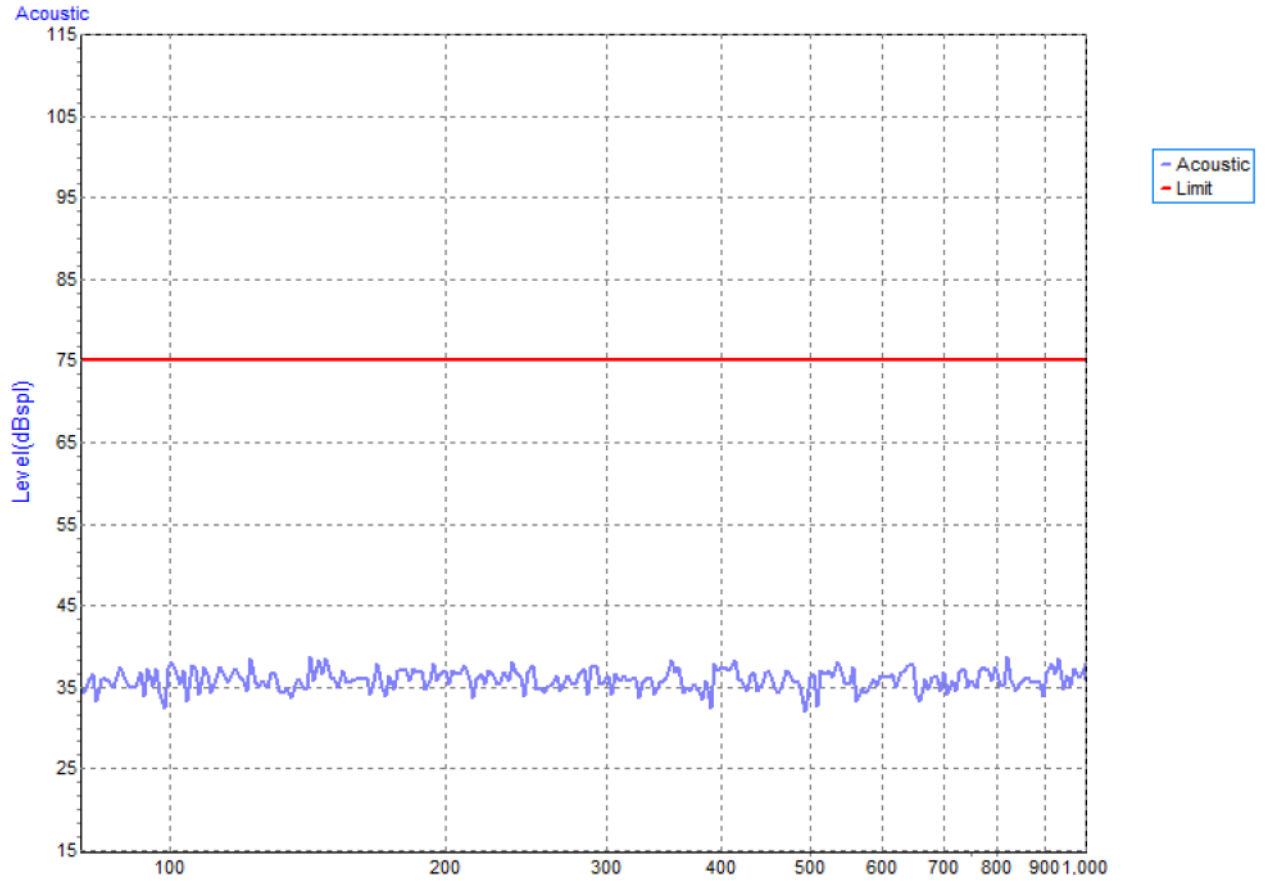


Test Voltage	AC 230V/50Hz
Test Mode	Rear_Horizontal

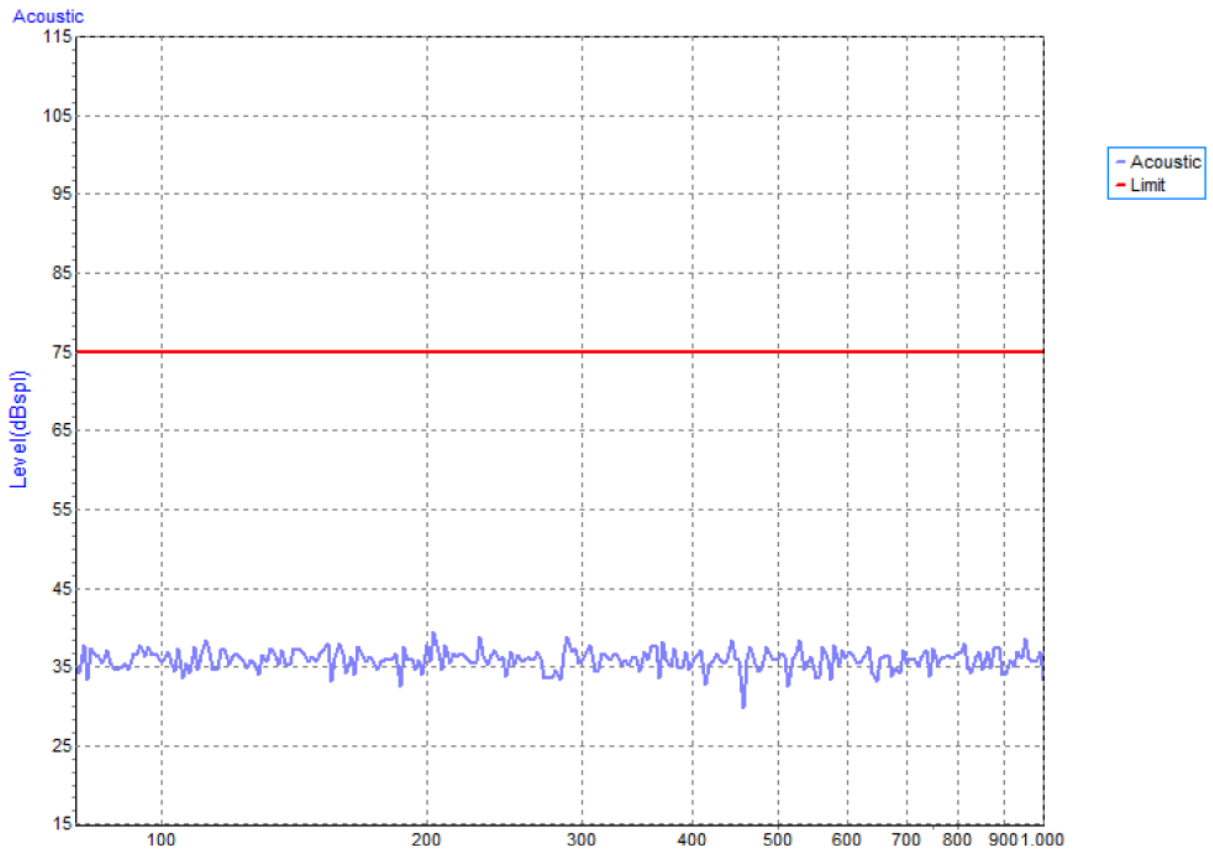

Test Voltage	DC 48V
Test Mode	Rear_Vertical

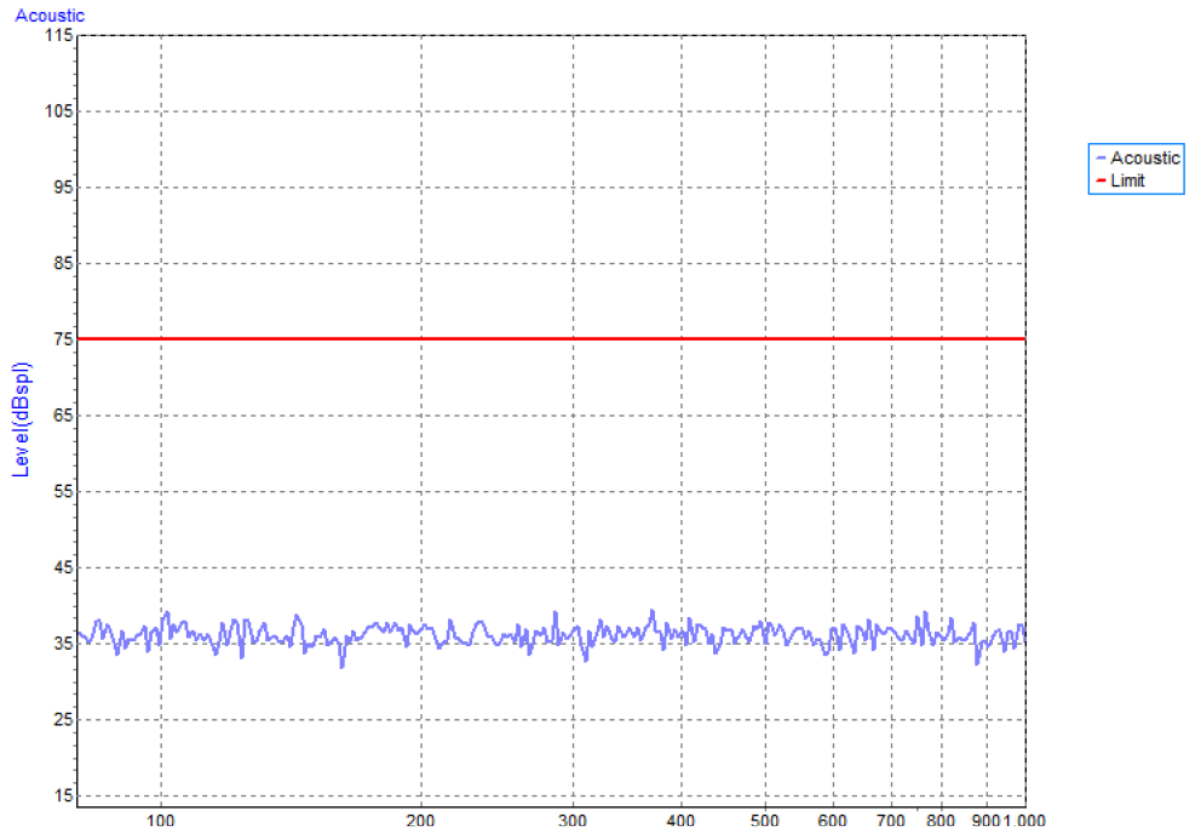


Test Voltage	DC 48V
Test Mode	Rear_Horizontal

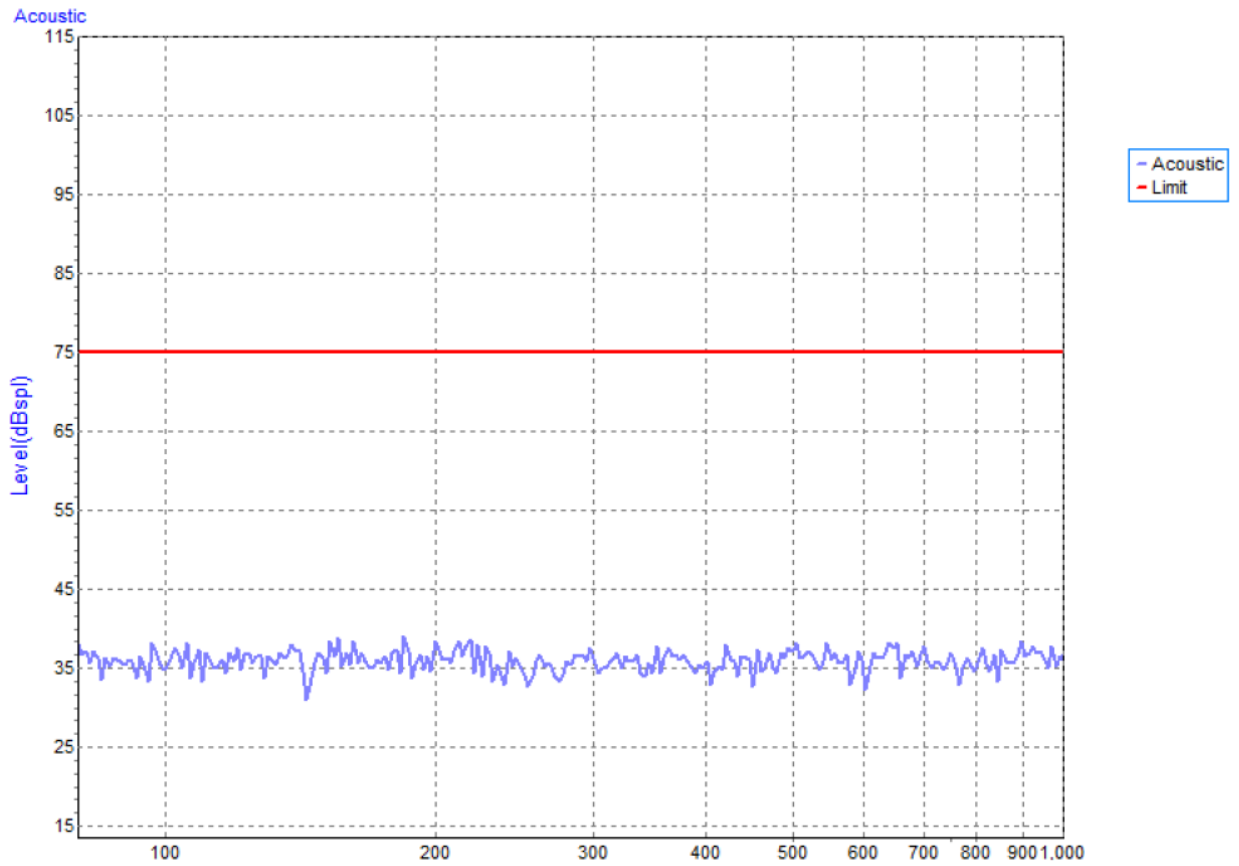


(3) Wired network connection (measure using a remote AE):

Test Voltage	AC 230V/50Hz
Test Mode	Rear_Vertical

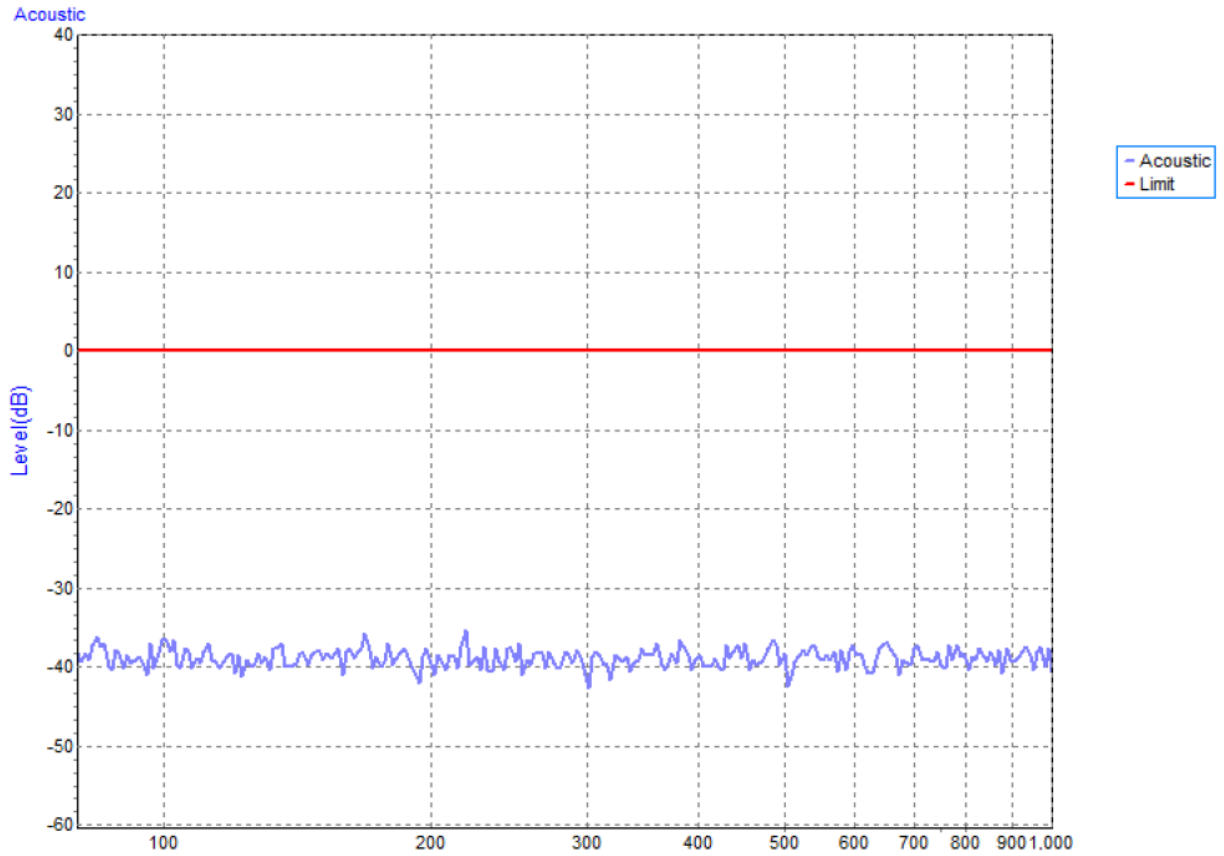



Test Voltage	AC 230V/50Hz
Test Mode	Rear_Horizontal

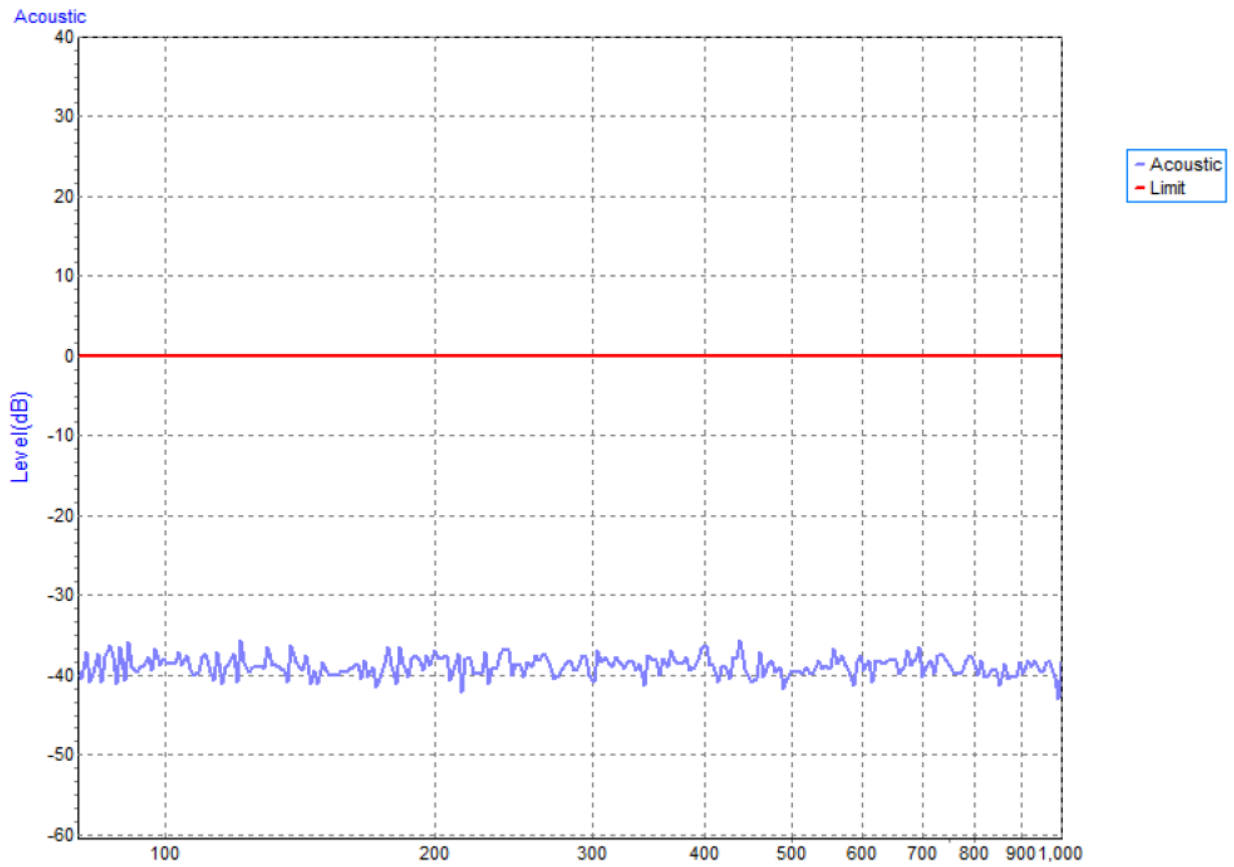

## 4.6 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT)

### 4.6.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-4
Required Performance	B
Test Voltage	AC mains power ports: $\pm 1$ kV Analogue/digital data ports: $\pm 0.5$ kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	1 min.

### 4.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Fast Transient Burst Simulator	Prima	EFT61004TA	PR190741004	Jul. 10, 2022
2	EFT	Prima	EFT_Series V1.0.0.0.201807 10	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.6.3 TEST PROCEDURE

For TABLE-TOP equipment:


The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m $\pm$  0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

- a. Both positive and negative polarity discharges were applied.
- b. The duration time of each test sequential was 1 minute

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

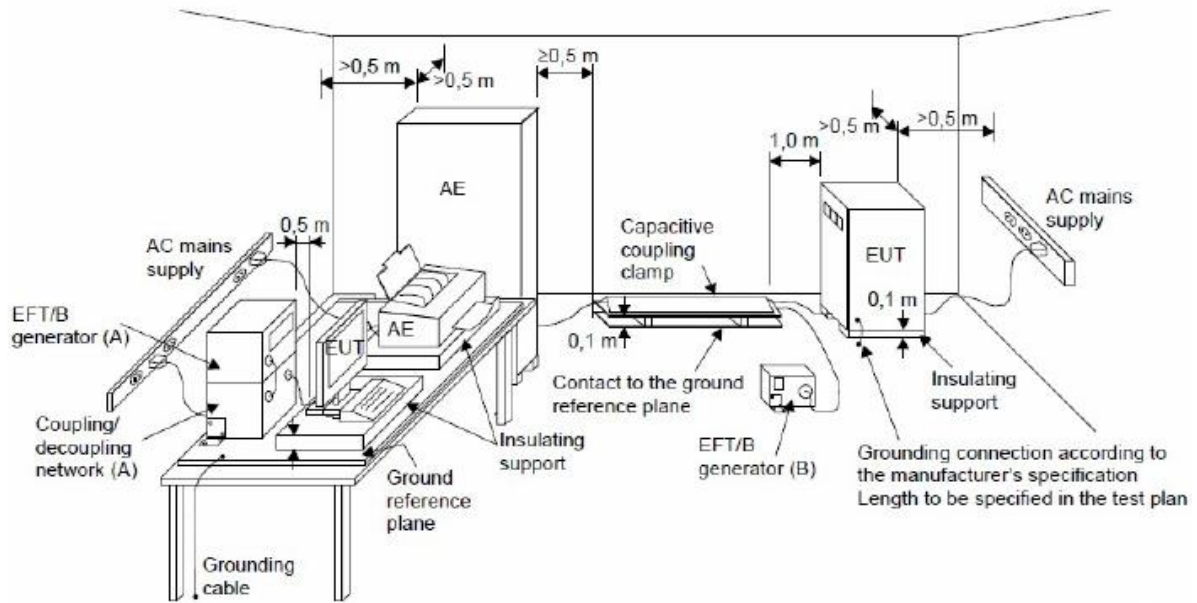

#### 4.6.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 3

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				1kV		
AC Power Port	Line (L)	+	5 kHz	B	B	B
		-	5 kHz	B		
	Neutral (N)	+	5 kHz	B	B	B
		-	5 kHz	B		
	L+N	+	5 kHz	B	B	B
		-	5 kHz	B		

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				0.5kV		
Analogue/digital data ports	LAN	+	5 kHz	B	B	B
		-	5 kHz	B		
	PC PORT	+	5 kHz	B	B	B
		-	5 kHz	B		

Test Voltage	DC 48V
Test Mode	Mode 1-Mode 3

EUT Ports Tested		Polarity	Repetition Frequency	Test Level	Criterion	Result
				0.5kV		
Analogue/digital data ports	LAN	+	5 kHz	B	B	B
		-	5 kHz	B		
	PC PORT	+	5 kHz	B	B	B
		-	5 kHz	B		

## 4.7 SURGE IMMUNITY TEST (SURGE)

### 4.7.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-5
Required Performance	B(AC mains power ports)
Wave-Shape	1.2/50(8/20) Tr/Th $\mu$ s combination wave
Test Voltage	AC mains power ports: $\pm 0.5$ kV, $\pm 1$ kV
Generator Source Impedance	2 $\Omega$ of the low-voltage power supply network.
Phase Angle, Polarity and Number of Tests	Five positive pulses line-to-neutral at 90° phase Five negative pulses line-to-neutral at 270° phase
Pulse Repetition Rate	1 time / min

### 4.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Lightning Surge Generator	Prima	SUG61005TB	PR190854067	Jul. 10, 2022
2	Surge	Prima	SUG_Series V1.0.0.7.201908 27	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.7.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrester cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.5 TEST SETUP

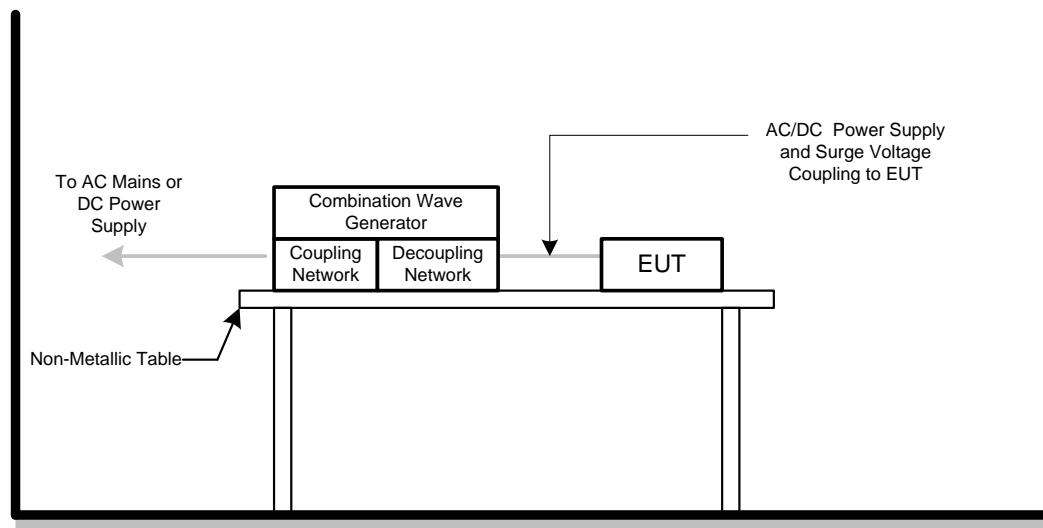

#### 4.7.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 3

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thµs						Criterion	Result
		Polarity	Phase	Voltage					
				0.5kV	1kV	-- kV	-- kV		
AC	L – N	+	90°	B	B	-	-	B	B
		-	270°	B	B	-	-		

## 4.8 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

### 4.8.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-6
Required Performance	A
Frequency Range&Field Strength	0.15 MHz - 10 MHz: 3V (unmodulated, r.m.s.) 10 MHz - 30 MHz: 3V to 1V (unmodulated, r.m.s.) 30 MHz - 80 MHz: 1V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of the preceding frequency value
Dwell Time	3 seconds

### 4.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Feb. 27, 2022
2	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 10, 2022
3	TEST SYSTEM FOR CONDUCTED AND RADIATED IMMUNITY	TESEQ	NSG 4070B	37513	Jul. 10, 2022
4	Coupling Decoupling Network	Teseq GmbH	CDN T8-10	40373	Jul. 10, 2022
5	Measurement Software	Farad	EZ-CS (V2.0.1.4)	N/A	N/A
6	Free-field 1/2` Microphone	B&K	4190-L-001	2878077	Jun. 10, 2022
7	UPV Audio Analyzer	R&S	UPV	104259	Feb. 27, 2022

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The field strength level was 3 V (unmodulated, r.m.s.)
- b. The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sinewave. Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.




For Acoustic measurements:

- a. Apply an appropriate input signal to the EUT so that a sine wave (tone) at the frequency that will be used to modulate the applied disturbance (typically 1 kHz) is generated from the port under test at a level equal to the acoustic reference level.
- b. Record the resulting dB (SPL) level (or other appropriate dB unit) as the value of  $L_0$ . (BTL lab uses the software to take  $L_0$  as the reference value and make it return to zero.)
- c. Change the input to the EUT so that the port under test is silent, or represents silence. This change shall not alter the terminating impedance at the EUT's input.
- d. Apply the RF disturbance to the applicable port of the EUT and record the resulting demodulated audio level in dB (SPL) (or other dB unit used in step d)) as the value of  $L_1$ .
- e. Ensure that non-linear processing does not impact the measurements.
- f. Calculate the acoustic interference ratio using the following formula:  
Acoustic interference ratio =  $L_1 - L_0$ .  
(For step e-g, BTL lab proceeds the test with software and calculate Acoustic interference ratio =  $L_1 - L_0$ ).


#### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation


#### 4.8.5 TEST SETUP

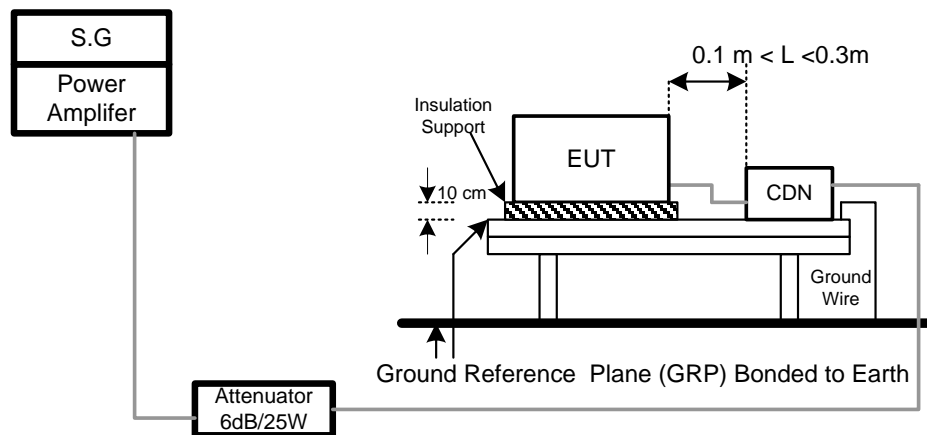

**For Audio output function**  
**(1) Loudspeaker**

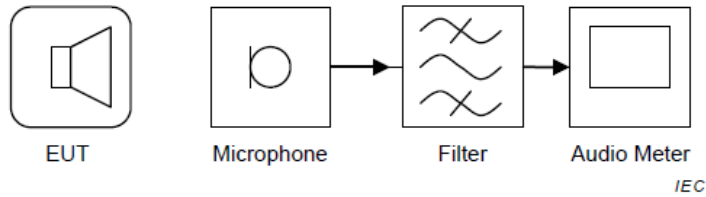


The filter is the audio filter specified in G.6.1 and is typically incorporated into the audio meter. Additional filtering might be necessary to ensure that the RF disturbance signal does not interfere with the measurement

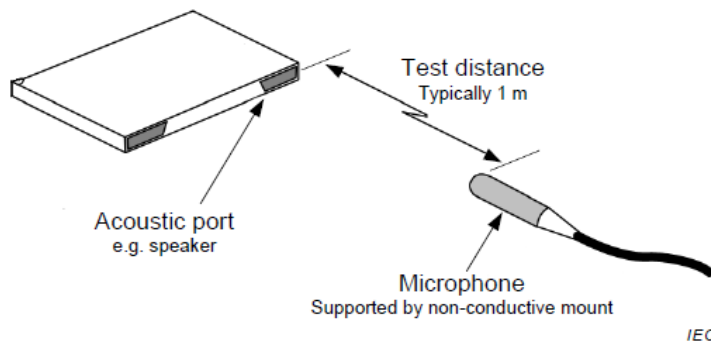

The microphone is connected via the cable to a suitable amplifier. Ensure that there is minimal acoustic loss between EUT and microphone.

**(2) On-ear acoustic measurements:**

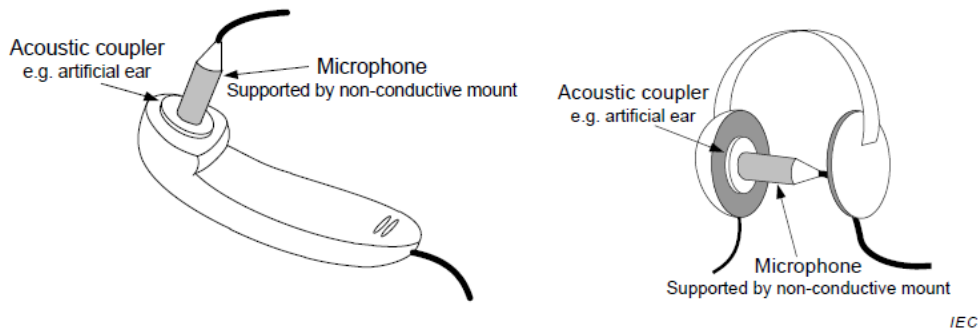

NOTE 1 The microphone is connected via the cable to a suitable amplifier.

NOTE 2 This setup cannot be suitable for radiated testing. See G.6.3.

#### 4.8.6 TEST RESULTS

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 3

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
AC mains power ports	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			
Analogue/digital data ports (LAN)	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			
Analogue/digital data ports (PC PORT)	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			


Test Voltage	DC 48V
Test Mode	Mode 1-Mode 3

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Modulation	Criteria	Results
Analogue/digital data ports (LAN)	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			
Analogue/digital data ports (PC PORT)	0.15 - 10	3V	AM Modulated 1000Hz, 80%	A	A
	10 - 30	3V to 1V			
	30 - 80	1V			


### For Audio output function

(1) Loudspeaker:


Test Voltage	AC 230V/50Hz
Test Mode	CDN M2

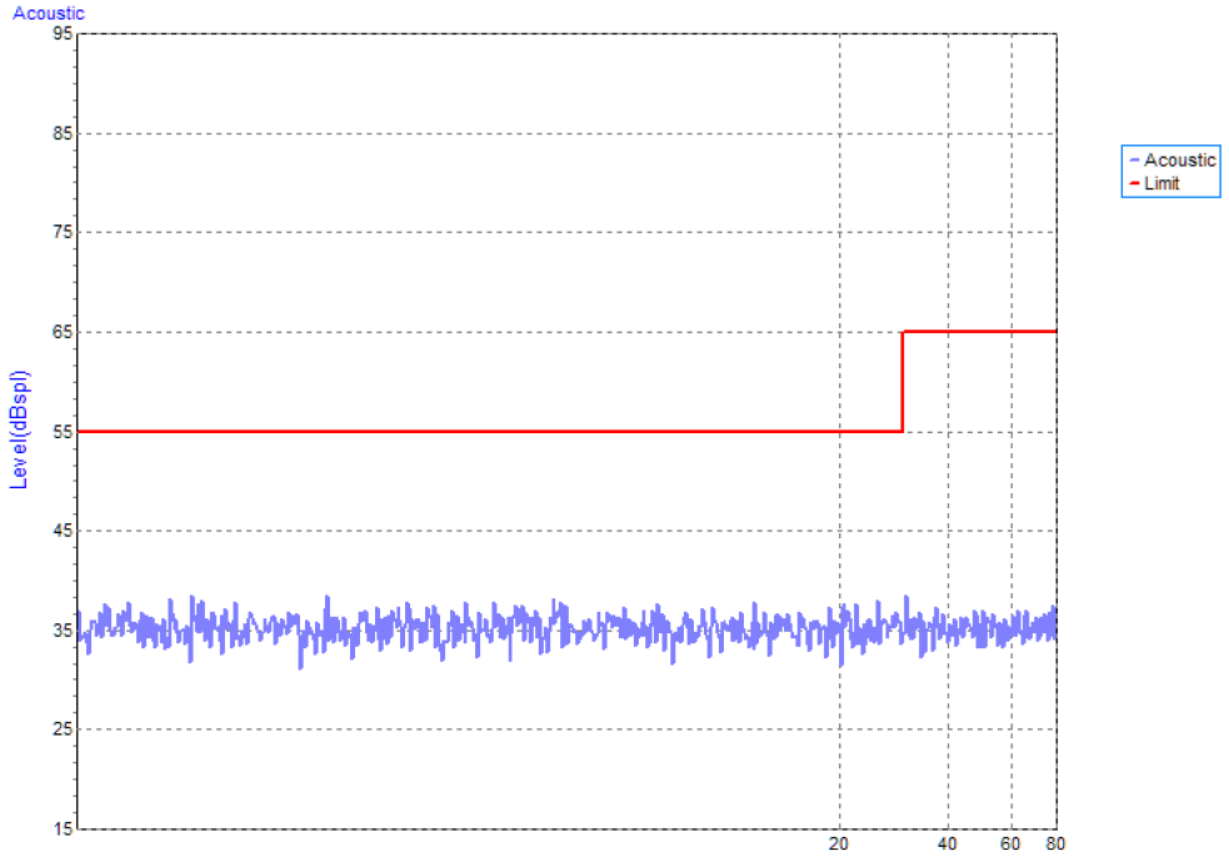


Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_LAN

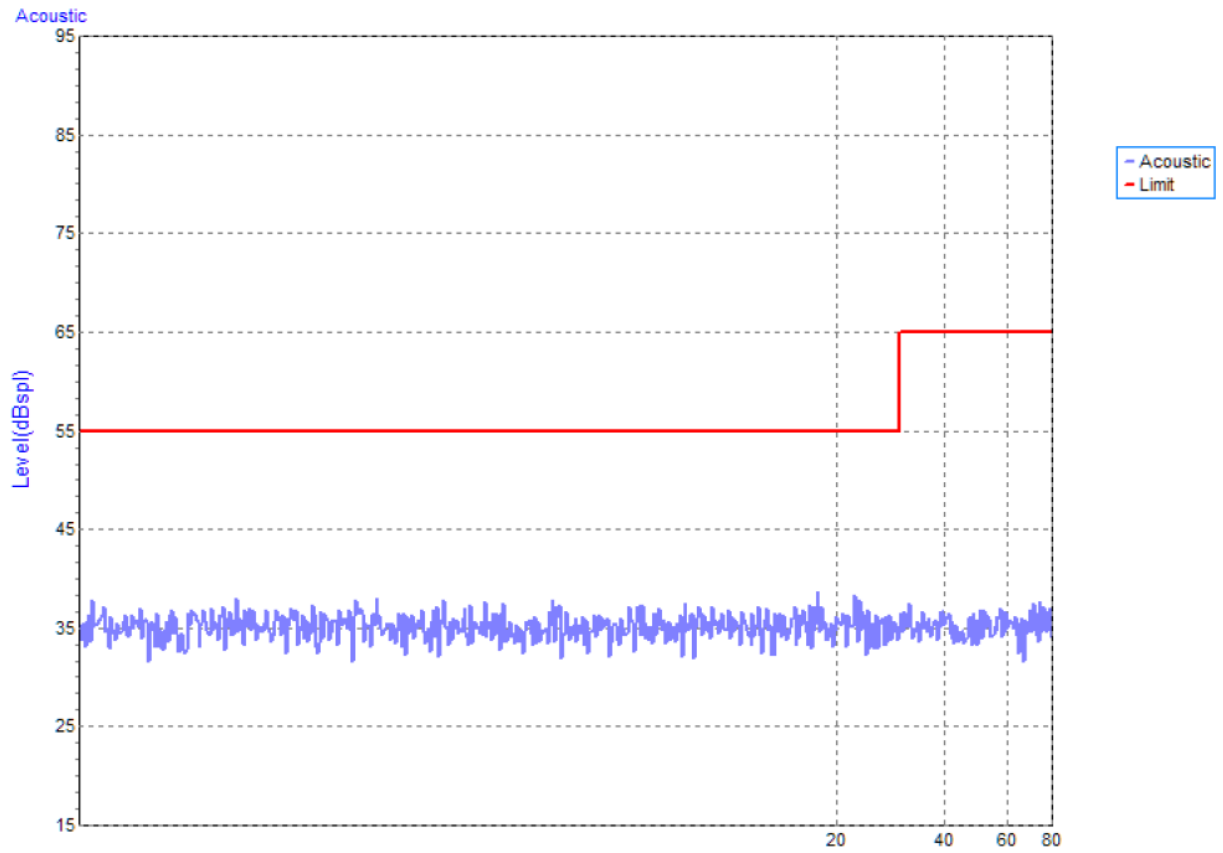


Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_PC PORT

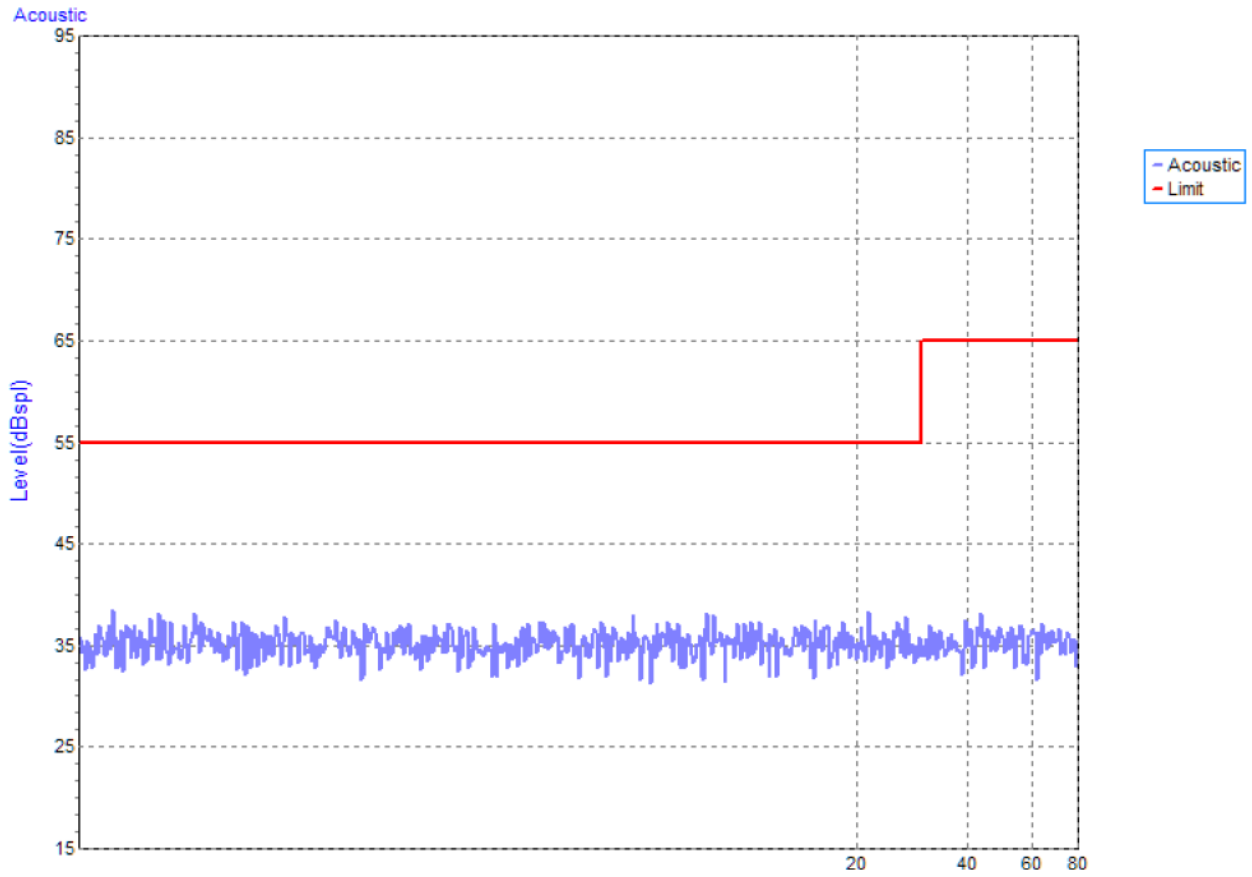

Test Voltage	DC 48V
Test Mode	CDN T8_LAN

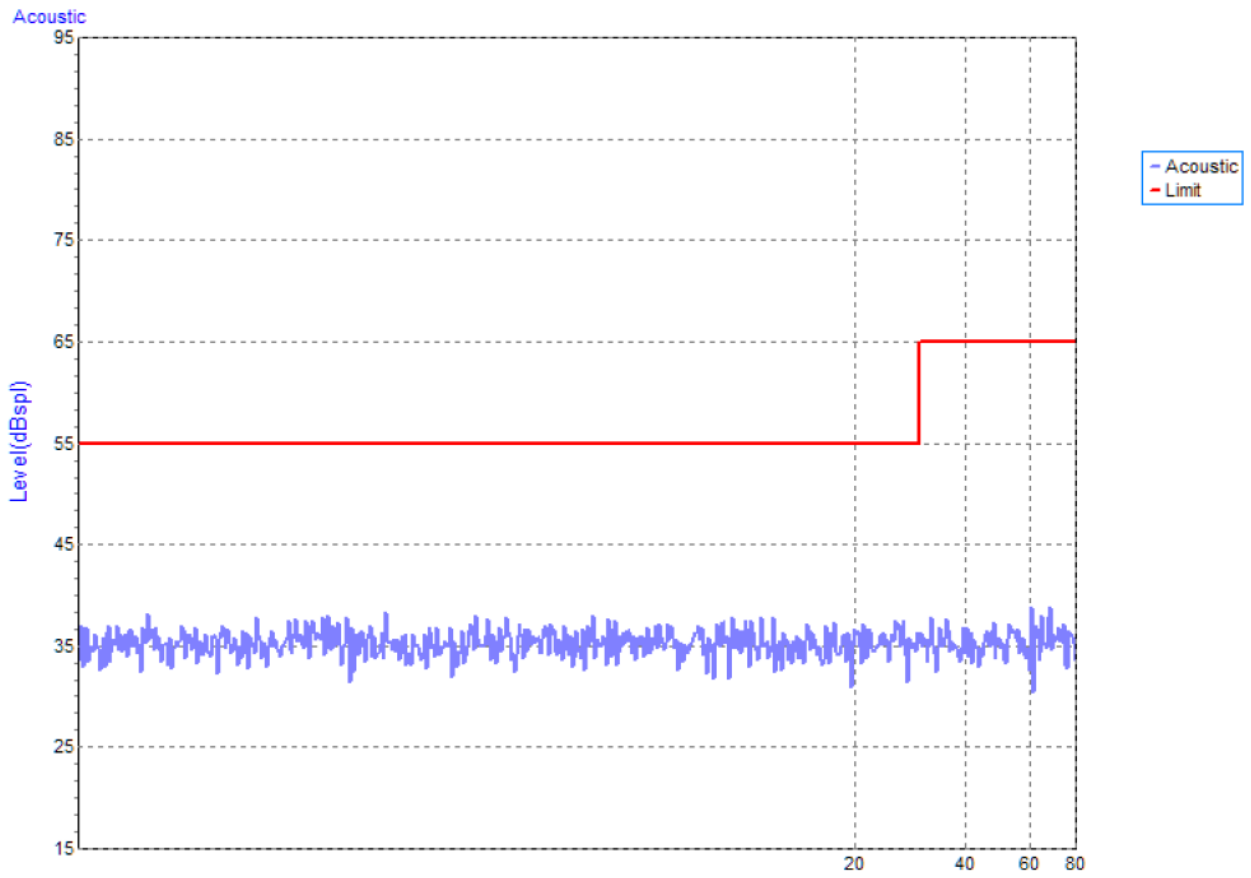


Test Voltage	DC 48V
Test Mode	CDN T8_PC PORT

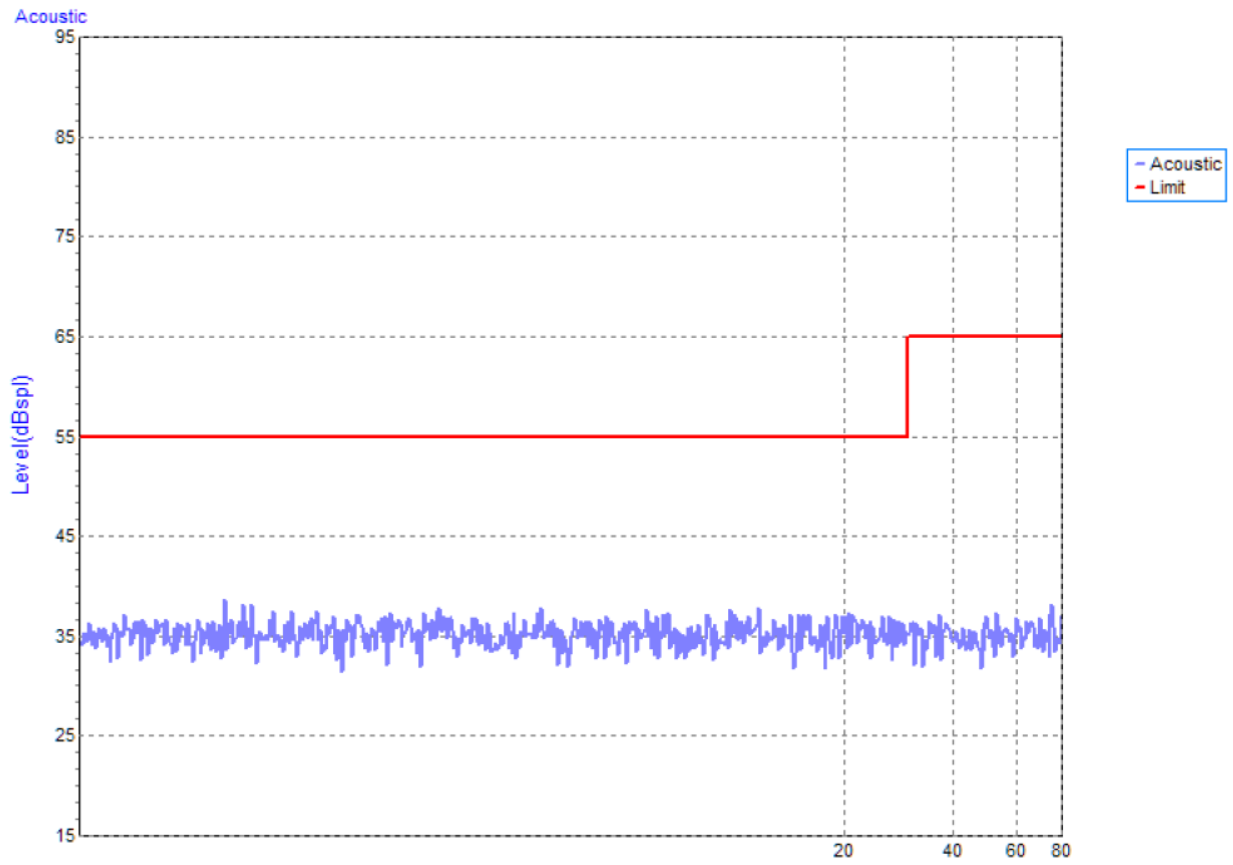




(2) On-ear acoustic measurements:


Test Voltage	AC 230V/50Hz
Test Mode	CDN M2

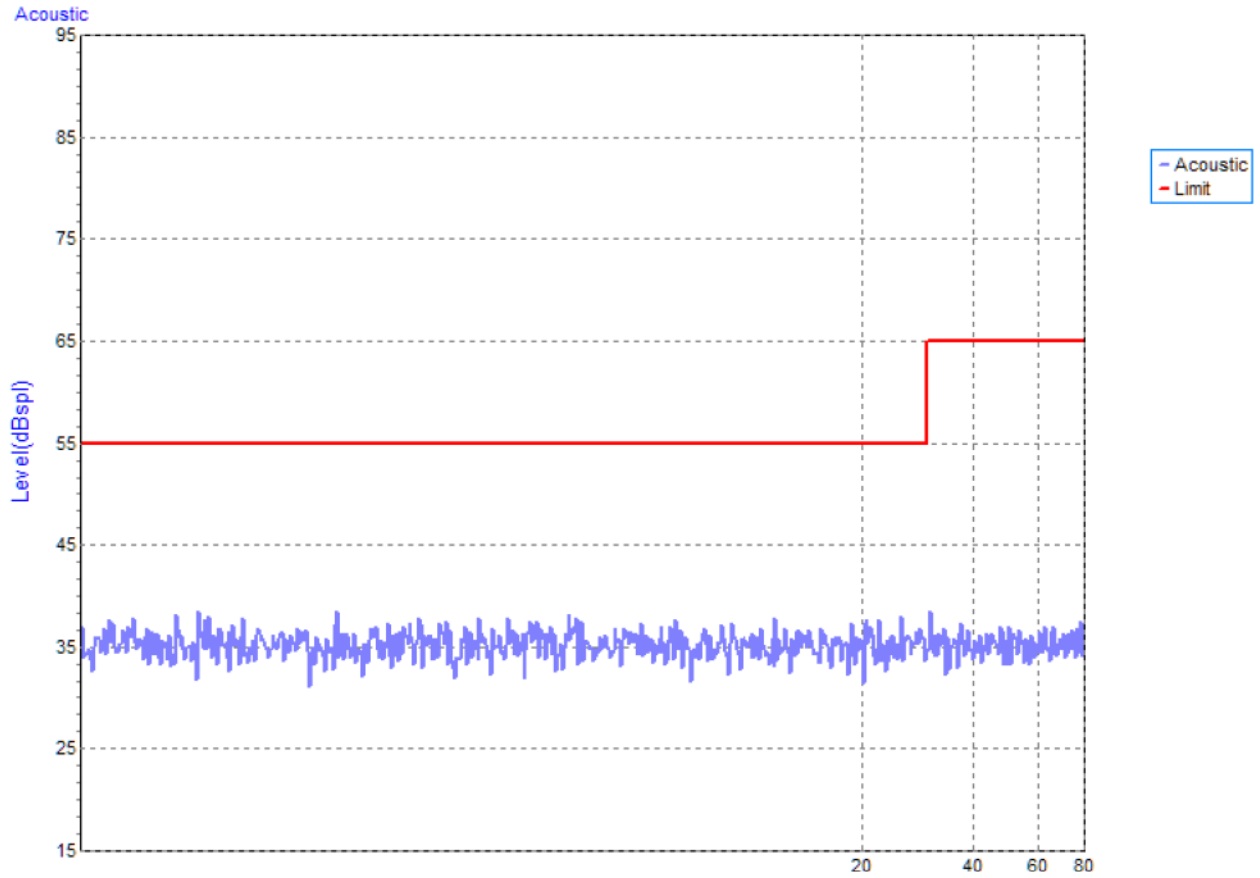


Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_LAN

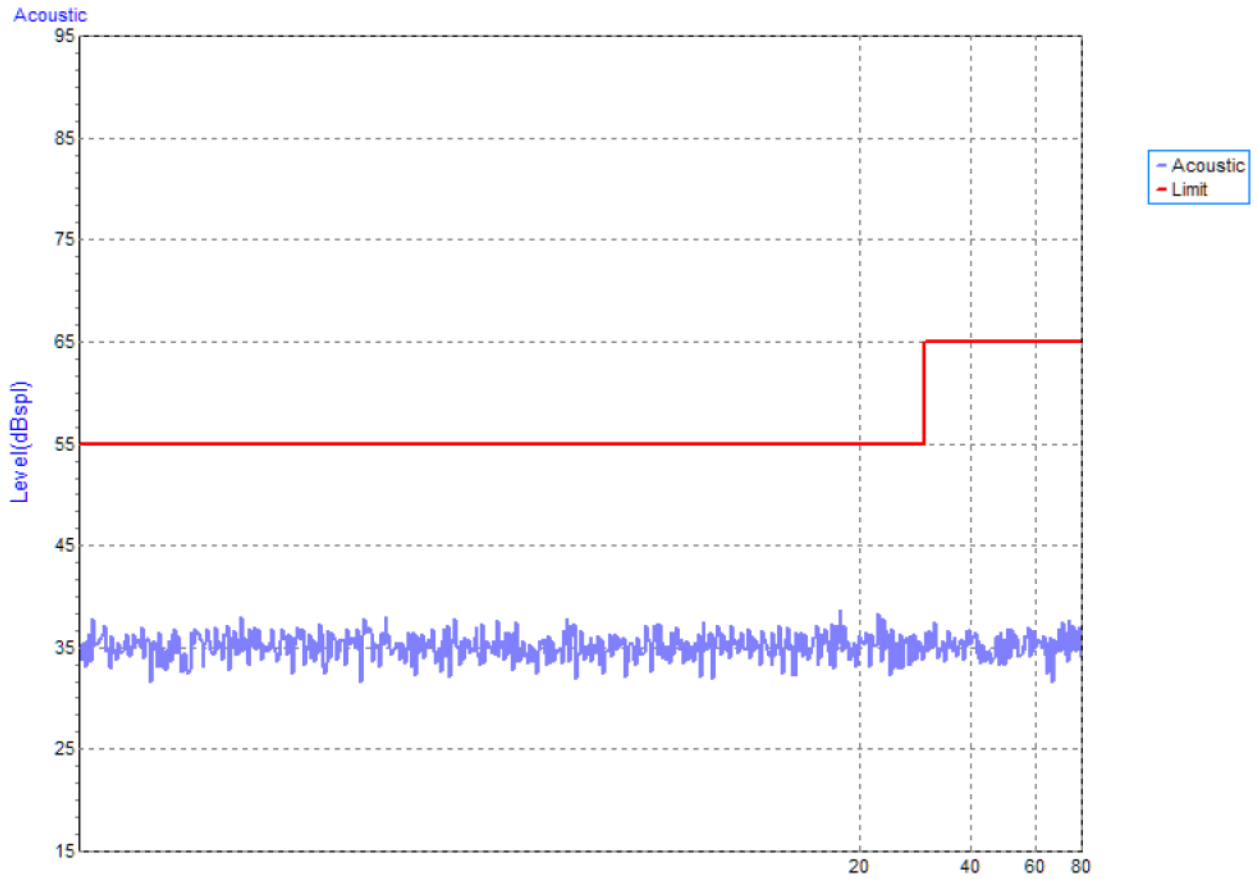


Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_PC PORT

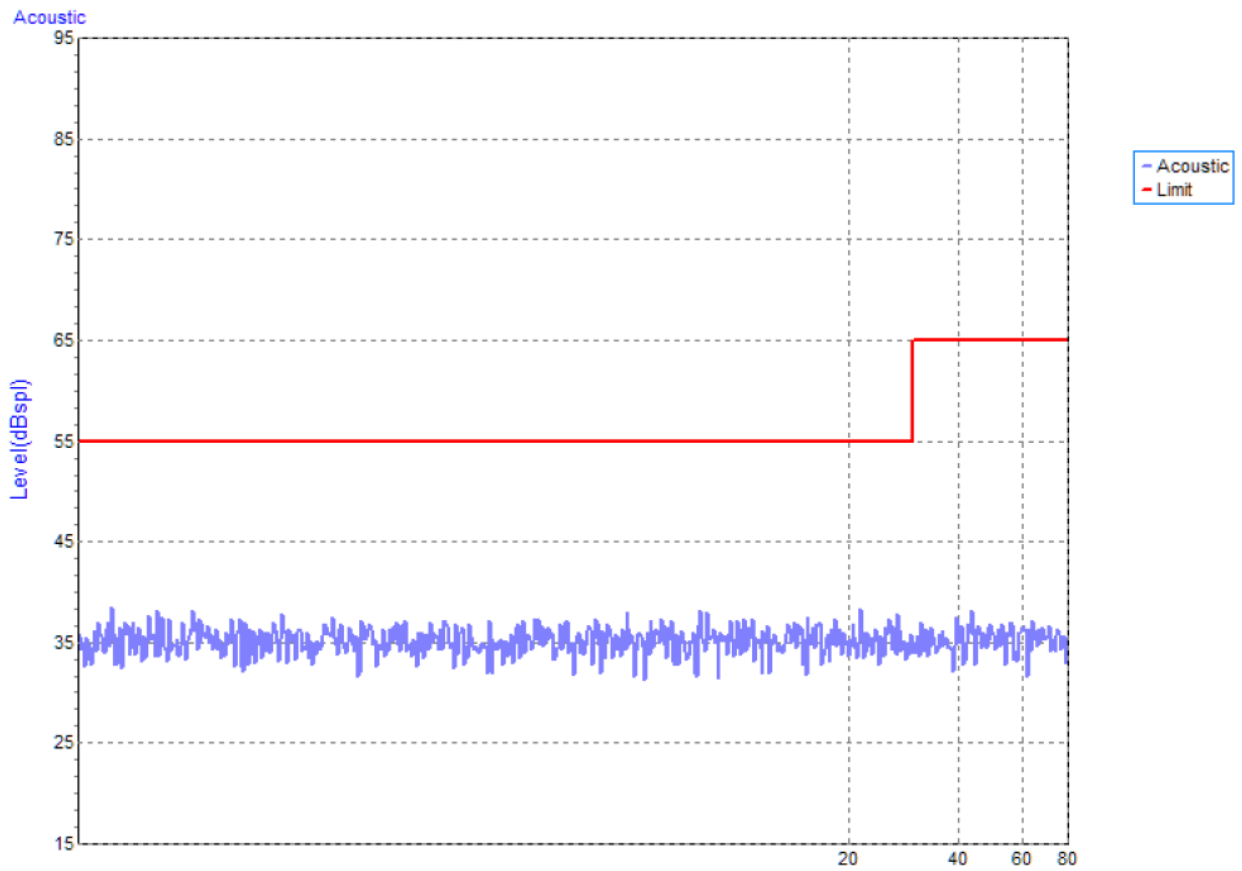

Test Voltage	DC 48V
Test Mode	CDN T8_LAN

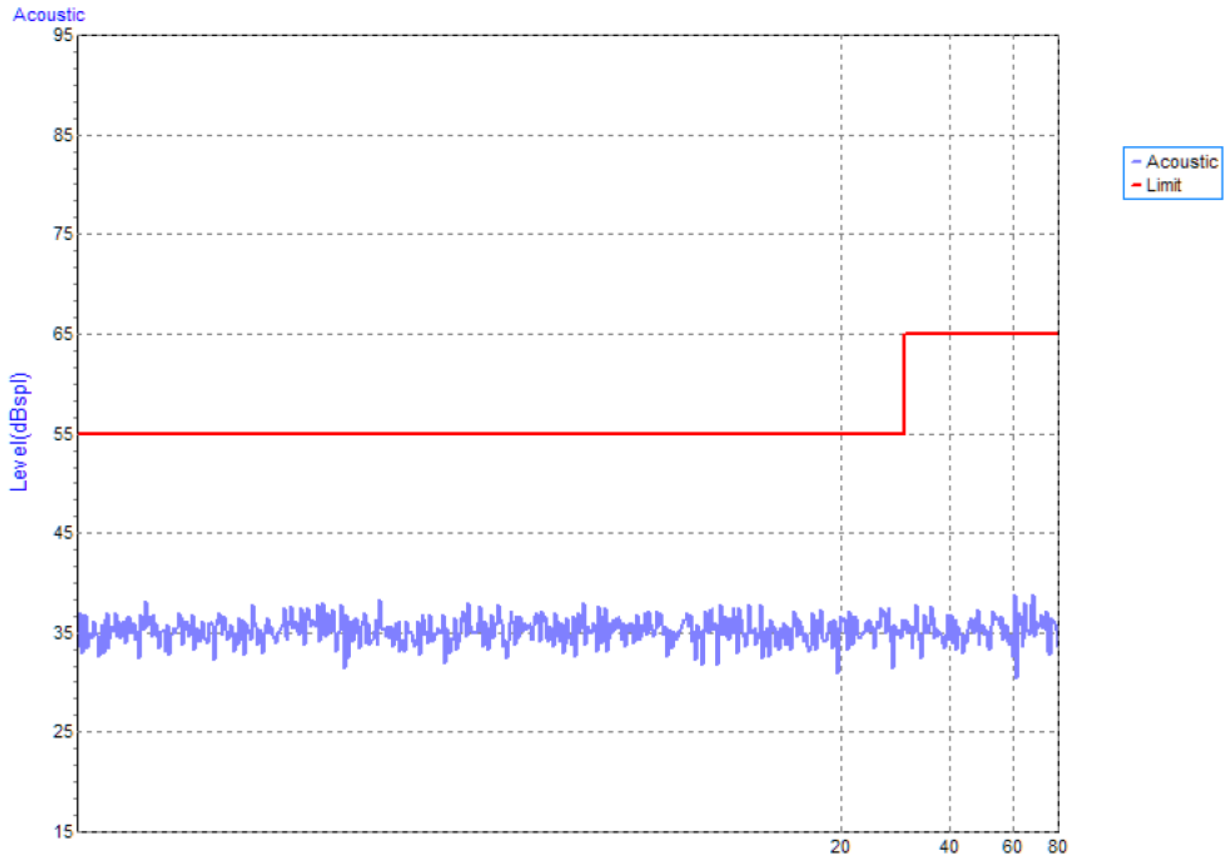


Test Voltage	DC 48V
Test Mode	CDN T8_PC PORT

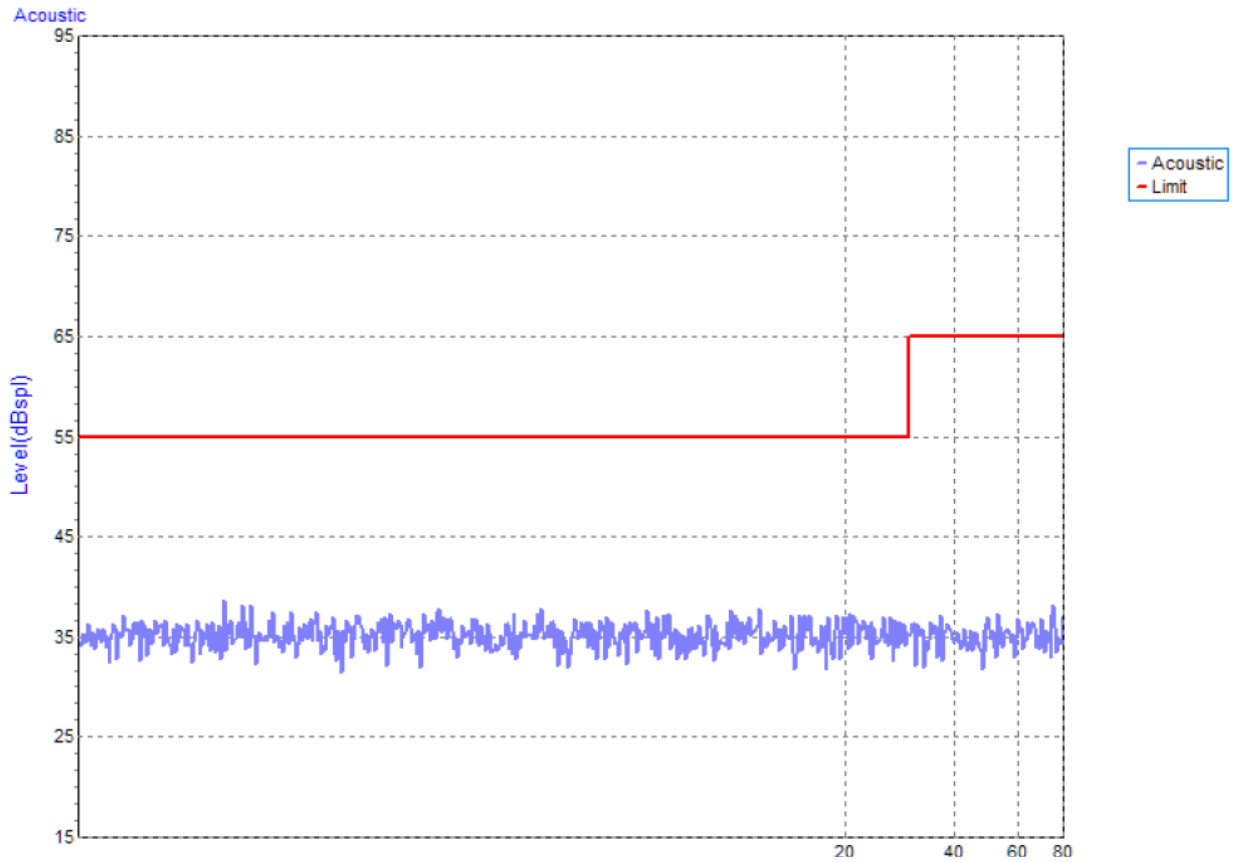


(3) Wired network connection (measure using a remote AE):


Test Voltage	AC 230V/50Hz
Test Mode	CDN M2

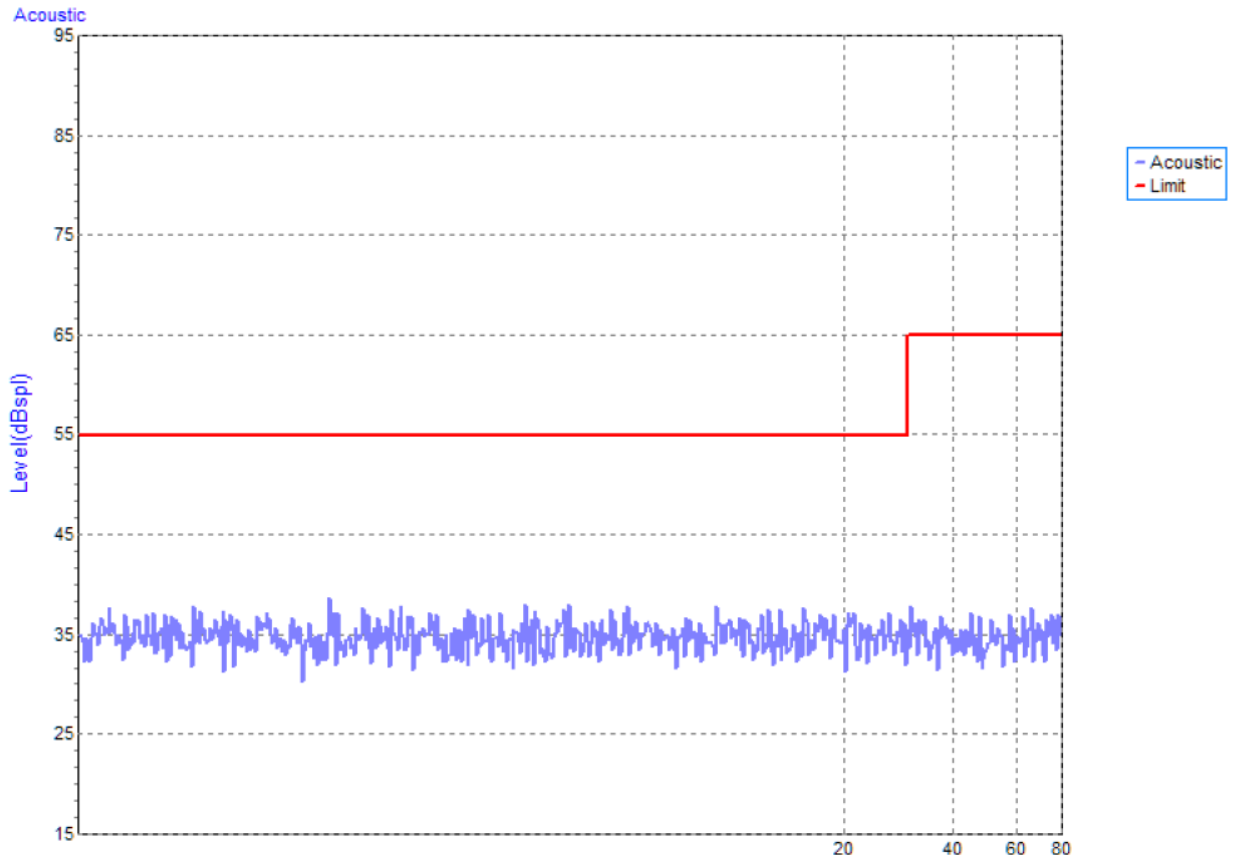

Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_LAN

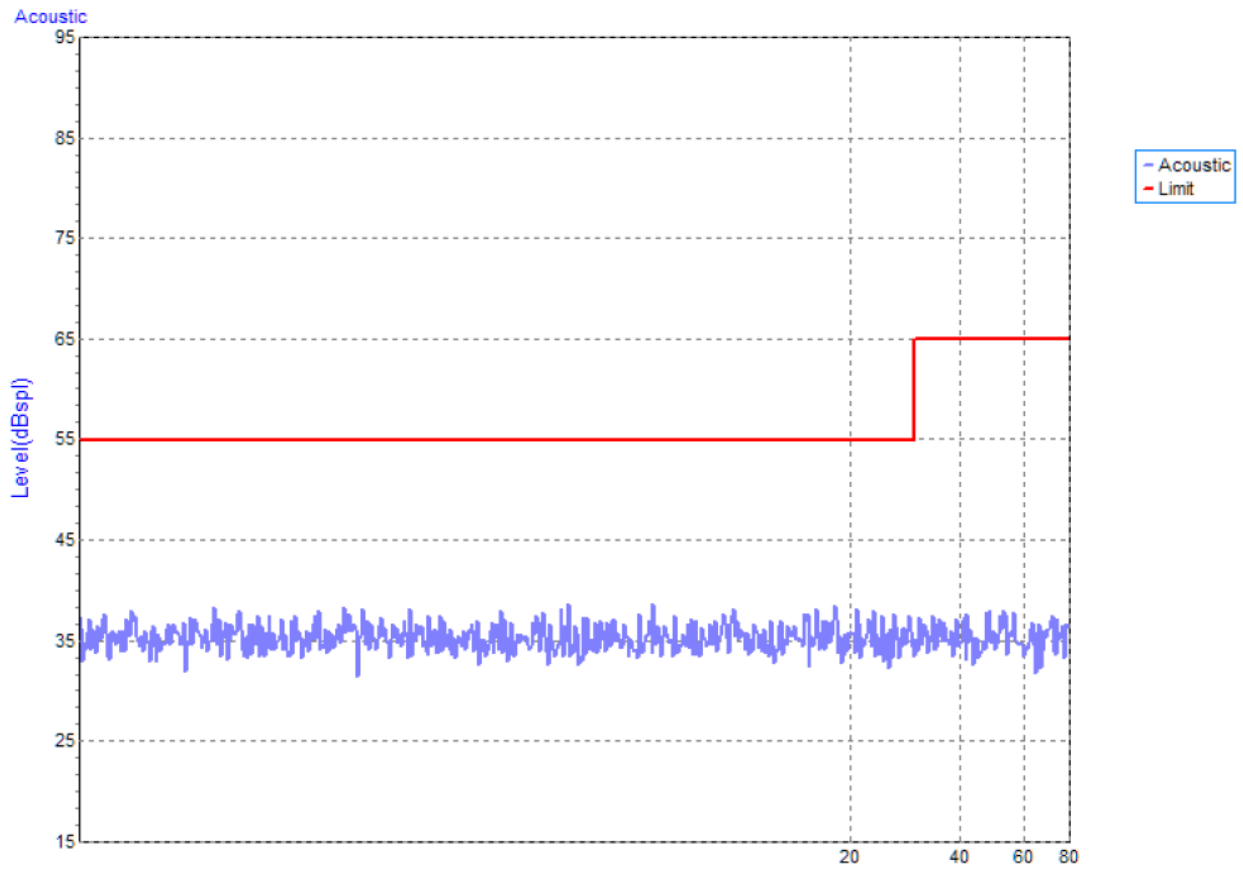


Test Voltage	AC 230V/50Hz
Test Mode	CDN T8_PC PORT

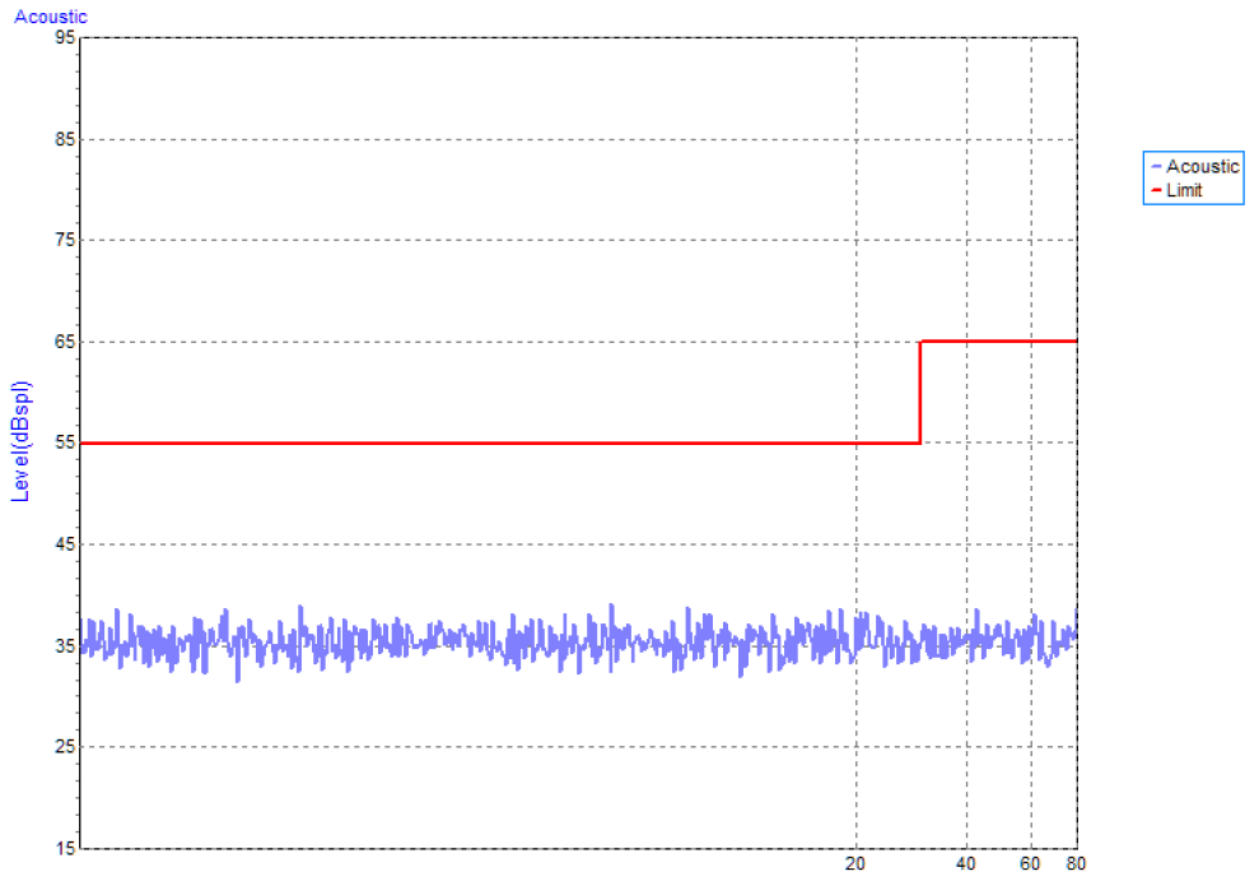




Test Voltage	DC 48V
Test Mode	CDN T8_LAN

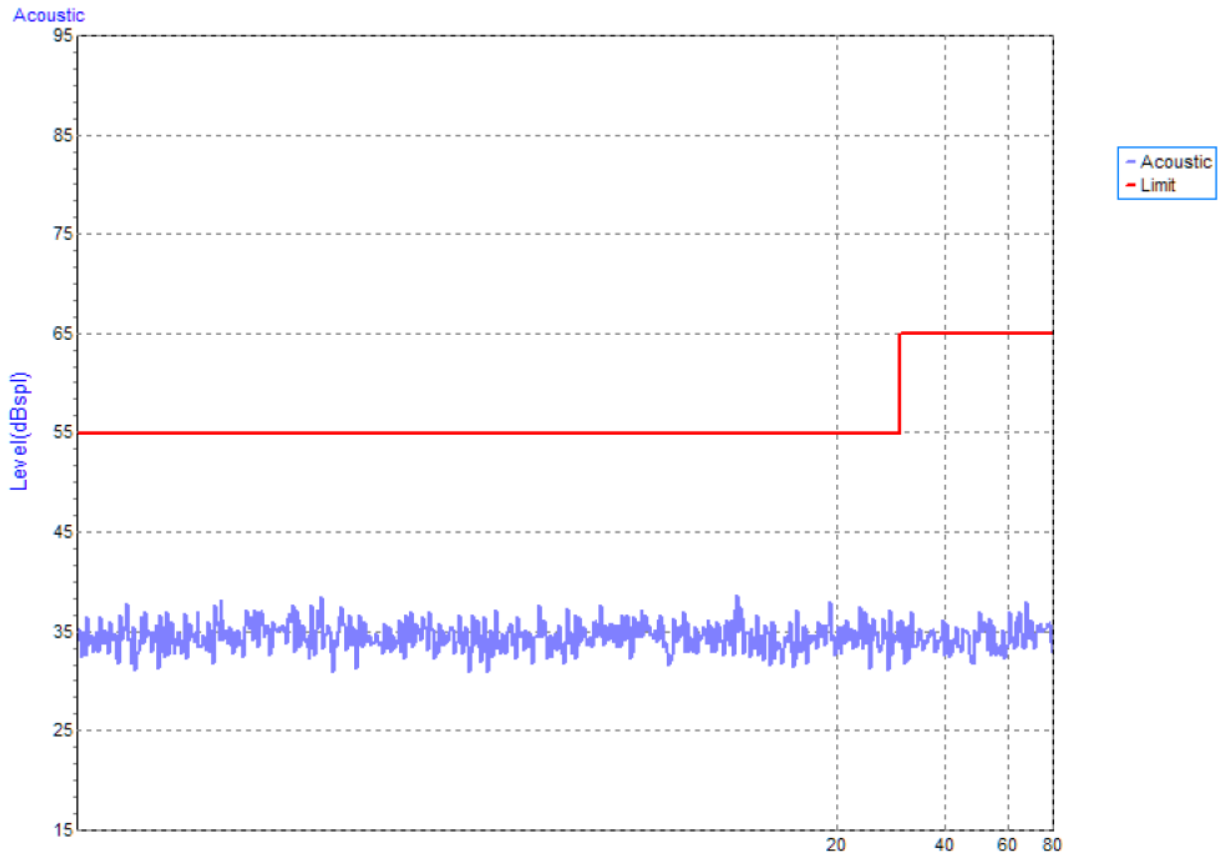

Test Voltage	DC 48V
Test Mode	CDN T8_PC PORT

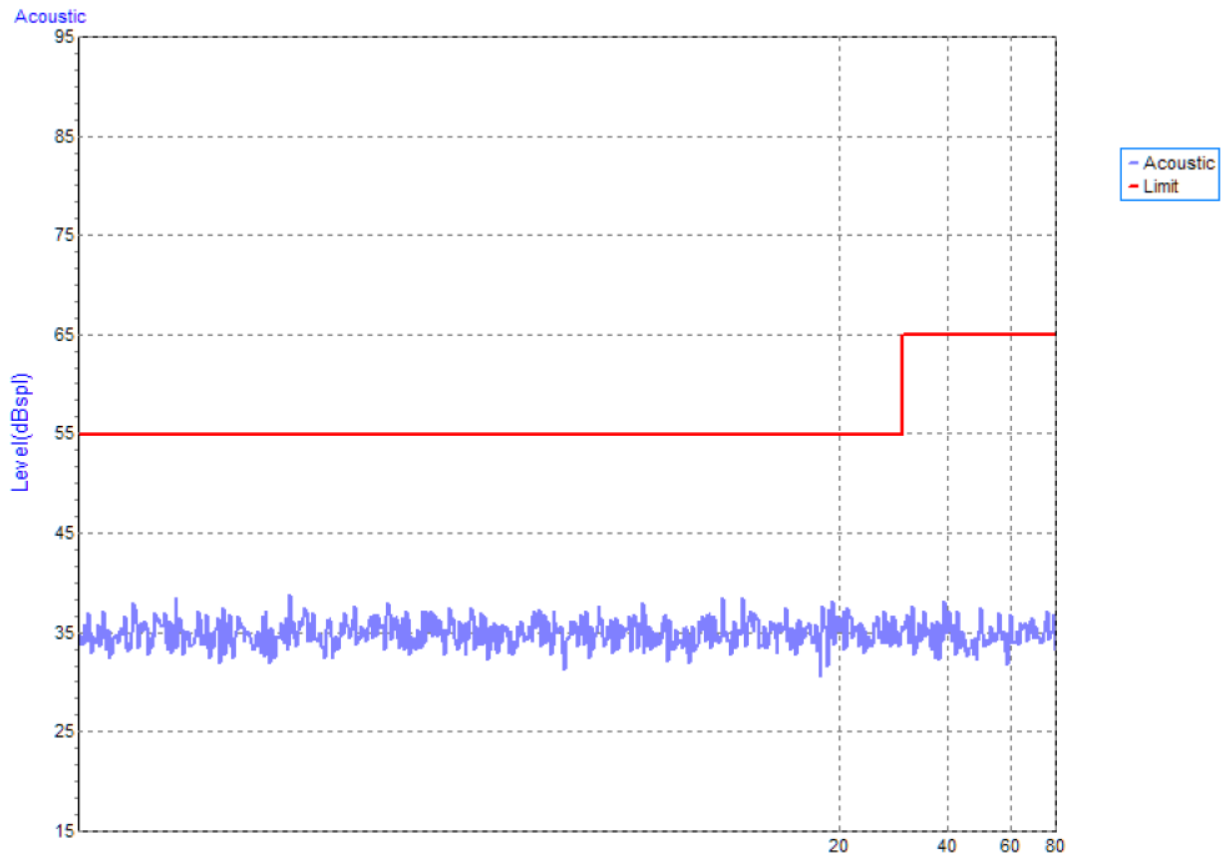

## 4.9 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

### 4.9.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-8
Required Performance	A
Frequency Range	50/60Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

### 4.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	4032	Feb. 28, 2022
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	4024	Feb. 28, 2022

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

### 4.9.3 TEST PROCEDURE

For TABLE-TOP equipment:


The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

The other condition as following manner:

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

### 4.9.4 DEVIATION FROM TEST STANDARD

No deviation

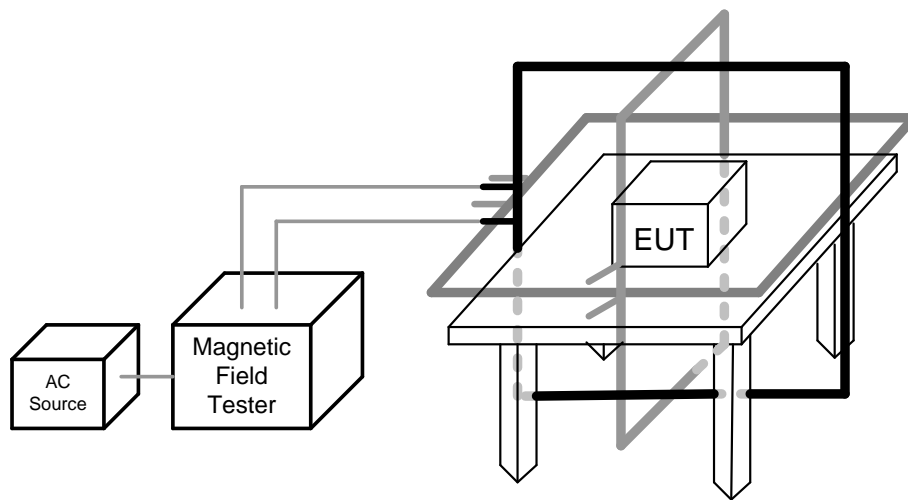**4.9.5 TEST SETUP**

**4.9.6 TEST RESULTS**

Test Voltage	AC 230V/50Hz
Test Mode	Mode 1-Mode 3

## 50Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

## 60Hz

Test Mode	Test Level	Antenna aspect	Duration	Criteria	Results
Enclosure	1 A/m	X	60s	A	A
Enclosure	1 A/m	Y	60s	A	A
Enclosure	1 A/m	Z	60s	A	A

## 4.10 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST (DIPS)

### 4.10.1 TEST SPECIFICATION

Basic Standard	IEC 61000-4-11
Required Performance	Voltage dips: B (For <5% residual voltage, dips) C (For 70% residual voltage, dips) C (For <5% residual voltage, Interruptions)
Interval between Event	Ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

### 4.10.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cycle Sag Simulator	Prima	DRP61011TA	PR19076452	Dec. 01, 2022
2	Measurement Software	Prima	DRP_Series V1.0.0.3.20190123	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


### 4.10.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

### 4.10.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.10.5 TEST SETUP

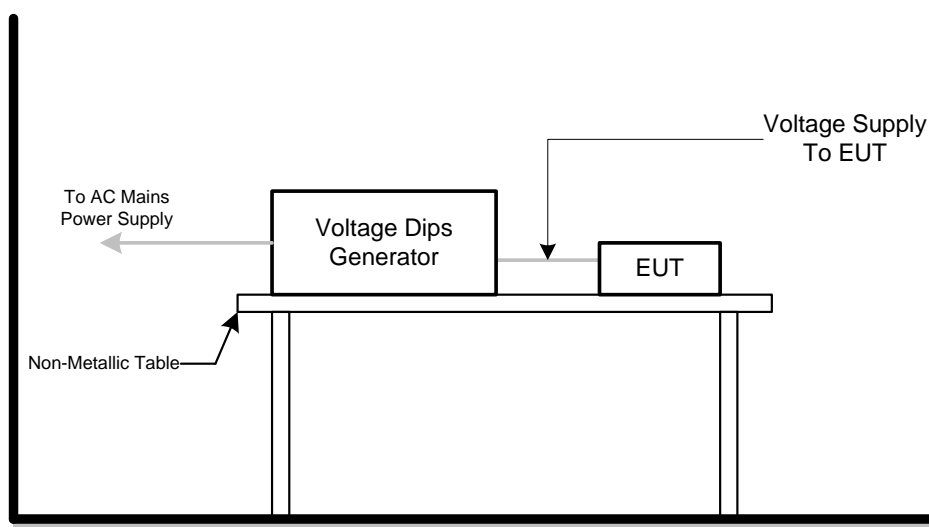

#### 4.10.6 TEST RESULTS

Test Voltage	AC 100V/50Hz, AC 230V/50Hz, AC 240V/50Hz
Test Mode	Mode 1-Mode 3



AC 100V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 230V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C

AC 240V/50Hz				
Item	Residual Voltage	Cycle	Criteria	Results
Voltage dips	<5%	0.5	B	A
Voltage dips	70%	25	C	A
Voltage Interruption	<5%	250	C	C



**5. EUT TEST PHOTO**

Radiated emissions up to 1 GHz

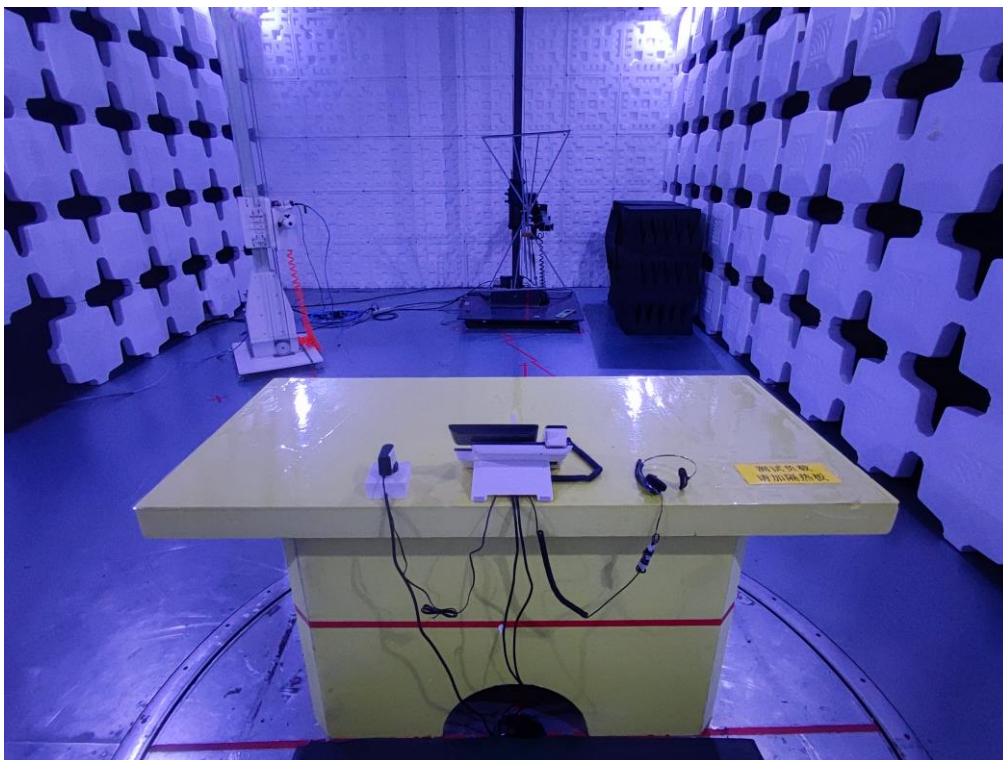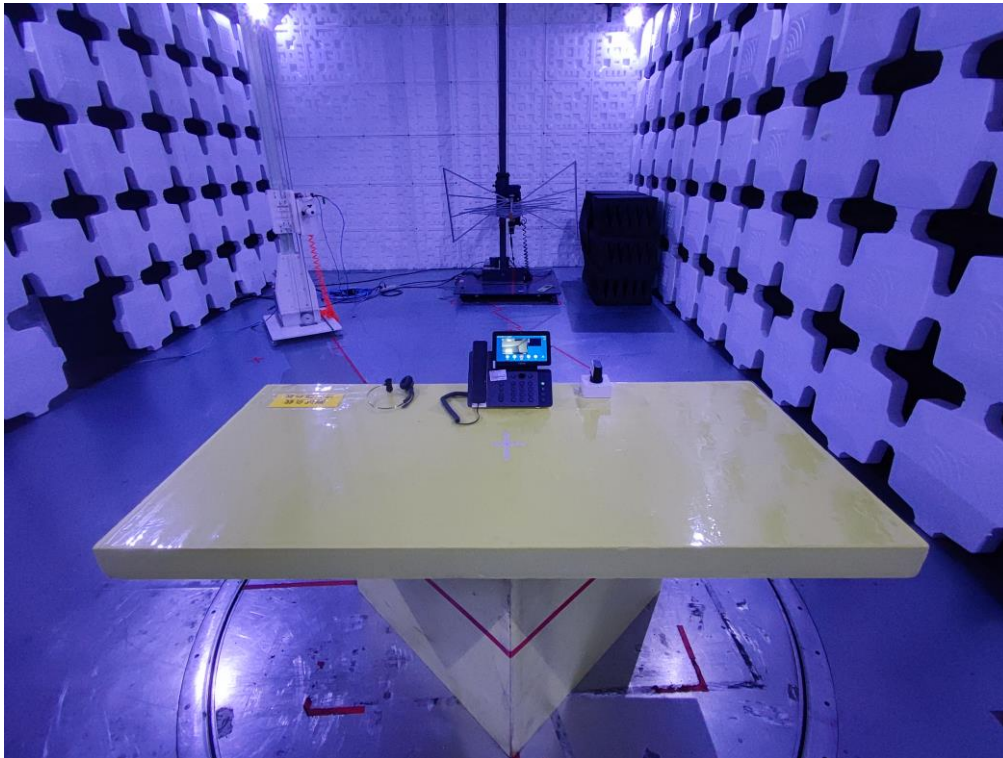




## Radiated emissions above 1 GHz

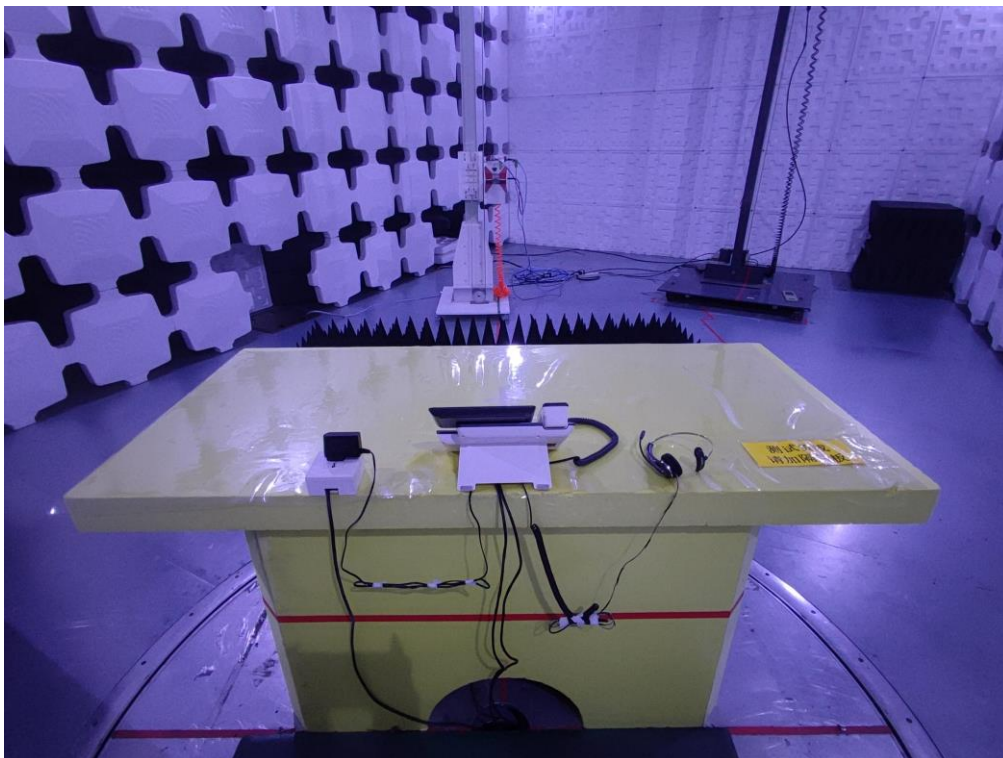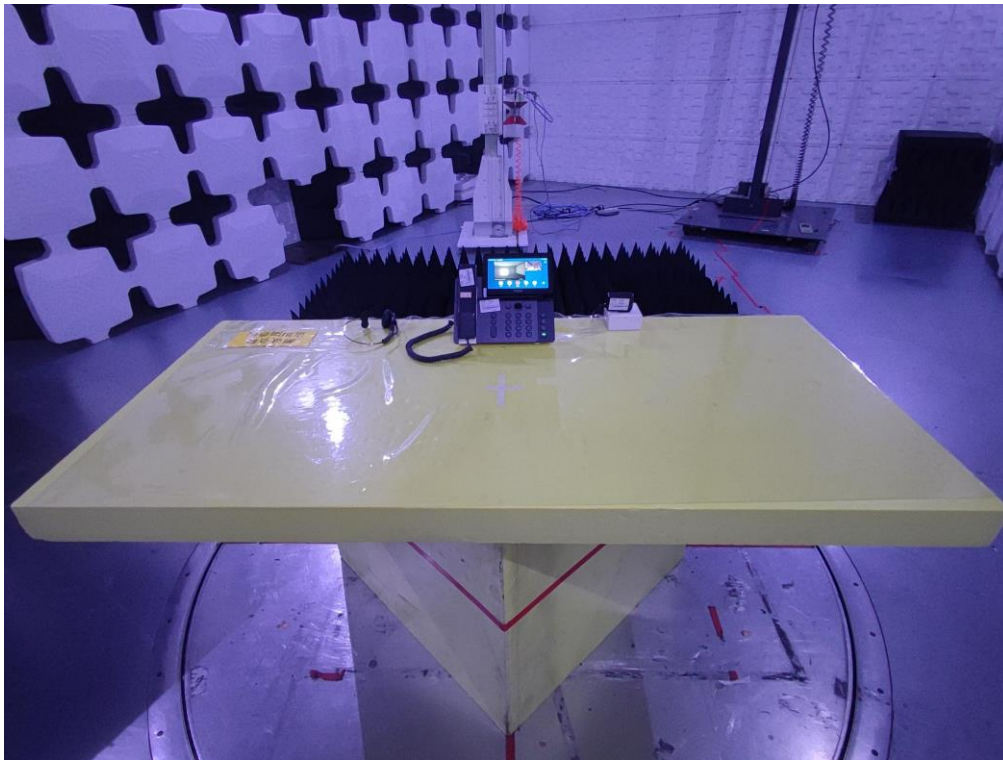

## Conducted emissions AC mains power port



## Asymmetric mode conducted emissions

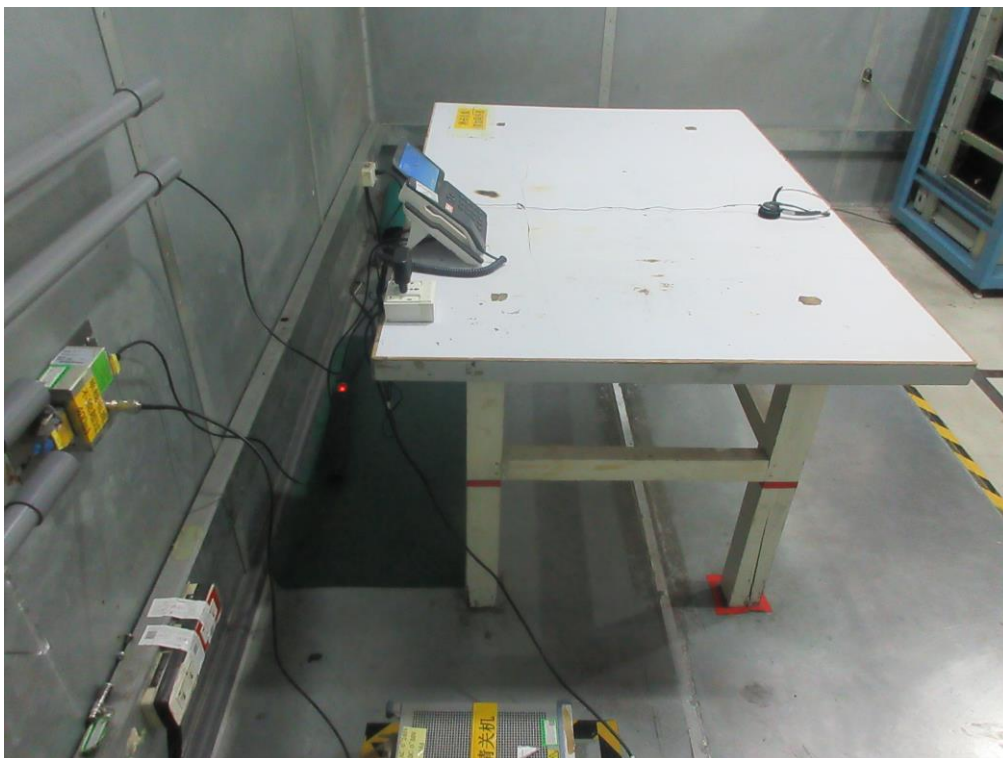

**End of Test Report**