




XonTel MS IP-PBX

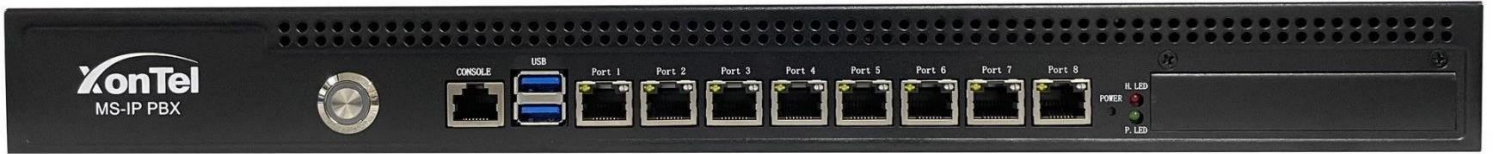

General features:

- Support Up to 1000 Extension Numbers.
- Support High Availability and Failover System (Optional).
- Built-in Firewall system for Protection.
- Support Recording system, Incoming and outgoing Calls.
- Full Details and Reports for all Calls.
- Voicemail for Each Number.
- Support Advance Call Center system (Optional).
- Extension on Mobile.
- Can be integrated with many Kinds of databases.
- Support for video-phones.
- Web-based operator panel.
- Call detail record (CDR) report.
- Distributed Dial Plan.
- Conference center with virtual rooms.
- SIP and IAX support.
- Voicemail-to-email functionality.
- Caller ID.
- Multiple trunk support.
- Incoming and outgoing routes with support for dial pattern matching.
- Support for follow-me.
- Support for ring groups.
- Support for paging and intercom.
- Support for time conditions.
- Support for PIN sets.
- DISA (Direct Inward System Access).
- Callback support.
- VoIP provider configuration.
- Support for call queues.
- Dynamically selecting routes by time segment
- Rerouting upon routing failure
- Selecting routes by sequence
- Supports dual security authentication: account password + terminal IP address
- Supports encrypted communication using the TLS or SRTP protocol.
- DND

| XonTel MS | |
|-----------------------|--|
| Extensions | Up to 1000 |
| Max Concurrent calls | 300 concurrent calls |
| Voicemail | Unlimited |
| Trunks | Unlimited |
| IVR | Unlimited |
| Protocol | SIP, IAX2 |
| Transport protocol | UDP, TCP, TLS |
| Encryption protocol | SRTP |
| Codec | G711 a/μ law, G722, OPUS, SILK, G72, G726, G729, GSM, iLBC, H261, H263, H263P, H264, VP8 |
| DTMF | In-band, RFC4733, RFC2833, SIP INFO, Auto |
| LAN | 8 × 10/100/1000Mbps |
| Firewall | Yes |
| T.38 Fax | Yes |
| Power Supply | 120V-220V, 88-264VAC |
| Power Consumption | <10W, 6A |
| Operating Temperature | -15°C - 60°C |
| Storage Temperature | -20°C - 80°C |
| Humidity | 0%-95% Relative Humidity, non-condensing |
| Dimension(W/D/H) | 42.8x35.1x4.4 CM |
| Weight | 5.4kg |
| Warranty | 1 Year |