




28 Ports Managed PoE+ Switch

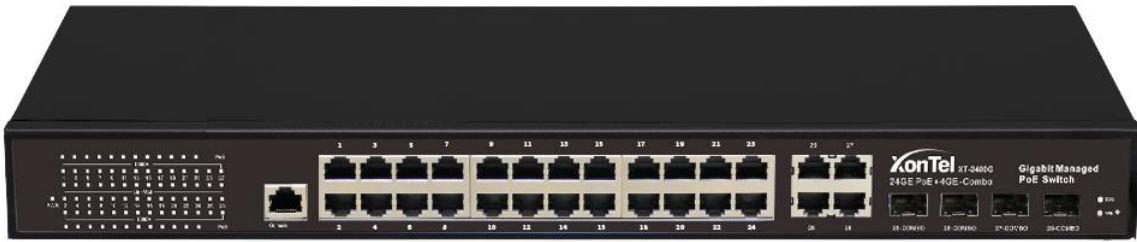

(XT-2400G PoE+)

The 28-ports Gigabit-managed PoE+ switch is a green energy-saving PoE+ switch independently developed by XonTel. It adopts high-quality and high-speed network IC and the most stable PoE+ chip. The PoE+ port meets the 802.3af or 802.3at standard. This model can provide seamless connection for 10/100/1000M Ethernet, and the PoE+ power port can automatically detect and power the powered devices that comply with the IEEE802.3af or IEEE802.3at standards. The non- PoE+ devices are forcibly powered and only transmit data.

Features

1. Can transfer data for network surveillance cameras
1. 24x 1000Mbps auto-sensing PoE+ ports, 4x 10/100/1000M Combo ports, 1 Console
2. Support IEEE802.3/IEEE802.3i/IEEE802.3uIEEE802.3ab/IEEE802.3z, IEEE802.3af/at, store-and-forward
3. Compatible with IEEE802.3at (30W) and IEEE802.3af (15.4w)
4. Ethernet port supports 10/100/1000M adaptive and PoE+ functions
5. Panel indicator monitoring the status and help failure analysis
6. Finless design, natural cooling, 1U rack mount
5. Support 802.1x port authentication, support AAA authentication, support TACACS+ authentication
6. Support WEB, TELNET, CLI, SSH, SNMP, RMON management
7. Support PoE+ power management
8. Support port lightning protection Surge: General Mode 6KV, Differential Mode 4KV, ESD 15KV.


Target Industries

- 1.HD monitor transmission and power supply
2. Wireless AP layout transmission and power supply
- 3.Network telephone transmission, intelligent house and home system
4. Intelligent transportation supervisory system (ITS)
5. High-speed Way supervisory/Tele-Communication System
6. Security protection system, TV medical treatment
7. Long-distance Multi-media Schooling, Campus monitoring
8. Long-distance broadcast television transmission system
9. High-building Security Protection, Military Tele-Com projects


● Physical Pic Reference



● Dimension(445mm*285mm*45mm,Net Weight:3.9kg/unit

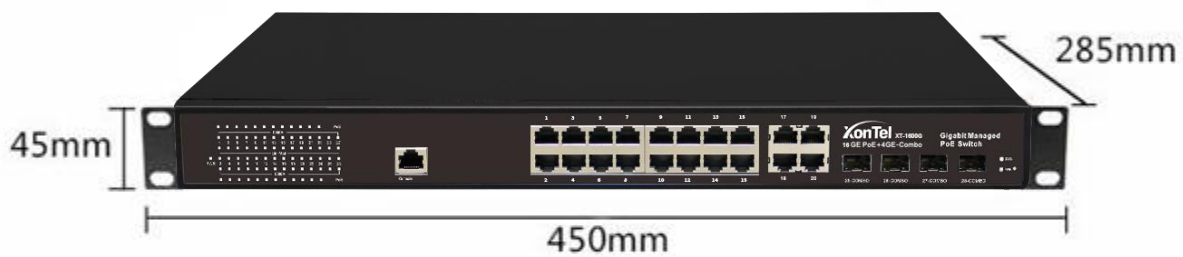

● Package Dimension(470mm*350mm*120mm,Gross Weight:4.5kg/unit

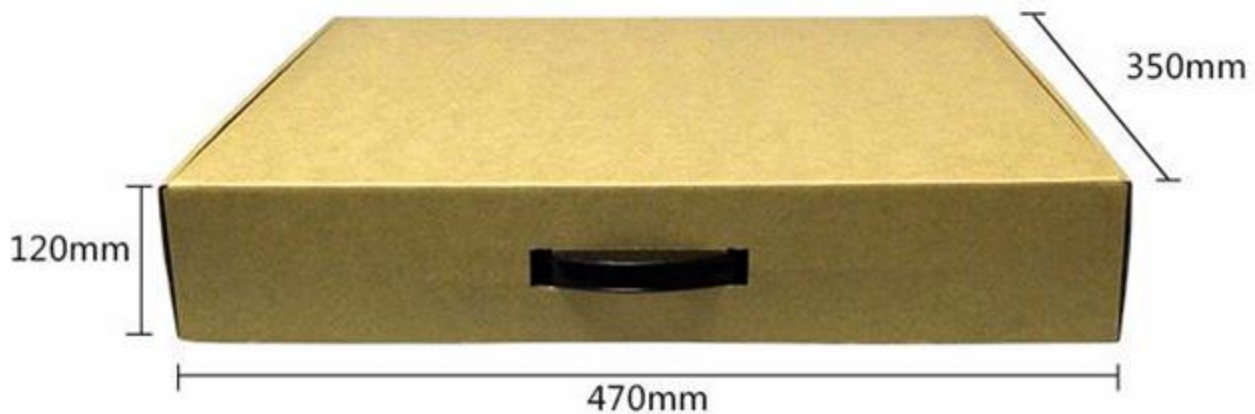

Technical parameter list

General Performance Indicator	
Product Name	28 Port Gigabit Managed PoE+ Switch
Product Model	XT-2400G
Interface	24*10/100/1000M PoE+ ports + 4 Gigabit SFP/TP Combo ports, 1 Console port
Network Protocols	IEEE 802.3 IEEE 802.3u IEEE 802.3ab/ad/az/af/at IEEE 802.3x IEEE 802.1q IEEE 802.1p, QoS IGMP Snooping
PoE+ Parameters	PoE+ Standard: IEEE802.3at (30W) and IEEE802.3af (15.4w)
	PoE+ compatibility: IEEE 802.3af/at adaptive
	PoE+ port output: DC48-55V
	Power Pin Assignment: Power over spare pairs 1/2(+) and 3/6 (-)
Network Transmission Medium	10BASE-T: Cat3, 4, 5 UTP (≤ 100 m) 100BASE-TX: UTP (≤ 100 m) above Cat5 1000BASE-TX: UTP (≤ 100 m) above Cat5
Optical	Multimode fiber: 1310nm, 2Km Single mode fiber: 1310nm, 20/40 Km 1550nm, 60/80/100/120Km
The LED indicator	SYS, PWR, Link (lines 2, 4) / Act (lines 1, 3)
Power Supply	Machine input voltage: AC110-264V; Output DC52V7.69A Total power: 400W
Physical Dimension	Product size (LxWxH): 445mmx 285mmx 45mm Package size (L x W x H): 470mm x 350mm x 120mm Product weight: 3.9kg Package weight: 4.5 kg
Working Environment	Operating Temperature: -20° ~ 55 ° C; Storage Temperature: -40 ° ~ 85 ° C; Operating Humidity: 10% ~ 95%, non-condensing Working height: up to 10,000 feet (3,000 meters) Storage height: up to 10,000 feet (3,000 meters)

Certification	CE, FCC, ROHS,3C
MTBF:	100,000 hours
Package Contents	<ol style="list-style-type: none"> 1. Switch: 1 set 2. Instruction manual: 1 3. Certificate of conformity: 1 4. AC power cord 1 5. A pair of hanging ears
Technical Indicators	
Bandwidth	64Gbps (non-blocking)
Packet Forwarding rate	64Mpps
Processor	RTL8382M
Flash Capacity	128M
Memory Capacity	256M
MAC	8K
Layer 2 Software Function	
Port Management	Enable/Disable Port
	Speed, Duplex, MTU Setting
	Flow-control
	Port Information Check
Port Mirroring	Supports both side-way port mirroring
Port Speed Limit	Supports port-based input / output bandwidth management
Port Isolation	Support the downlink port isolation, and can communicate with the uplink port
Storm Suppression	<p>Supports unknown unicast, multicast, unknown multicast, broadcast type storm suppression</p> <p>Storm suppression based on bandwidth regulation and storm filtering</p>
Link Aggregation	<p>Support static manual aggregation</p> <p>Support LACP dynamic aggregation</p>
VLAN	Access
	Trunk
	Hybrid
	Support port, protocol, MAC-based VLAN partitioning
	Support GVRP dynamic VLAN registration
	Voice VLAN

MAC	Support static addition, deletion
	MAC address learning limit
	Support dynamic aging time setting
Spanning tree	Support STP spanning tree protocol Supports RSTP Rapid Spanning Tree Protocol Supports MSTP Rapid Spanning Tree Protocol
Multicast	Support static addition, deletion IGMP-snooping
	Support MLD-Snooping
	Support v1/2/3 dynamic multicast monitor
DDM	Support SFP/SFP+DDM
Extended Function	
ACL	Based on source MAC, destination MAC, protocol type, source IP, destination IP, L4 port
Qos	Based on 802.1p (COS) classification
	Based on DSCP classification
	Classification based on source IP, destination IP, and port number
	Support SP, WRR scheduling strategy
	Support flow rate limit CAR
LLDP	Support LLDP link discovery protocol
User settings	Add/delete users
Log	User login, operation, status, events
Anti-attack	DOS defense
	Support CPU protection and limits the rate of sending cpu packets
	ARP binding (IP, MAC, PORT binding)
Certification	Support 802.1x port authentication
	Support AAA certification
Network diagnosis	Support ping, telnet, trace
System Management	Device reset, configuration save/restore, upgrade management, time setting, etc.
Management function	
CLI	Support serial port command line management
SSH	Support SSHv1/2 remote management
TELNET	Support telnet remote management
WEB	Support Layer 2 settings, Layer 2 and Layer 3 monitor
SNMP	SNMP V1/V2/V3
	Support trap: ColdStart, WarmStart, LinkDown, LinkUp
RMON	Support RMON v1
PoE+	Support PoE+ power supply
Other functions	Support DHCP Snooping, Option82

	Support dynamic ARP detection
	Support TACACS+ certification
	Support DNS certification
	Support port security settings
	Support MVR protocol
	Support cable detection VCT function
	Support UDLD protocol

Structure Diagram:

