


LIGHT SWITCH

INSTRUCTION




LT-03

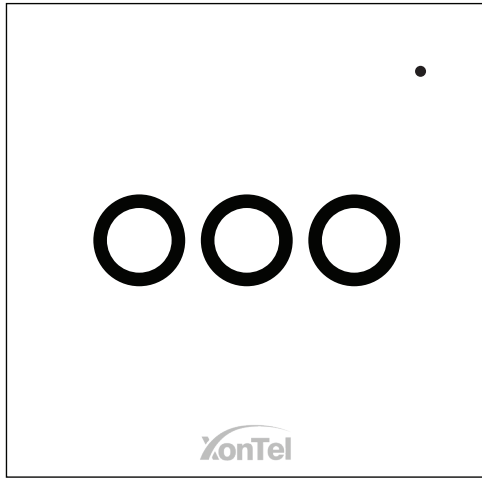

THANKS FOR
CHOOSING OUR WIFI SMART HOME SENSORS

Product Configuration

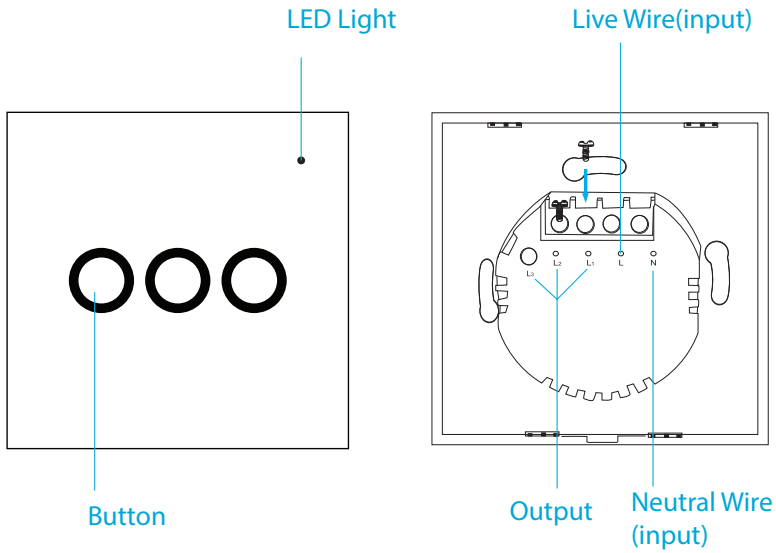

Specifications

Rated Voltage: AC 85-250V, 50/60Hz

Max Current: 3 outputs - Max 10A*3.

Wireless Type: 2.4GHz

Wireless Standard: IEEE 802.11b/g/n

Wireless Distance: 40m (max)

Operate Temper: 0°C ~ 40°C (32°F ~ 104°F)

Operating Humidity: 20% ~ 85% non-condensing

Storage Temper: 0°C ~ 60°C (32°F -140°F)

Storage Humidity: 0% ~ 90% non-condensing

Product Type: 3 Gangs

Product Size: 86mm(L) x 86mm(W) x 34mm(H)

Support: Amazon Alexa, Google Assistant

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	LED will rapidly blink, and OFF after scheduled time
Sleeping mode	Indicator OFF
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode

How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly. Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.



2. Register and Login




- Launch the "Smart life" app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.
- **Login if you have an account already.**

3. Add Device

- Power on the smart sensor which default's mode is Smart WiFi mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- **If the connecting fails, try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

What's the App User Interface Like ?

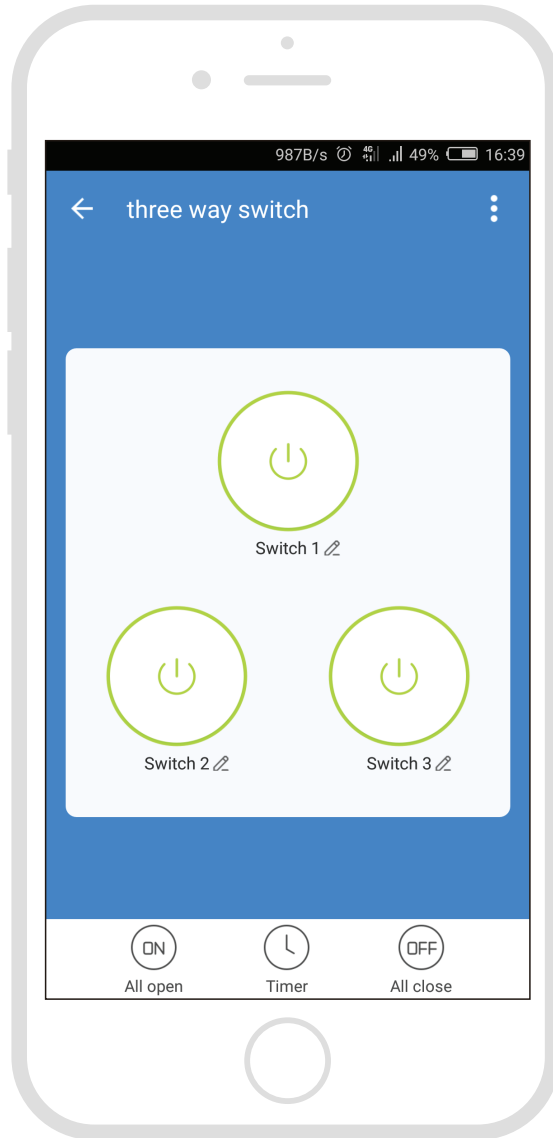

Smart life

Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main function

Working status: on/off: press one button only, the button in the app will turn to green when it is ON;

All on or All off: press the "All open" or "All close"

Timing switch, can be timed single or Multiple switch, and can set repeat cycle (30s delay)

Linkage alarm setting

To connect two Sensors via scene setting.

Device sharing

Allow others to control the device

Push notification

Open/close push notification

Remove device

Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter

