

CE EMC Test Report

Project No. : 1703C050B
Equipment : IP Phone
Brand Name : XonTel
Test Model : XT-30G
Series Model : N/A
Applicant : XonTel Technology Trd. Co. W.L.L
Address : Kuwait City , Qibla , Aladel Tower , F21 , state of Kuwait .
Manufacturer : XonTel Technology Trd. Co. W.L.L
Address : Kuwait City , Qibla , Aladel Tower , F21 , state of Kuwait .
Factory : XonTel Technology Trd. Co. W.L.L
Address : Kuwait City , Qibla , Aladel Tower , F21 , state of Kuwait .
Date of Receipt : Mar. 07, 2017
Apr. 17, 2020
Date of Test : Mar. 07, 2017 ~ Jun. 09, 2017
Issued Date : May 11, 2020
Report Version : R00
Test Sample : Engineering Sample No.: D170301747
Standard(s) : EN 55032:2015 Class B
EN 61000-3-2:2014 Class A
EN 61000-3-3:2013
EN 55024:2010+A1:2015

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Simon Ling

Prepared by : Simon Ling

Kevin Li

Approved by : Kevin Li



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	9
1.2 MEASUREMENT UNCERTAINTY	9
2 . GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 DESCRIPTION OF TEST MODES	12
2.3 EUT OPERATING CONDITIONS	14
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.5 DESCRIPTION OF SUPPORT UNITS	16
3 . EMC EMISSION TEST	17
3.1 RADIATED EMISSION	17
3.1.1 LIMITS	17
3.1.2 MEASUREMENT INSTRUMENTS LIST	19
3.1.3 TEST PROCEDURE	20
3.1.4 DEVIATION FROM TEST STANDARD	21
3.1.5 TEST SETUP	21
3.1.6 MEASUREMENT DISTANCE	22
3.1.7 TEST RESULTS (UP TO 1 GHZ)	23
3.1.8 TEST RESULTS (ABOVE 1 GHZ)	33
3.2 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS	43
3.2.1 LIMITS	43
3.2.2 MEASUREMENT INSTRUMENTS LIST	43
3.2.3 TEST PROCEDURE	44
3.2.4 DEVIATION FROM TEST STANDARD	44
3.2.5 TEST SETUP	44
3.2.6 TEST RESULTS	45
3.3 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST	53
3.3.1 LIMITS	53
3.3.2 MEASUREMENT INSTRUMENTS LIST	55
3.3.3 TEST PROCEDURE	55
3.3.4 DEVIATION FROM TEST STANDARD	55
3.3.5 TEST SETUP	56
3.3.6 TEST RESULTS	57
3.4 HARMONIC CURRENT EMISSIONS TEST	69
3.4.1 LIMITS	69
3.4.2 MEASUREMENT INSTRUMENTS LIST	69
3.4.3 TEST PROCEDURE	70

Table of Contents	Page
3.4.4 DEVIATION FROM TEST STANDARD	70
3.4.5 TEST SETUP	70
3.4.6 TEST RESULTS	71
3.5 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST	74
3.5.1 LIMITS	74
3.5.2 MEASUREMENT INSTRUMENTS LIST	74
3.5.3 TEST PROCEDURE	74
3.5.4 DEVIATION FROM TEST STANDARD	74
3.5.5 TESTSETUP	75
3.5.6 TEST RESULTS	76
4 . EMC IMMUNITY TEST	77
4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA	77
4.2 GENERAL PERFORMANCE CRITERIA	79
4.3 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)	80
4.3.1 TEST SPECIFICATION	80
4.3.2 MEASUREMENT INSTRUMENTS	80
4.3.3 TEST PROCEDURE	80
4.3.4 DEVIATION FROM TEST STANDARD	81
4.3.5 TEST SETUP	81
4.3.6 TEST RESULTS	82
4.4 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)	88
4.4.1 TEST SPECIFICATION	88
4.4.2 MEASUREMENT INSTRUMENTS	88
4.4.3 TEST PROCEDURE	88
4.4.4 DEVIATION FROM TEST STANDARD	88
4.4.5 TEST SETUP	89
4.4.6 TEST RESULTS	90
4.5 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)	123
4.5.1 TEST SPECIFICATION	123
4.5.2 MEASUREMENT INSTRUMENTS	123
4.5.3 TEST PROCEDURE	123
4.5.4 DEVIATION FROM TEST STANDARD	123
4.5.5 TEST SETUP	124
4.5.6 TEST RESULTS	125
4.6 SURGE IMMUNITY TEST	126
4.6.1 TEST SPECIFICATION	126
4.6.2 MEASUREMENT INSTRUMENTS	126
4.6.3 TEST PROCEDURE	127
4.6.4 DEVIATION FROM TEST STANDARD	127
4.6.5 TEST SETUP	127
4.6.6 TEST RESULTS	128

Table of Contents	Page
4.7 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY	
FIELDS TEST (CS)	129
4.7.1 TEST SPECIFICATION	129
4.7.2 MEASUREMENT INSTRUMENTS	129
4.7.3 TEST PROCEDURE	129
4.7.4 DEVIATION FROM TEST STANDARD	129
4.7.5 TEST SETUP	130
4.7.6 TEST RESULTS	131
4.8 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)	142
4.8.1 TEST SPECIFICATION	142
4.8.2 MEASUREMENT INSTRUMENTS	142
4.8.3 TEST PROCEDURE	142
4.8.4 DEVIATION FROM TEST STANDARD	142
4.8.5 TEST SETUP	143
4.8.6 TEST RESULTS	144
4.9 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY	
TEST	145
4.9.1 TEST SPECIFICATION	145
4.9.2 MEASUREMENT INSTRUMENTS	145
4.9.3 TEST PROCEDURE	145
4.9.4 DEVIATION FROM TEST STANDARD	145
4.9.5 TEST SETUP	146
4.9.6 TEST RESULTS	147
5 . EUT TEST PHOTO	148

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Compared with the previous report (BTL-EMC-1-1703C050), the brand, model name, applicant, manufacturer and factory information are changed which does not affect the test results, the rest are kept the same.	May 11, 2020

Remark: For the original report (BTL-EMC-1-1703C050), the test data, data evaluation, and equipment configuration contained was accredited by the Authority of TAF according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
EN 55032: 2015	Radiated emissions up to 1 GHz	Class B	PASS	-----
	Radiated emissions above 1 GHz	Class B	PASS	NOTE (2)
	Radiated emissions from FM receivers	-----	N/A	NOTE (1) NOTE (6)
	Conducted emissions AC mains power port	Class B	PASS	NOTE (7)
	Asymmetric mode conducted emissions	AAN	PASS	NOTE (1) NOTE (8)
		Current Probe	N/A	
		CVP	N/A	
	Conducted differential voltage emissions	-----	N/A	NOTE (1) NOTE (9)

Standard	Test Item	Limit	Judgment	Remark
EN 61000-3-2:2014	Harmonic current emissions	Class A	PASS	NOTE (3)
EN 61000-3-3:2013	Voltage changes, voltage fluctuations and flicker		PASS	

Immunity EN 55024: 2010+A1:2015				
Section(s)	Test Item	Performance Criterion	Judgment	Remark
EN 61000-4-2:2009	Electrostatic discharge immunity	B	PASS	
EN 61000-4-3: 2006+A1:2008+A2:2010	Radiated, radio-frequency, electromagnetic field immunity	A	PASS	
EN 61000-4-4:2012	Electrical fast transient/burst immunity	B	PASS	
EN 61000-4-5:2014	Surge immunity	B/C	PASS	NOTE (4)
EN 61000-4-6: 2014+AC :2015	Immunity to conducted disturbances, induced by radio-frequency fields	A	PASS	
EN 61000-4-8:2010	Power frequency magnetic field immunity	A	PASS	
EN 61000-4-11:2004	Voltage dips, short interruptions and voltage variations immunity	B / C / C	PASS	NOTE (5)

NOTE:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 1 GHz which does exceed 108 MHz, so the test will be performed.
- (3) If the power consumption is less than 75W, there is no limit applied.
- (4) Performance Criterion C for signal ports and telecommunication ports.
Performance Criterion B for input d.c. power port and a.c. power ports.
- (5) Voltage Dips: >95% reduction – Performance Criterion B
Voltage Dips: 30% reduction – Performance Criterion C
Voltage Interruptions: >95% reduction – Performance Criterion C
- (6) If the EUT has FM function the test will be performed.
- (7) If the EUT has AC power mains port the test will be performed.
- (8)

Cable Type	Number of pairs	Measurement type	Procedures
Balanced Unscreened	1 (2 wire) ;2 (4 wire); 3 (6 wire) ;4 (8 wire)	Voltage	AAN
Balanced Unscreened	See a)	Voltage and Current	CP+CVP
Screened or Coaxial	n/a	Voltage	AAN
Screened or Coaxial	n/a	Voltage or Current	CP or CVP
Unbalanced cables	n/a	Voltage and Current	CP+CVP

Ports connected to cables with more than 4 balanced pairs or where the port is unable to function correctly when connected through an AAN.

- (9) If the EUT has tuner port the test will be performed.
- (10) The requirement followed by the client's specification.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2, The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Radiated emissions up to 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB08 (10m)	CISPR	30MHz ~ 200MHz	V	4.66
		30MHz ~ 200MHz	H	4.64
		200MHz ~ 1,000MHz	V	4.88
		200MHz ~ 1,000MHz	H	4.86

B. Radiated emissions above 1 GHz measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-CB08 (3m)	CISPR	1 ~ 6 GHz	4.26
		6 ~ 18 GHz	5.30

C. Conducted Emissions AC Mains Power Port Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

D. Asymmetric Mode Conducted Emissions Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	AAN 50...40dB	3.76
		AAN 65...50dB	3.76
		AAN 75...60dB	3.76
		Capacitive Voltage Probe	3.04
		RF Current Probe	2.58

E. Harmonic current emissions / Voltage changes, voltage fluctuations and flicker measurement:

Test Site	Method	Item	U (%)
DG-C01	EN 61000-3-2	Voltage	0.774
	EN 61000-3-3	Current	0.782

F. Immunity Measurement:

Test Site	Method	Item	U
DG-SR02	EN 61000-4-2	Voltage(2kV/4kV/6kV/8kV/15kV/25kV/30kV)	1.0%
		Peak Current	6.0%
		30/60ns Current	6.0%
		Rise time	6.4%
DG-CB05	EN 61000-4-3	80MHz~1GHz	2.175 dB
DG-SR05	EN 61000-4-4	Impulse Voltage	4.0 %
		Impulse Rise Time	4.5 %
		Impulse duration Time	4.0 %
DG-SR05	EN 61000-4-5	Impulse Voltage	4.0 %
		Impulse Rise Time	4.5 %
		Impulse duration Time	4.0 %
DG-CB06	EN 61000-4-6	CDN: 150kHz~230MHz	2.509 dB
		EM Clamp: 150kHz~230MHz	3.094 dB
DG-SR05	EN 61000-4-8	Magnetic Field Level	3 %
DG-SR05	EN 61000-4-11	Impulse Amplitude	4 %
		Timing	3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	IP Phone
Brand Name	XonTel
Test Model	XT-30G
Series Model	N/A
Model Difference	N/A
Power Source	1. Supplied from PoE. 2. DC Voltage supplied from AC adapter. Model: F12US1200100A/F12DE1200100A Manufactuer: Shenzhen Sunlight Electronic
Power Rating	1. 12V --- 1.0A 2. I/P: AC100-240V 50/60Hz 0.5A max O/P: 12V --- 1.0A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Handfree+vedio+HDMI out (PoE)
Mode 2	Handfree+vedio+HDMI out (Adapter)
Mode 3	Handset+vedio+HDMI out (Adapter)
Mode 4	Earphone+vedio+HDMI out(Adapter)
Mode 5	Play vedio+storage R/W+HDMI out(Adapter)
Mode 6	PC Port 1Gbps
Mode 7	PC Port 100Mbps
Mode 8	PC Port 10Mbps
Mode 9	Internet Port 1Gbps
Mode 10	Internet Port 100Mbps
Mode 11	Internet Port 10Mbps

For Radiated Test	
Final Test Mode	Description
Mode 1	Handfree+vedio+HDMI out (PoE)
Mode 2	Handfree+vedio+HDMI out (Adapter)
Mode 3	Handset+vedio+HDMI out (Adapter)
Mode 4	Earphone+vedio+HDMI out(Adapter)
Mode 5	Play vedio+storage R/W+HDMI out(Adapter)

For Conducted Test	
Final Test Mode	Description
Mode 2	Handfree+vedio+HDMI out (Adapter)
Mode 3	Handset+vedio+HDMI out (Adapter)
Mode 4	Earphone+vedio+HDMI out(Adapter)
Mode 5	Play vedio+storage R/W+HDMI out(Adapter)

For ISN Test	
Final Test Mode	Description
Mode 6	PC Port 1Gbps
Mode 7	PC Port 100Mbps
Mode 8	PC Port 10Mbps
Mode 9	Internet Port 1Gbps
Mode 10	Internet Port 100Mbps
Mode 11	Internet Port 10Mbps


For Harmonics / Flicks Test	
Final Test Mode	Description
Mode 2	Handfree+vedio+HDMI out (Adapter)

For EMS Test	
Final Test Mode	Description
Mode 1	Handfree+vedio+HDMI out (PoE)
Mode 2	Handfree+vedio+HDMI out (Adapter)
Mode 3	Handset+vedio+HDMI out (Adapter)
Mode 4	Earphone+vedio+HDMI out(Adapter)
Mode 5	Play vedio+storage R/W+HDMI out(Adapter)


2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

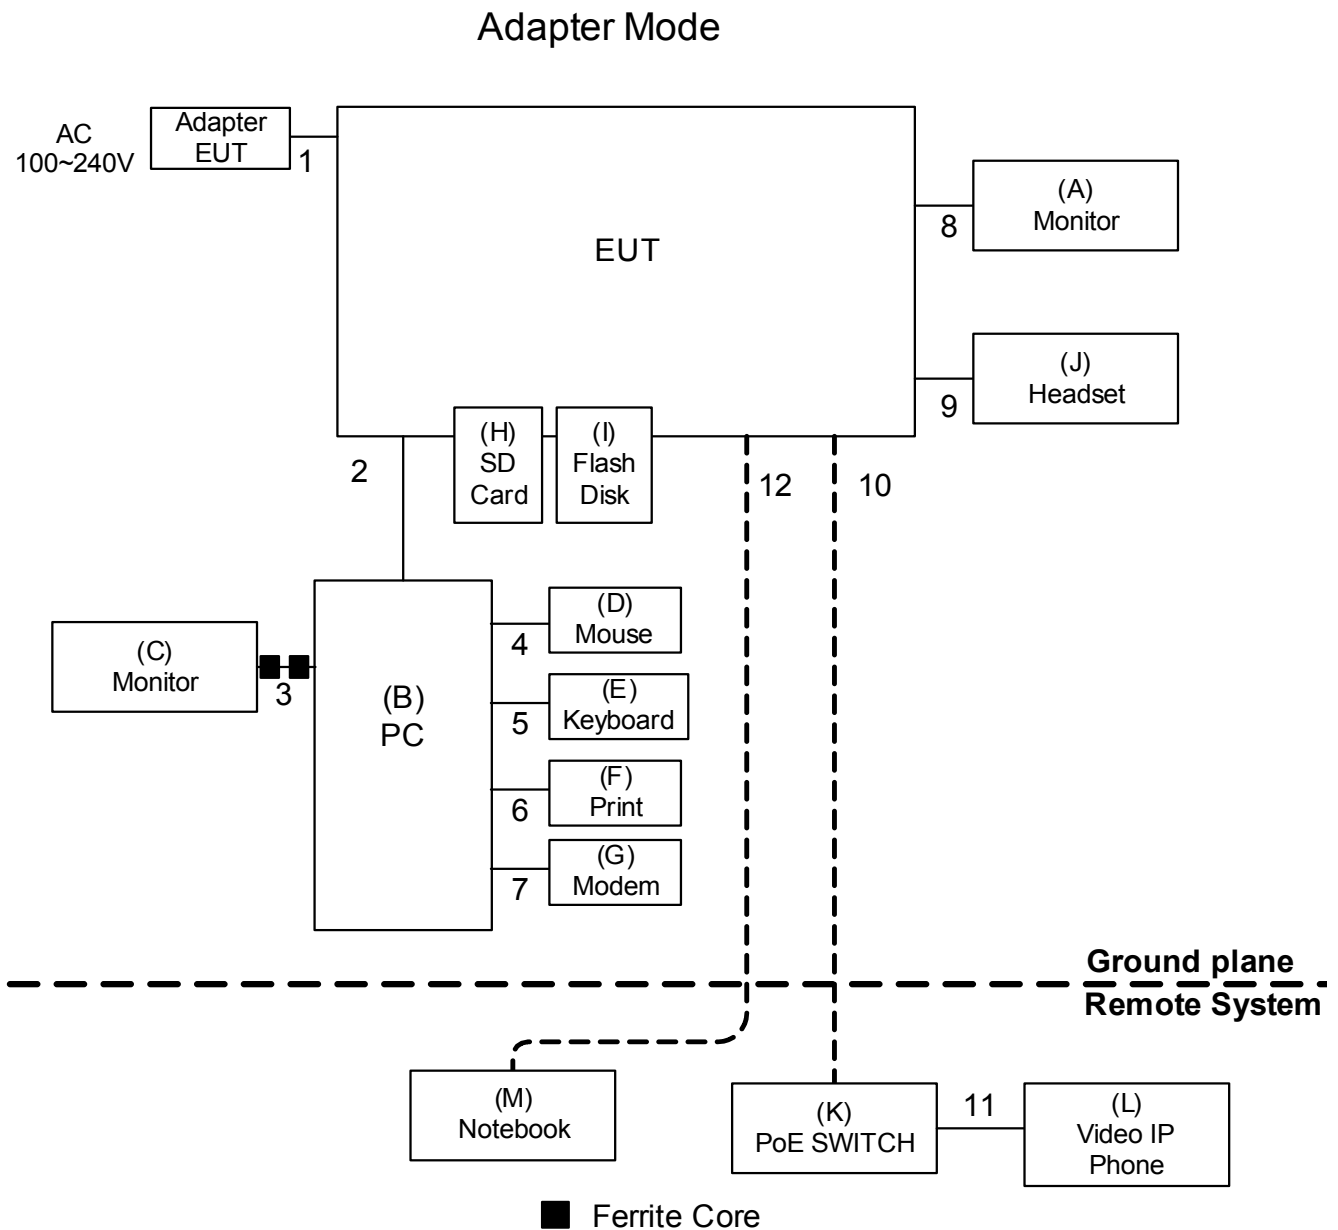

PoE Mode

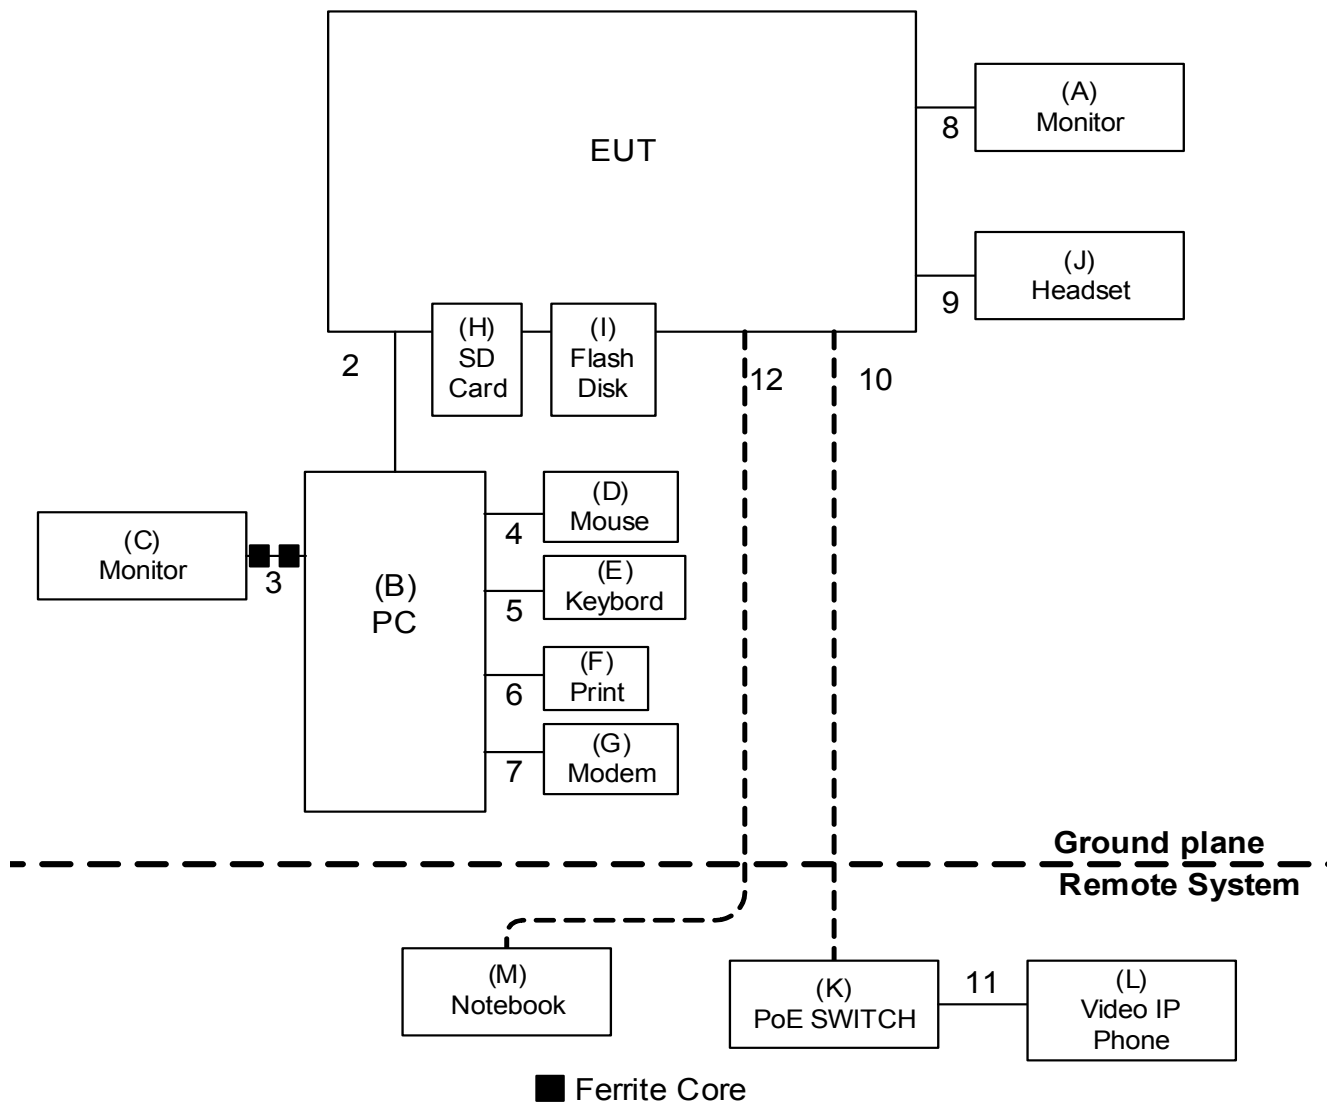

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Monitor	DELL	U2410	CN-08ZWXD-83205-76D-0W9L
B	PC	DELL	VOSTRO 470	17923815829
C	LCD Monitor	DELL	E177FPc	CNOFJ179-64180-6AG-1WNS
D	USB Mouse	DELL	MO56UOA	FQJ000BS
E	USB Keyboard	DELL	L100	CNORH6596589071T08NE
F	Printer	SII	DPU-414	Printer
G	Modem	ACEEX	DM-1414V	Modem
H	SD Card	SanDisk	4GB	N/A
I	USB Flash Disk	Kingston	DT101G2/8G	93JB5-N88CUW-3VFK0
J	Headset	Xontel	A310QD	N/A
K	PoE SWITCH	Dlik	DGS-1008P	N/A
L	Vedio IP Phone	Xontel	F600	N/A
M	Notebook	Lenovo	E46L	EB21809870

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.8m
2	USB Cable	YES	NO	0.5m
3	D-SUB Cable	YES	YES	1.8m
4	USB Cable	YES	NO	1.8m
5	USB Cable	YES	NO	1.8m
6	Paraller Cable	YES	NO	1.5m
7	RS232 Cable	YES	NO	1.5m
8	HDMI Cable	YES	NO	1.8m
9	RJ11 Cable	NO	NO	1.8m
10	RJ45 Cable	NO	NO	15m
11	RJ45 Cable	NO	NO	1m
12	RJ45 Cable	NO	NO	15m

3. EMC EMISSION TEST

3.1 RADIATED EMISSION

3.1.1 LIMITS

Class A equipment up to 1000MHz

Table clause	Frequency range MHz	Measurement			Class A limits dB(μV/m)
		Facility (see Table A.1)	Distance m	Detector type/ bandwidth	
A2.1	30-230	OATS/SAC	10	Quasi peak / 120 kHz	40
	230-1000				47
A2.2	30-230	OATS/SAC	3		50
	230-1000				57
A2.3	30-230	FAR	10	Quasi peak / 120 kHz	42 to 35
	230-1000				42
A2.4	30-230	FAR	3		52 to 45
	230-1000				52
Apply only A2.1 or A2.2 or A2.3 or A2.4 across the entire frequency range.					

Class A equipment above 1000MHz

Table clause	Frequency range MHz	Measurement			Class A limits dB(μV/m)
		Facility (see Table A.1)	Distance m	Detector type/bandwidth	
A3.1	1000-3000	FSOATS	3	Average / 1 MHz	56
	3000-6000				60
A3.2	1000-3000			Peak / 1 MHz	76
	3000-6000				80
Apply A3.1 and A3.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.					

Class B equipment up to 1000MHz

Table clause	Frequency range MHz	Measurement			Class B limits dB(μV/m)
		Facility (see Table A.1)	Distance m	Detector type/ bandwidth	
A4.1	30-230	OATS/SAC	10	Quasi peak / 120 kHz	30
	230-1000				37
A4.2	30-230	OATS/SAC	3		40
	230-1000				47
A4.3	30-230	FAR	10	Quasi peak / 120 kHz	32 to 25
	230-1000				32
A4.4	30-230	FAR	3		42 to 35
	230-1000				42

Apply only table clause A4.1 or A4.2 or A4.3 or A4.4 across the entire frequency range. These requirements are not applicable to the local oscillator and harmonics frequencies of equipment covered by Table A.6.

Class B equipment above 1000MHz

Table clause	Frequency range MHz	Measurement			Class B limits dB(μ V/m)
		Facility (see Table A.1)	Distance m	Detector type/bandwidth	
A5.1	1000-3000	FSOATS	3	Average / 1 MHz	50
	3000-6000				54
A5.2	1000-3000			Peak / 1 MHz	70
	3000-6000				74

Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

Notes:

- (1) The limit for radiated test was performed according to as following: EN 55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Required highest frequency for radiated measurement

Highest internal frequency (F_x) MHz	Highest measured frequency MHz
$F_x \leq 108$	1000
$108 < F_x \leq 500$	2000
$500 < F_x \leq 1000$	5000
$F_x > 1000$	5 th up to a maximum 6 GHz,

Note for FM and TV broadcast receiver, F_x is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

3.1.2 MEASUREMENT INSTRUMENTS LIST

Up to 1GHz:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pre-Amplifier	Mini-Circuits	EMC 9135	980284	Mar. 26, 2018
2	Pre-Amplifier	Mini-Circuits	EMC 9135	980283	Mar. 26, 2018
3	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	586	Mar. 26, 2018
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	587	Mar. 26, 2018
5	Cable	emci	LMR-400(5m +11m+15m)	N/A	Dec. 27, 2017
6	Cable	emci	LMR-400(5m +8m+15m)	N/A	Dec. 27, 2017
7	Measurement Software	Farad	EZ-EMC Ver.BTL-2A NT-1	N/A	N/A
8	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
9	Attenuator	N/A	SA18N-06	6dB	Apr. 14, 2018
10	Attenuator	N/A	SA18N-06	6dB	Apr. 14, 2018
11	Receiver	Keysight	N9038A	MY54450004	Sep. 04, 2017
12	MXE EMI Receiver	Agilent	N9038A	MY53220133	Jun. 23, 2017

Above 1GHz:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Horn Antenna	EMCO	3115	9605-4803	Mar. 26, 2018
2	Amplifier	Agilent	8449B	3008A02584	Sep. 04, 2017
3	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
4	Measurement Software	Farad	EZ-EMC Ver.BTL-2ANT-1	N/A	N/A
5	Cable	emci	SUCOFLEX_1 5m_5m(0.01G Hz – 26.5GHz)	N/A	Dec. 27, 2017
6	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
7	Controller	MF	MF-7802	MF780208159	N/A
8	Cable	emci	SUCOFLEX 102_8m(0.01G Hz – 40GHz)	N/A	Mar. 27, 2018

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.

3.1.3 TEST PROCEDURE


- a. The measuring distance of 10 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz).
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1GHz)
- f. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- g. For the actual test configuration, please refer to the related Item - Block Diagram of system tested.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation


3.1.5 TEST SETUP

UP TO 1 GHZ

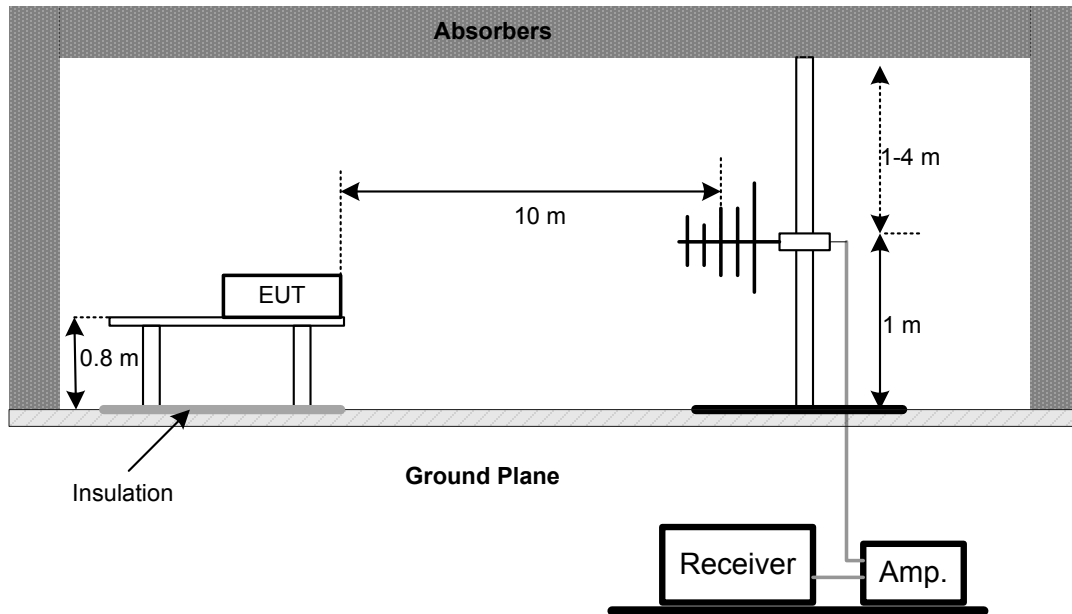


Note: The antenna can be moved between 1 to 4 meters above the ground.

ABOVE 1 GHZ

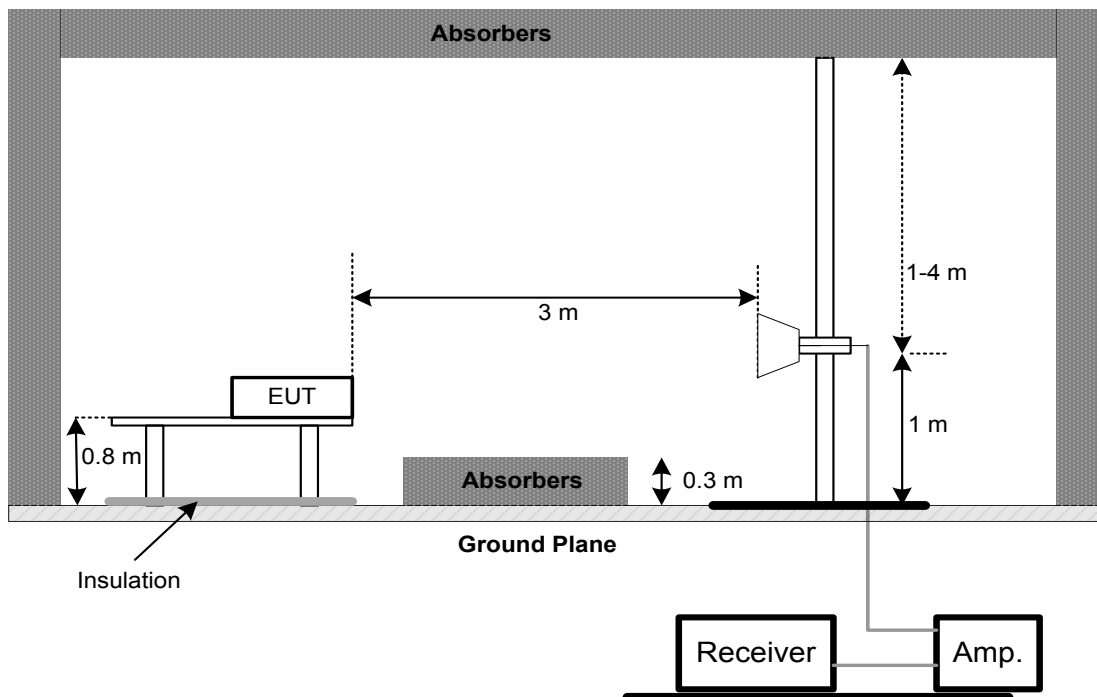

3.1.6 MEASUREMENT DISTANCE

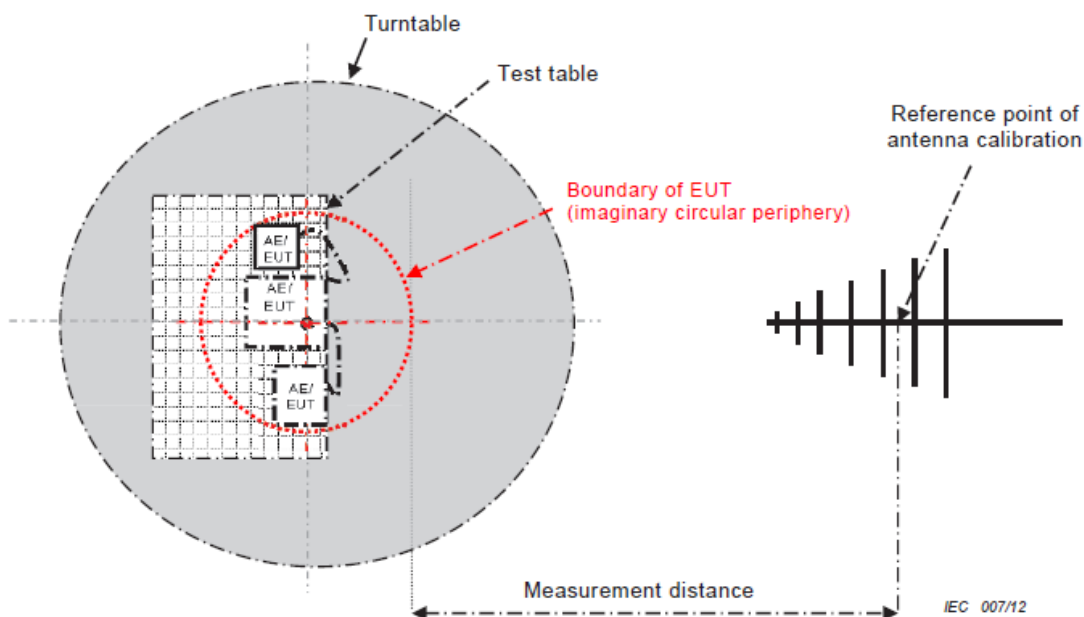

– 34 –

CISPR 32 © IEC:2012


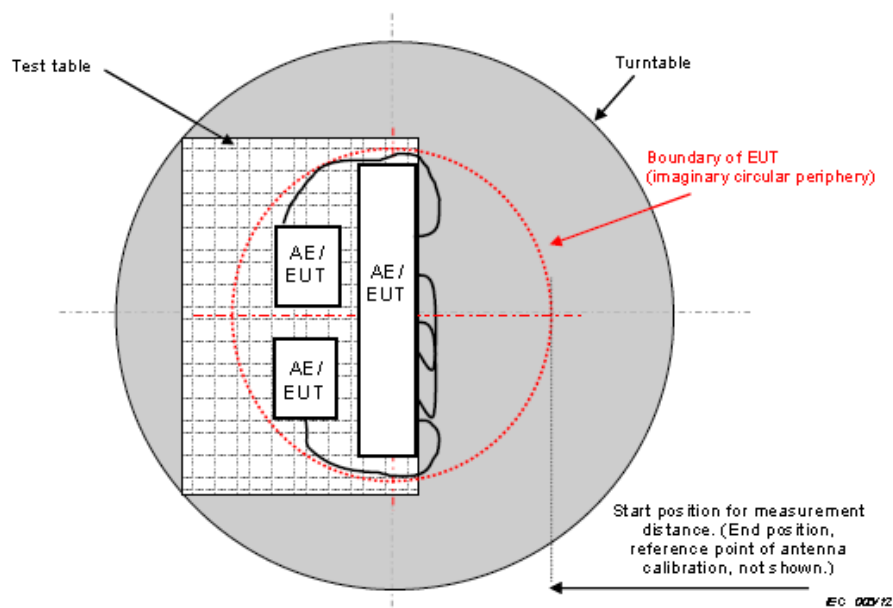


Figure C.2 – Boundary of EUT, Local AE and associated cabling

3.1.7 TEST RESULTS (UP TO 1 GHZ)


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handfree+vedio+HDMI out (PoE)		
Test Engineer	Simon Ling		

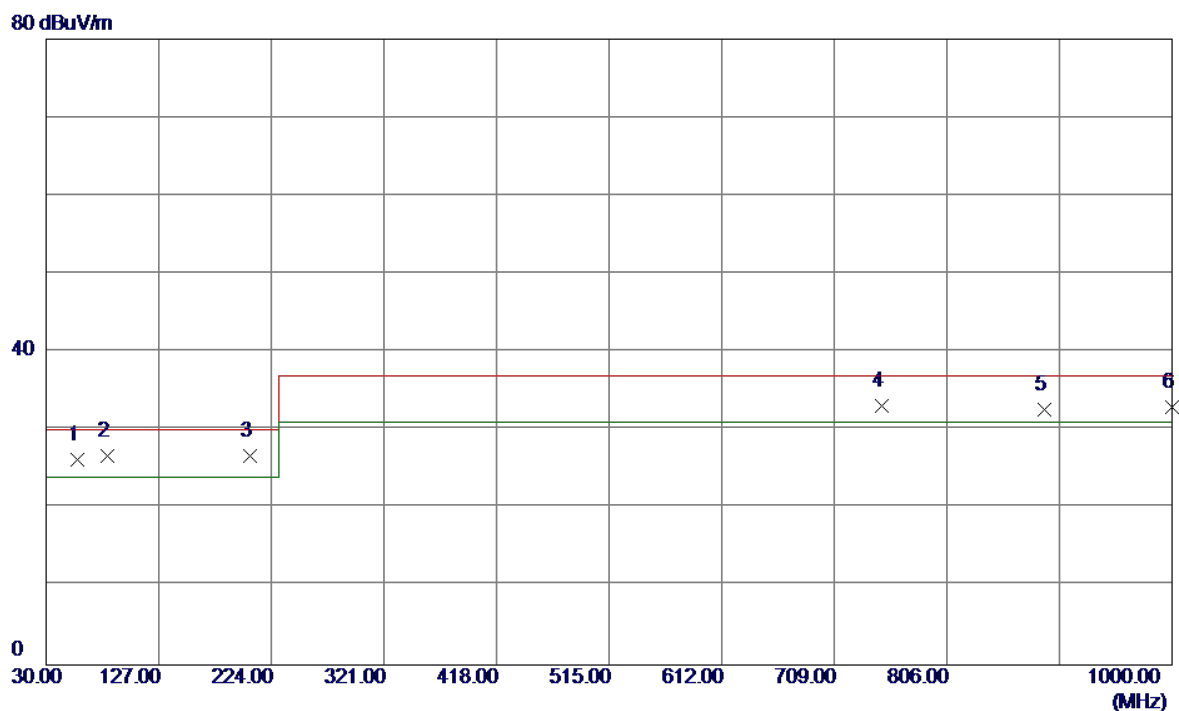

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.6750	38.79	-12.62	26.17	30.00	-3.83	QP
2	82.8650	43.16	-16.46	26.70	30.00	-3.30	QP
3 *	205.5700	40.64	-13.90	26.74	30.00	-3.26	QP
4	750.2250	33.94	-0.86	33.08	37.00	-3.92	QP
5	890.3900	31.17	1.47	32.64	37.00	-4.36	QP
6	1000.0000	29.10	3.93	33.03	37.00	-3.97	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handfree+vedio+HDMI out (PoE)		
Test Engineer	Simon Ling		


80 dBuV/m

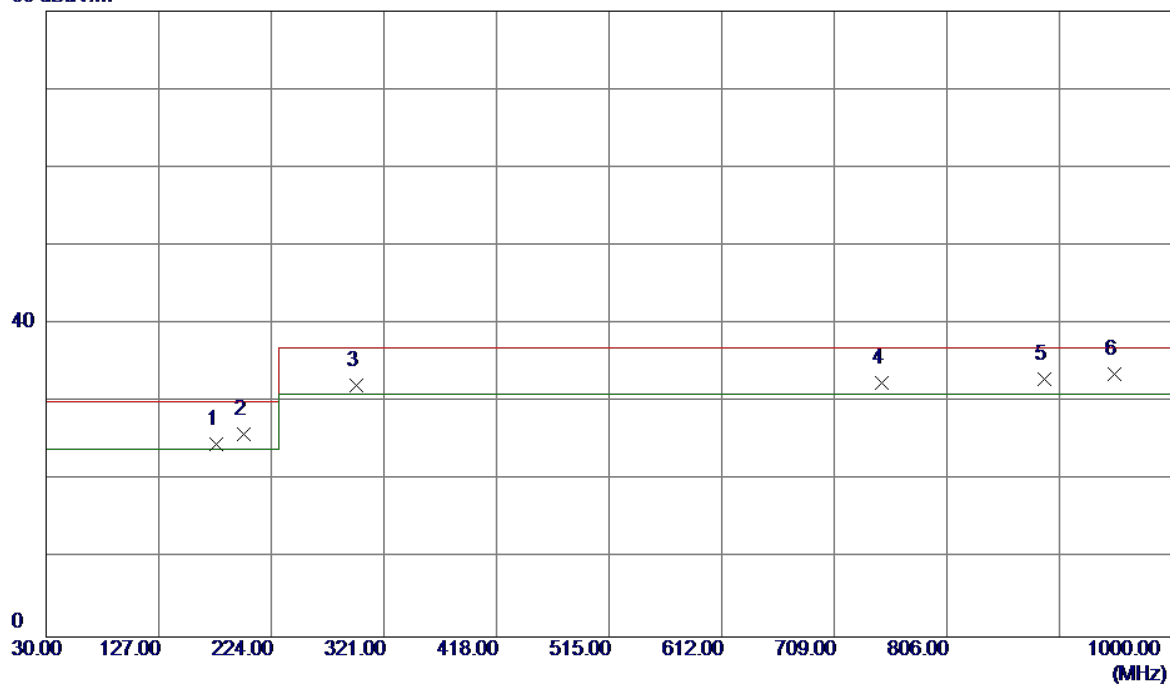

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	176.9550	36.35	-11.71	24.64	30.00	-5.36	QP
2	200.0350	39.62	-13.64	25.98	30.00	-4.02	QP
3	297.2349	42.11	-9.95	32.16	37.00	-4.84	QP
4	750.2250	33.32	-0.86	32.46	37.00	-4.54	QP
5	890.3900	31.43	1.47	32.90	37.00	-4.10	QP
6 *	950.0450	30.39	3.21	33.60	37.00	-3.40	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

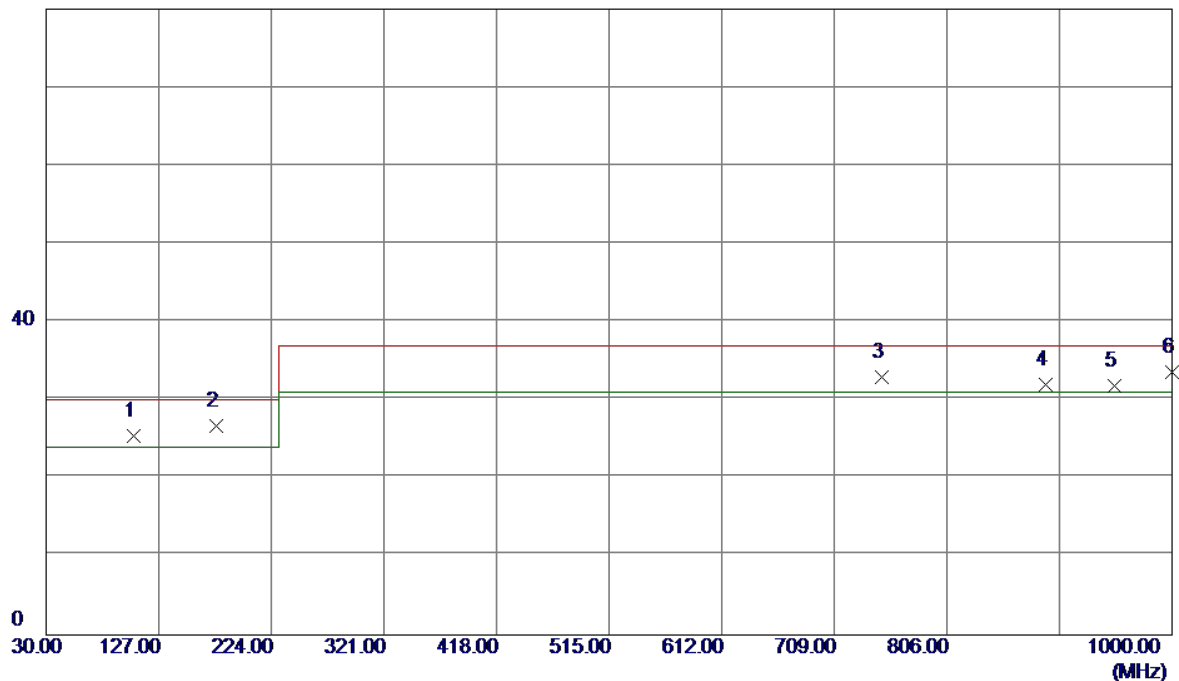

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	105.5990	39.55	-14.16	25.39	30.00	-4.61	QP
2 *	176.4700	38.35	-11.64	26.71	30.00	-3.29	QP
3	750.2250	33.89	-0.86	33.03	37.00	-3.97	QP
4	890.8750	30.52	1.48	32.00	37.00	-5.00	QP
5	950.0450	28.68	3.21	31.89	37.00	-5.11	QP
6	1000.0000	29.60	3.93	33.53	37.00	-3.47	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

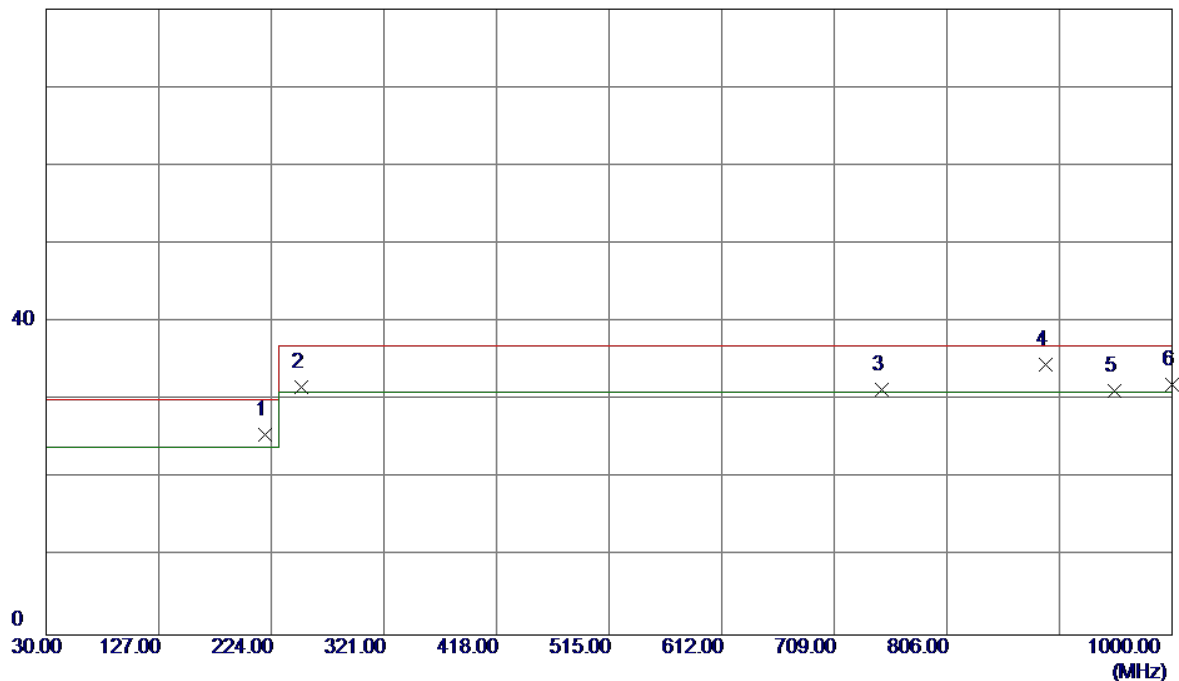

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	218.1800	39.59	-13.99	25.60	30.00	-4.40	QP
2	250.1900	44.94	-13.33	31.61	37.00	-5.39	QP
3	750.2250	32.27	-0.86	31.41	37.00	-5.59	QP
4 *	890.8750	33.13	1.48	34.61	37.00	-2.39	QP
5	950.0450	27.96	3.21	31.17	37.00	-5.83	QP
6	1000.0000	28.09	3.93	32.02	37.00	-4.98	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

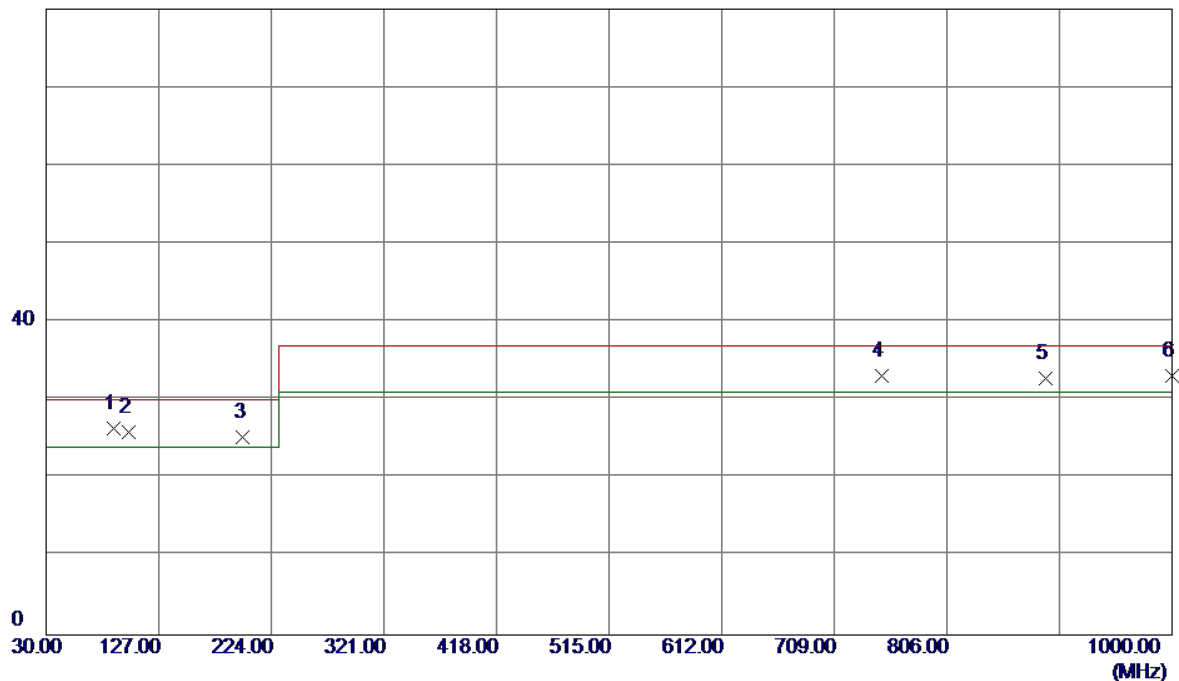

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	88.1725	42.68	-16.34	26.34	30.00	-3.66	QP
2	100.8100	40.38	-14.48	25.90	30.00	-4.10	QP
3	199.7500	38.93	-13.63	25.30	30.00	-4.70	QP
4	750.2250	33.96	-0.86	33.10	37.00	-3.90	QP
5	890.8750	31.25	1.48	32.73	37.00	-4.27	QP
6	1000.0000	29.18	3.93	33.11	37.00	-3.89	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

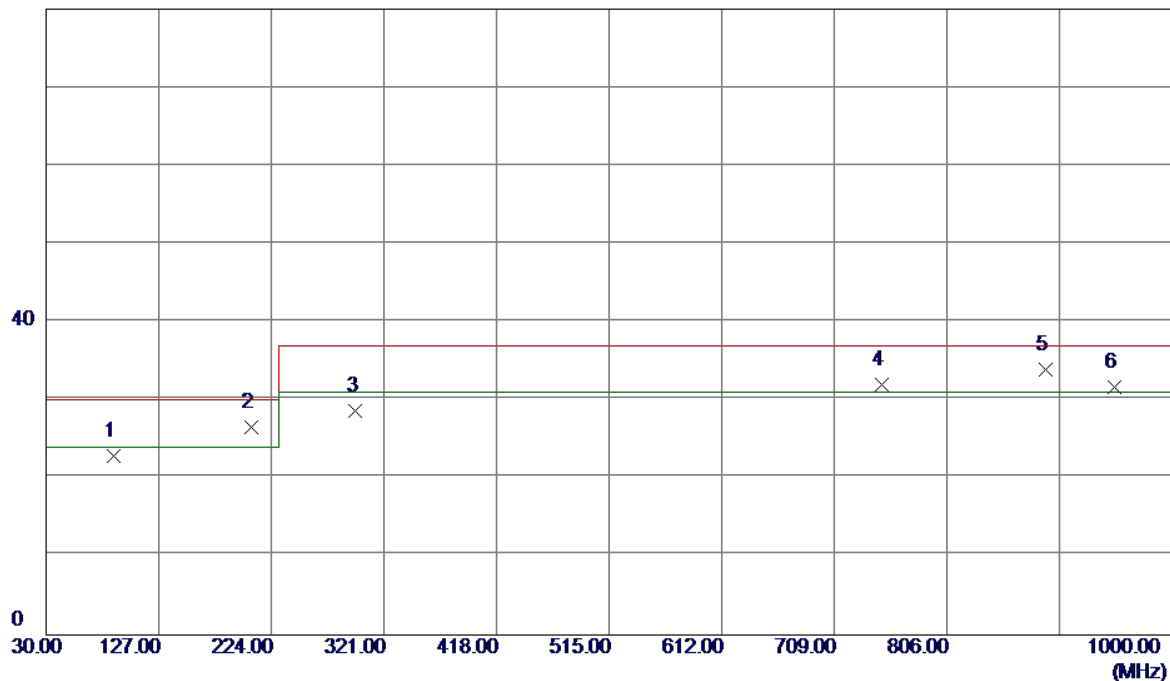

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	88.2000	39.24	-16.34	22.90	30.00	-7.10	QP
2	206.5399	40.57	-13.94	26.63	30.00	-3.37	QP
3	296.7500	38.55	-9.95	28.60	37.00	-8.40	QP
4	750.2250	32.88	-0.86	32.02	37.00	-4.98	QP
5 *	890.8750	32.45	1.48	33.93	37.00	-3.07	QP
6	950.0450	28.45	3.21	31.66	37.00	-5.34	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

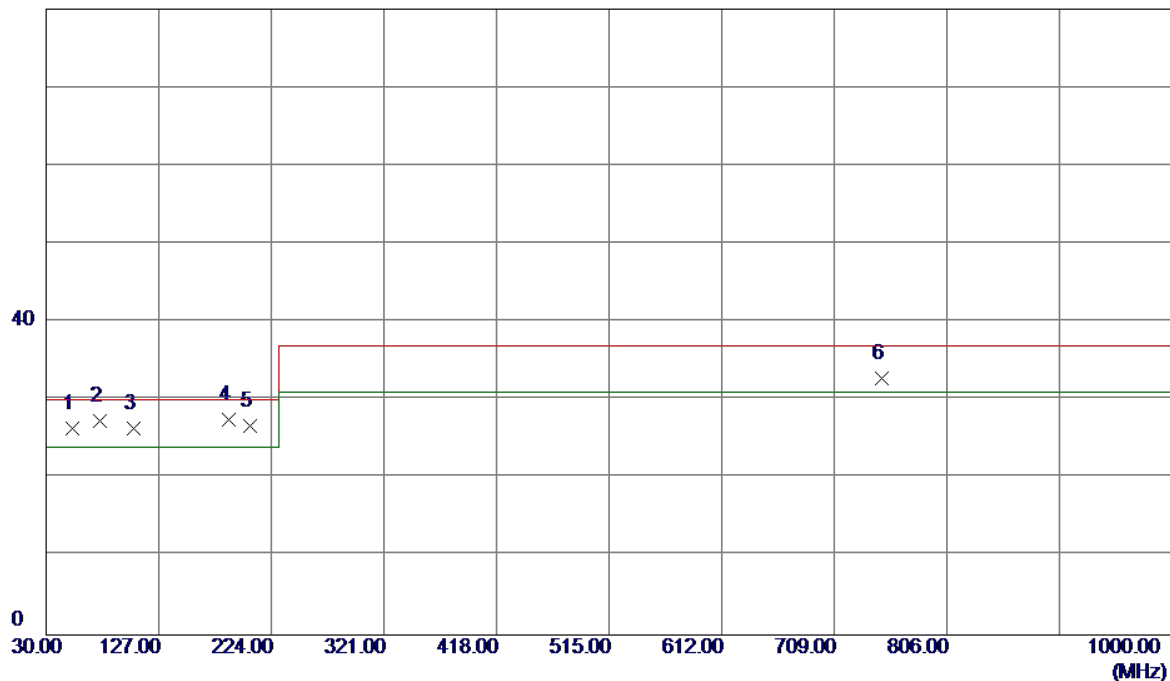

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	52.7950	38.77	-12.39	26.38	30.00	-3.62	QP
2	76.0750	43.72	-16.31	27.41	30.00	-2.59	QP
3	105.6600	40.49	-14.15	26.34	30.00	-3.66	QP
4 *	187.6250	40.46	-12.95	27.51	30.00	-2.49	QP
5	206.0549	40.70	-13.92	26.78	30.00	-3.22	QP
6	750.2250	33.66	-0.86	32.80	37.00	-4.20	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

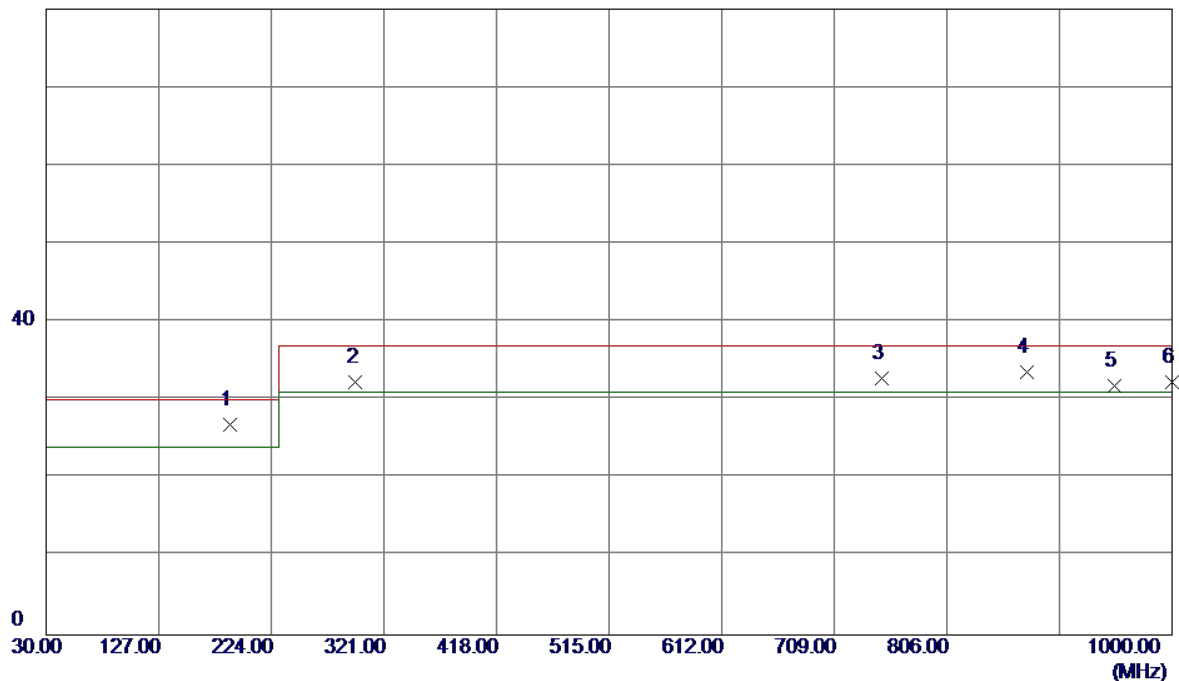

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	188.5950	39.96	-13.05	26.91	30.00	-3.09	QP
2	296.7500	42.32	-9.95	32.37	37.00	-4.63	QP
3	750.2250	33.64	-0.86	32.78	37.00	-4.22	QP
4	874.8700	32.53	1.13	33.66	37.00	-3.34	QP
5	950.0450	28.64	3.21	31.85	37.00	-5.15	QP
6	1000.0000	28.45	3.93	32.38	37.00	-4.62	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

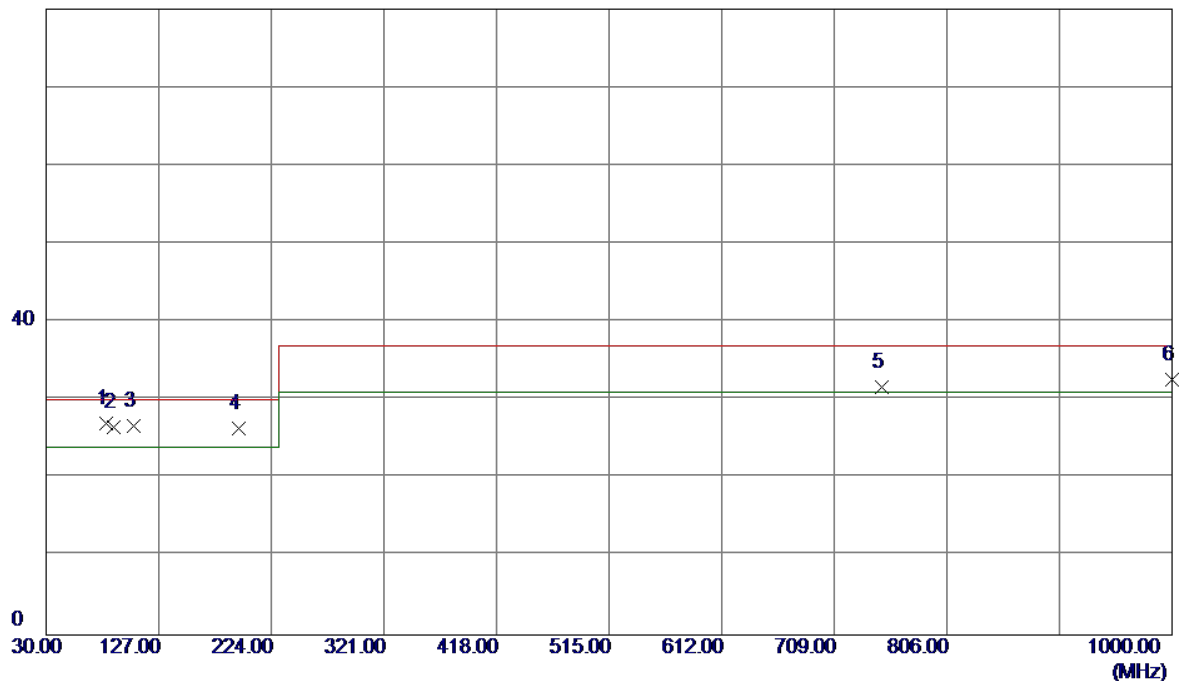

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	81.8949	43.62	-16.56	27.06	30.00	-2.94	QP
2	87.9860	42.85	-16.33	26.52	30.00	-3.48	QP
3	105.6600	40.81	-14.15	26.66	30.00	-3.34	QP
4	196.3550	39.93	-13.48	26.45	30.00	-3.55	QP
5	750.2250	32.48	-0.86	31.62	37.00	-5.38	QP
6	1000.0000	28.75	3.93	32.68	37.00	-4.32	QP

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		

80 dBuV/m

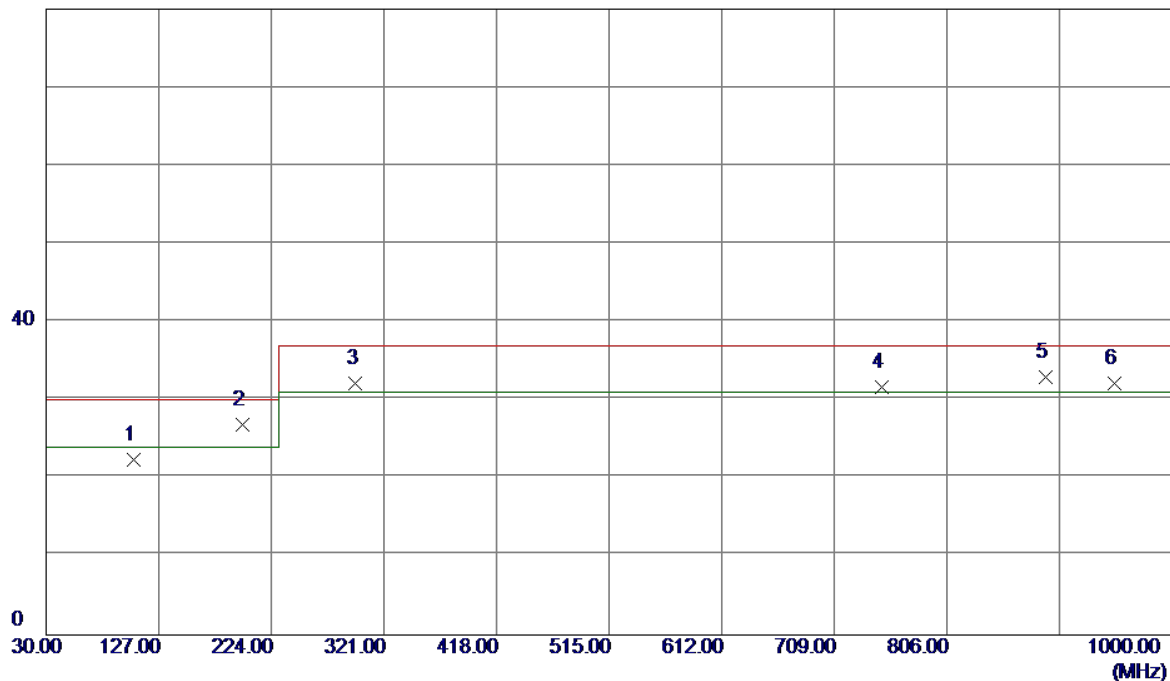


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	105.6600	36.62	-14.15	22.47	30.00	-7.53	QP
2 *	199.2650	40.42	-13.61	26.81	30.00	-3.19	QP
3	296.7500	42.14	-9.95	32.19	37.00	-4.81	QP
4	750.2250	32.47	-0.86	31.61	37.00	-5.39	QP
5	890.8750	31.47	1.48	32.95	37.00	-4.05	QP
6	950.0450	28.92	3.21	32.13	37.00	-4.87	QP

3.1.8 TEST RESULTS (ABOVE 1 GHZ)

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handfree+vedio+HDMI out (PoE)		
Test Engineer	Simon Ling		


80 dBuV/m

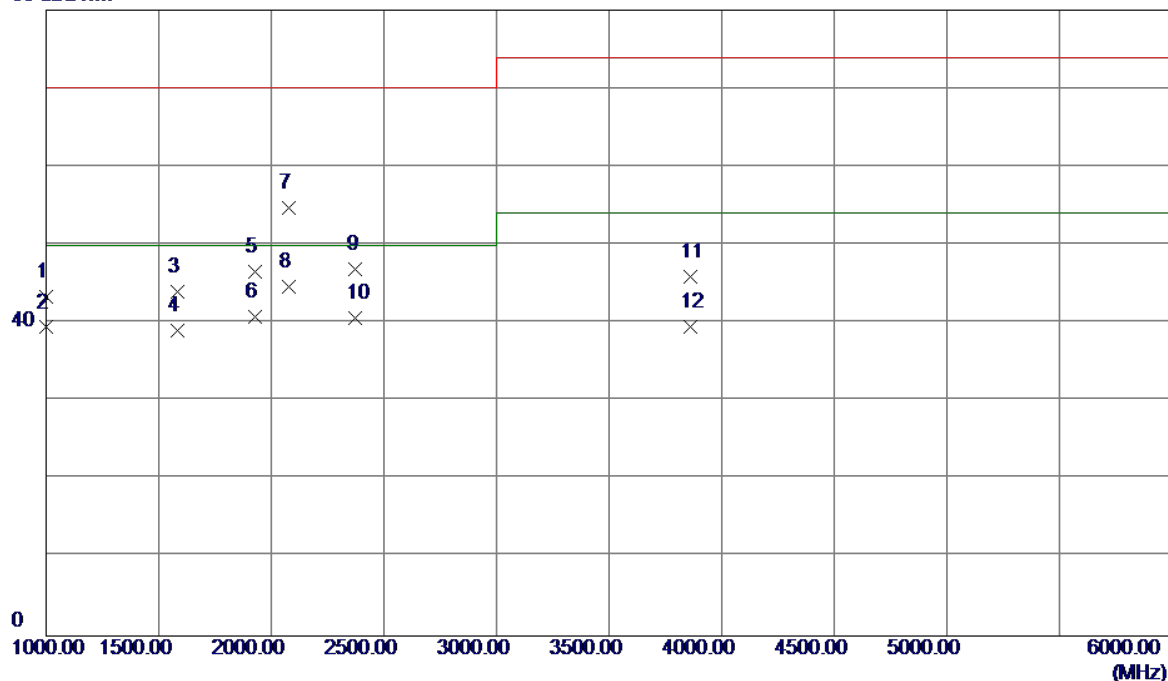

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	50.09	-6.73	43.36	70.00	-26.64	Peak
2	1000.0000	46.17	-6.73	39.44	50.00	-10.56	AVG
3	1585.0000	48.60	-4.55	44.05	70.00	-25.95	Peak
4	1585.0000	43.58	-4.55	39.03	50.00	-10.97	AVG
5	1930.0000	49.51	-2.90	46.61	70.00	-23.39	Peak
6	1930.0000	43.73	-2.90	40.83	50.00	-9.17	AVG
7	2080.0000	56.80	-2.13	54.67	70.00	-15.33	Peak
8 *	2080.0000	46.75	-2.13	44.62	50.00	-5.38	AVG
9	2375.0000	47.36	-0.52	46.84	70.00	-23.16	Peak
10	2375.0000	41.19	-0.52	40.67	50.00	-9.33	AVG
11	3860.0000	43.25	2.59	45.84	74.00	-28.16	Peak
12	3860.0000	36.88	2.59	39.47	54.00	-14.53	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handfree+vedio+HDMI out (PoE)		
Test Engineer	Simon Ling		


80 dBuV/m

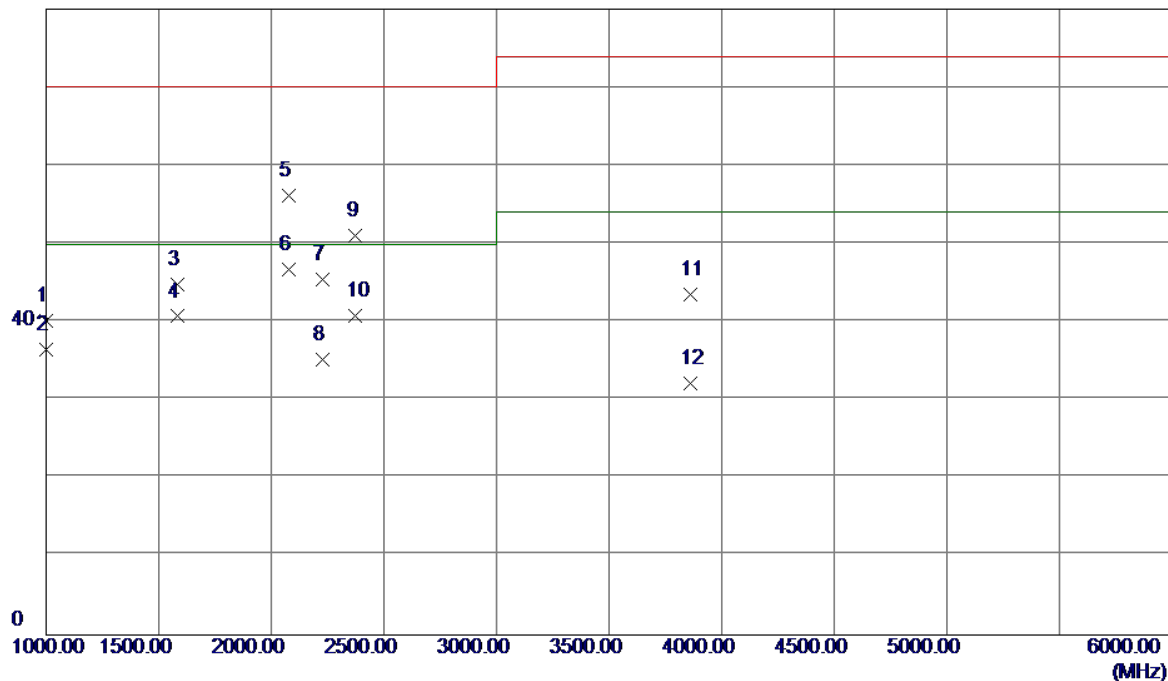

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	46.86	-6.73	40.13	70.00	-29.87	Peak
2	1000.0000	43.17	-6.73	36.44	50.00	-13.56	AVG
3	1585.0000	49.30	-4.55	44.75	70.00	-25.25	Peak
4	1585.0000	45.27	-4.55	40.72	50.00	-9.28	AVG
5	2080.0000	58.22	-2.13	56.09	70.00	-13.91	Peak
6 *	2080.0000	48.89	-2.13	46.76	50.00	-3.24	AVG
7	2227.5000	46.81	-1.32	45.49	70.00	-24.51	Peak
8	2227.5000	36.57	-1.32	35.25	50.00	-14.75	AVG
9	2375.0000	51.56	-0.52	51.04	70.00	-18.96	Peak
10	2375.0000	41.28	-0.52	40.76	50.00	-9.24	AVG
11	3860.0000	40.99	2.59	43.58	74.00	-30.42	Peak
12	3860.0000	29.64	2.59	32.23	54.00	-21.77	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

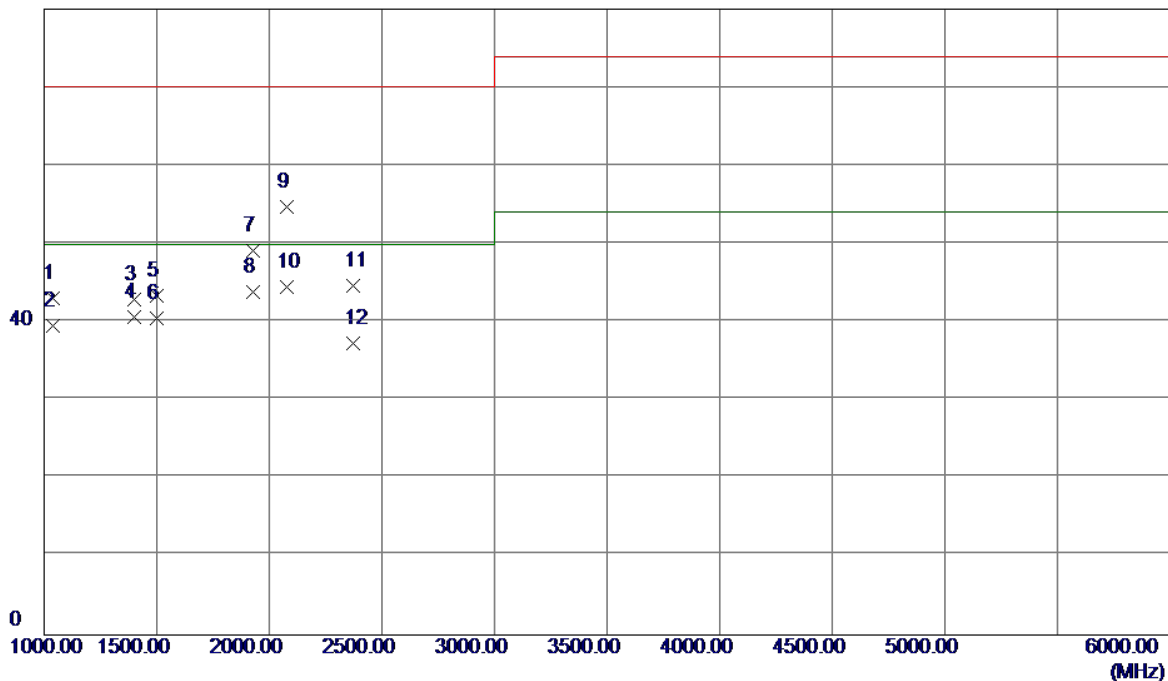

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1040.0000	49.62	-6.59	43.03	70.00	-26.97	Peak
2	1040.0000	46.15	-6.59	39.56	50.00	-10.44	AVG
3	1400.0000	48.16	-5.31	42.85	70.00	-27.15	Peak
4	1400.0000	45.90	-5.31	40.59	50.00	-9.41	AVG
5	1500.0000	48.36	-4.95	43.41	70.00	-26.59	Peak
6	1500.0000	45.36	-4.95	40.41	50.00	-9.59	AVG
7	1930.0000	52.04	-2.90	49.14	70.00	-20.86	Peak
8	1930.0000	46.74	-2.90	43.84	50.00	-6.16	AVG
9	2080.0000	56.79	-2.13	54.66	70.00	-15.34	Peak
10 *	2080.0000	46.56	-2.13	44.43	50.00	-5.57	AVG
11	2375.0000	45.14	-0.51	44.63	70.00	-25.37	Peak
12	2375.0000	37.85	-0.51	37.34	50.00	-12.66	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

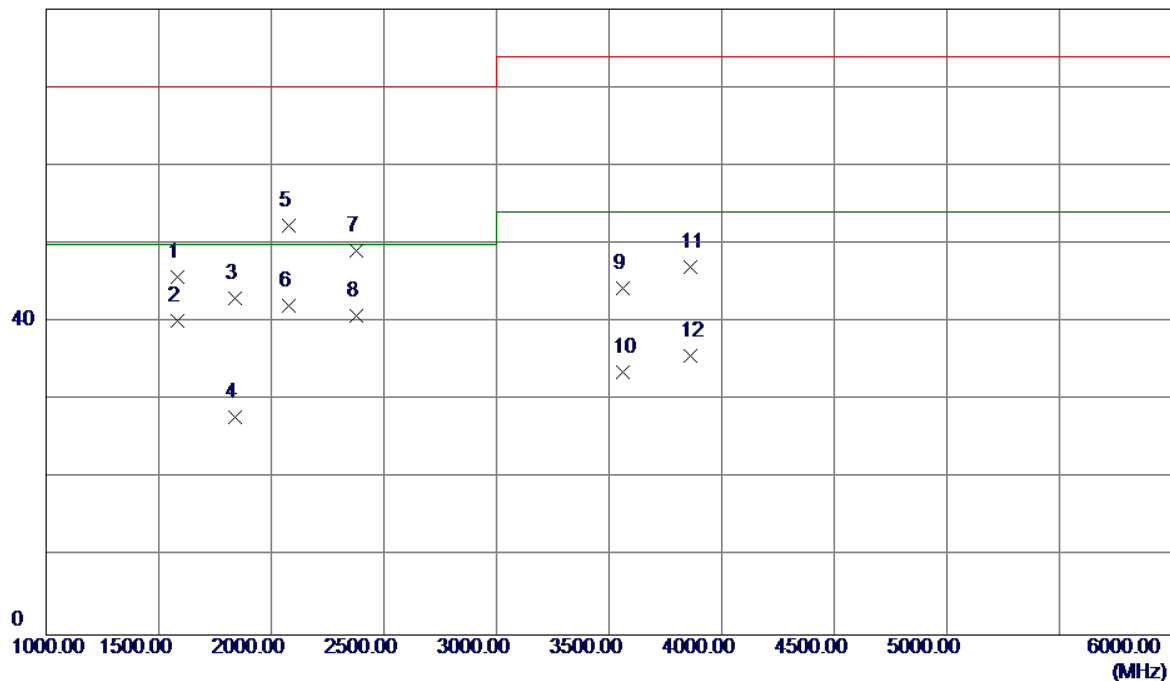

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1585.0000	50.27	-4.55	45.72	70.00	-24.28	Peak
2	1585.0000	44.67	-4.55	40.12	50.00	-9.88	AVG
3	1840.0000	46.41	-3.33	43.08	70.00	-26.92	Peak
4	1840.0000	31.15	-3.33	27.82	50.00	-22.18	AVG
5	2077.5000	54.53	-2.15	52.38	70.00	-17.62	Peak
6 *	2077.5000	44.16	-2.15	42.01	50.00	-7.99	AVG
7	2377.5000	49.61	-0.50	49.11	70.00	-20.89	Peak
8	2377.5000	41.33	-0.50	40.83	50.00	-9.17	AVG
9	3562.5000	41.97	2.31	44.28	74.00	-29.72	Peak
10	3562.5000	31.28	2.31	33.59	54.00	-20.41	AVG
11	3860.0000	44.45	2.59	47.04	74.00	-26.96	Peak
12	3860.0000	33.15	2.59	35.74	54.00	-18.26	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

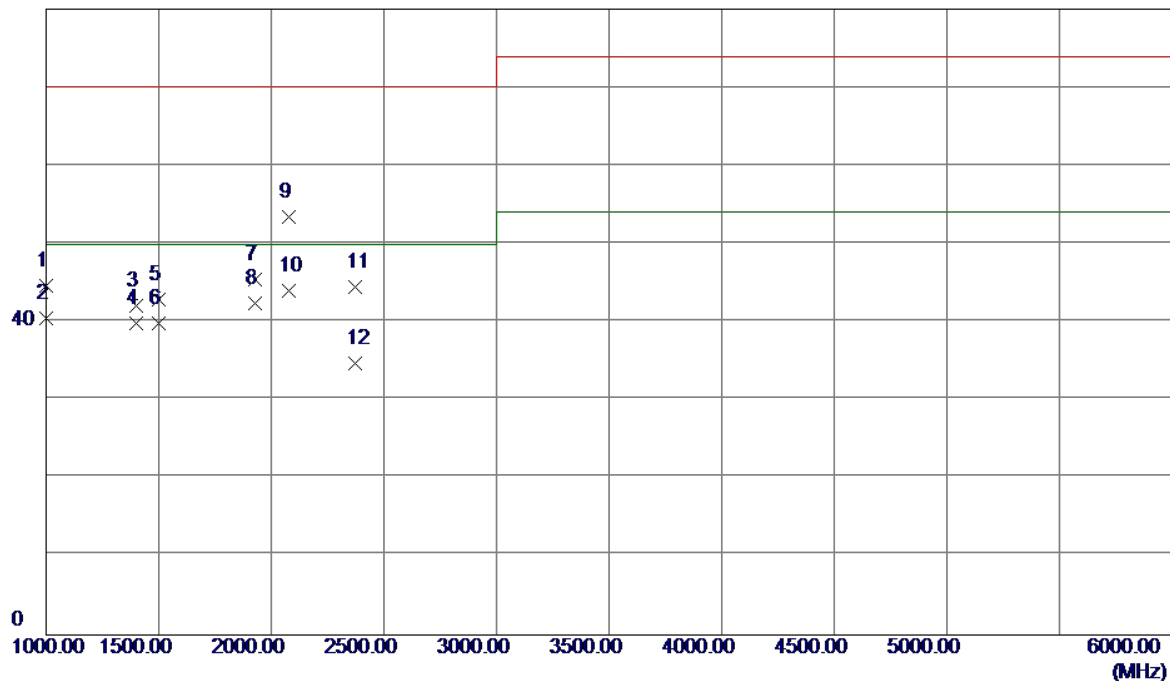

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	51.37	-6.73	44.64	70.00	-25.36	Peak
2	1000.0000	47.18	-6.73	40.45	50.00	-9.55	AVG
3	1400.0000	47.35	-5.31	42.04	70.00	-27.96	Peak
4	1400.0000	45.19	-5.31	39.88	50.00	-10.12	AVG
5	1500.0000	47.83	-4.95	42.88	70.00	-27.12	Peak
6	1500.0000	44.78	-4.95	39.83	50.00	-10.17	AVG
7	1930.0000	48.33	-2.90	45.43	70.00	-24.57	Peak
8	1930.0000	45.27	-2.90	42.37	50.00	-7.63	AVG
9	2080.0000	55.60	-2.13	53.47	70.00	-16.53	Peak
10 *	2080.0000	46.17	-2.13	44.04	50.00	-5.96	AVG
11	2375.0000	45.05	-0.51	44.54	70.00	-25.46	Peak
12	2375.0000	35.18	-0.51	34.67	50.00	-15.33	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

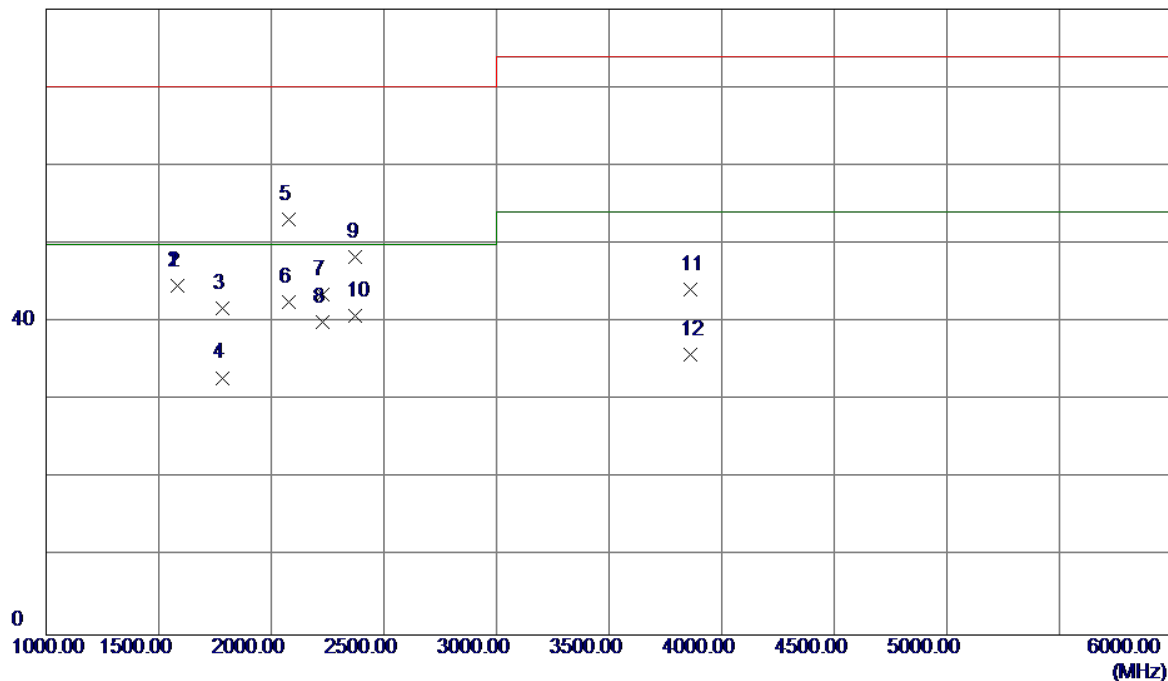

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1585.0000	49.25	-4.55	44.70	70.00	-25.30	Peak
2 *	1585.0000	49.13	-4.55	44.58	50.00	-5.42	AVG
3	1782.5000	45.44	-3.61	41.83	70.00	-28.17	Peak
4	1782.5000	36.49	-3.61	32.88	50.00	-17.12	AVG
5	2077.5000	55.31	-2.15	53.16	70.00	-16.84	Peak
6	2077.5000	44.68	-2.15	42.53	50.00	-7.47	AVG
7	2227.5000	44.79	-1.32	43.47	70.00	-26.53	Peak
8	2227.5000	41.30	-1.32	39.98	50.00	-10.02	AVG
9	2375.0000	48.88	-0.51	48.37	70.00	-21.63	Peak
10	2375.0000	41.36	-0.51	40.85	50.00	-9.15	AVG
11	3860.0000	41.58	2.59	44.17	74.00	-29.83	Peak
12	3860.0000	33.27	2.59	35.86	54.00	-18.14	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

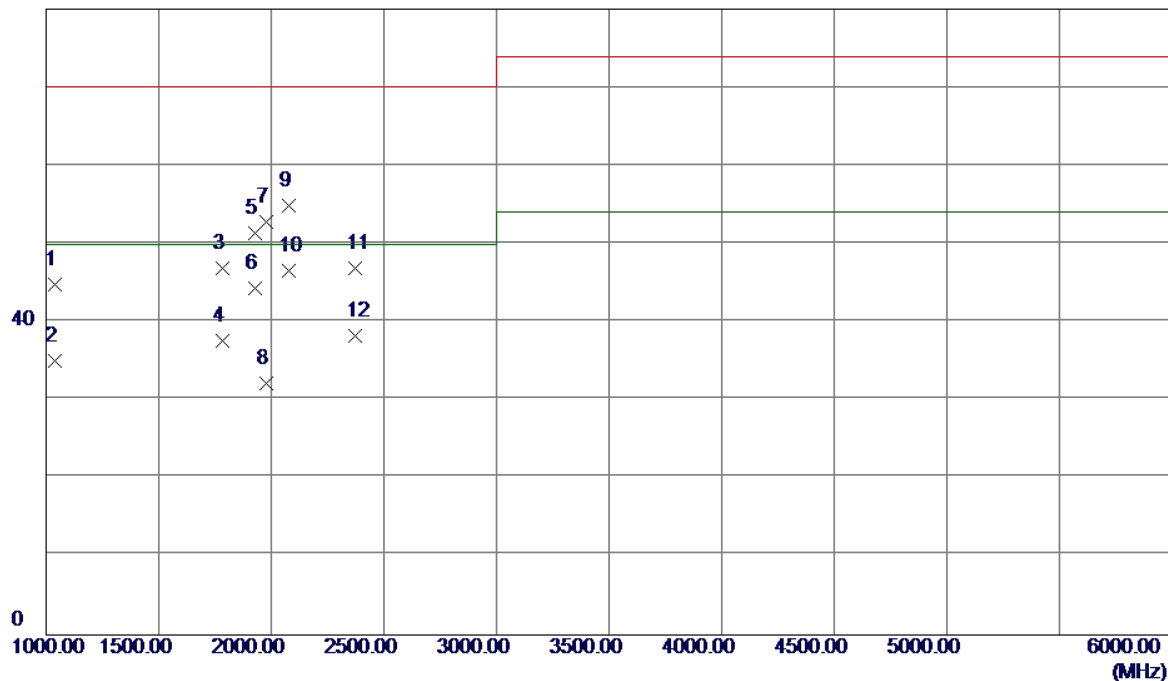

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1040.0000	51.39	-6.59	44.80	70.00	-25.20	Peak
2	1040.0000	41.58	-6.59	34.99	50.00	-15.01	AVG
3	1782.5000	50.53	-3.61	46.92	70.00	-23.08	Peak
4	1782.5000	41.27	-3.61	37.66	50.00	-12.34	AVG
5	1930.0000	54.30	-2.90	51.40	70.00	-18.60	Peak
6	1930.0000	47.17	-2.90	44.27	50.00	-5.73	AVG
7	1980.0000	55.43	-2.67	52.76	70.00	-17.24	Peak
8	1980.0000	34.79	-2.67	32.12	50.00	-17.88	AVG
9	2080.0000	56.95	-2.13	54.82	70.00	-15.18	Peak
10 *	2080.0000	48.76	-2.13	46.63	50.00	-3.37	AVG
11	2375.0000	47.44	-0.51	46.93	70.00	-23.07	Peak
12	2375.0000	38.79	-0.51	38.28	50.00	-11.72	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

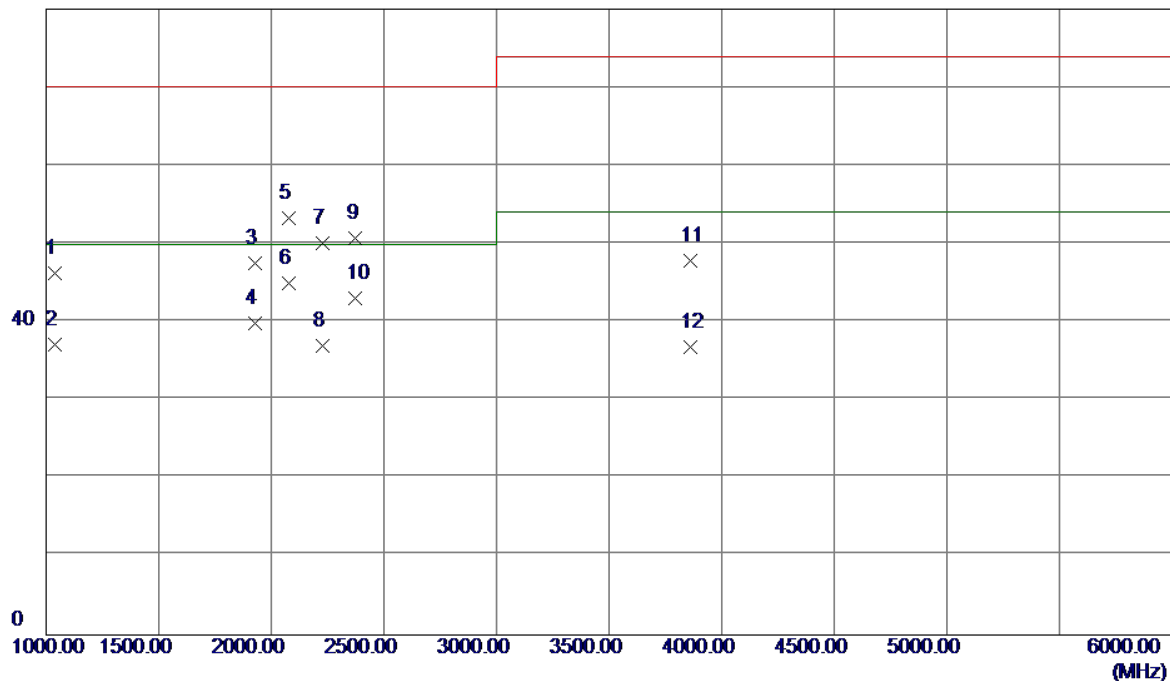

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1040.0000	52.85	-6.59	46.26	70.00	-23.74	Peak
2	1040.0000	43.69	-6.59	37.10	50.00	-12.90	AVG
3	1930.0000	50.39	-2.90	47.49	70.00	-22.51	Peak
4	1930.0000	42.68	-2.90	39.78	50.00	-10.22	AVG
5	2080.0000	55.42	-2.13	53.29	70.00	-16.71	Peak
6 *	2080.0000	47.15	-2.13	45.02	50.00	-4.98	AVG
7	2227.5000	51.39	-1.32	50.07	70.00	-19.93	Peak
8	2227.5000	38.27	-1.32	36.95	50.00	-13.05	AVG
9	2375.0000	51.25	-0.51	50.74	70.00	-19.26	Peak
10	2375.0000	43.57	-0.51	43.06	50.00	-6.94	AVG
11	3860.0000	45.22	2.59	47.81	74.00	-26.19	Peak
12	3860.0000	34.18	2.59	36.77	54.00	-17.23	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Vertical
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV/m

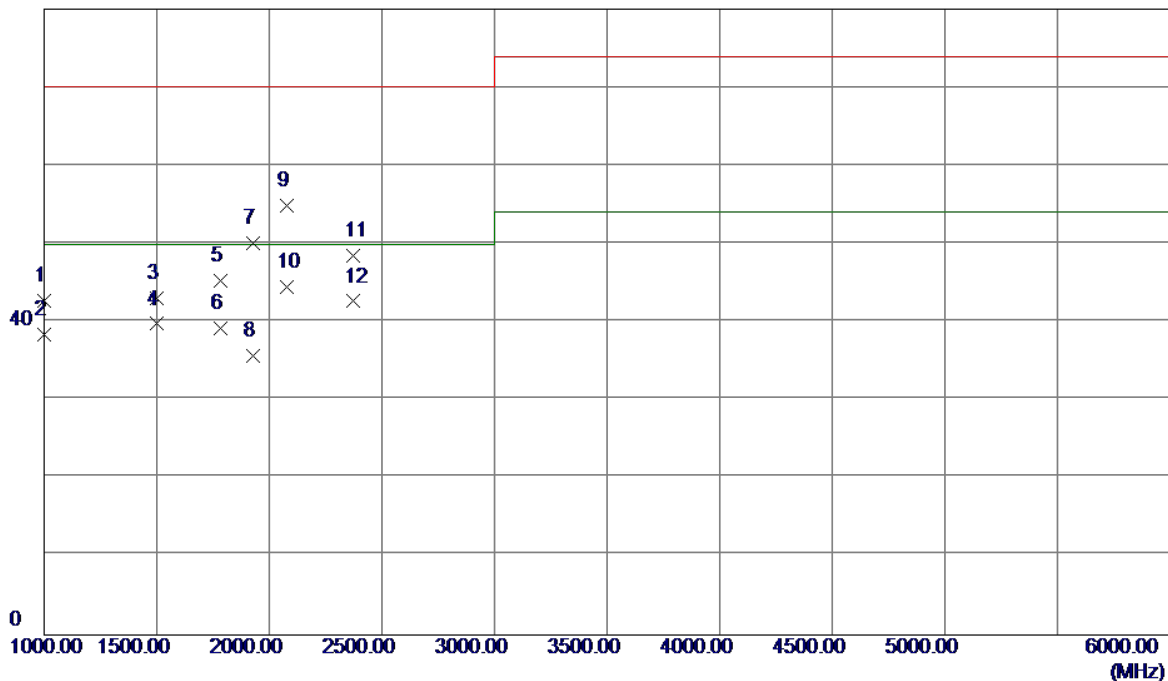

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	49.47	-6.73	42.74	70.00	-27.26	Peak
2	1000.0000	45.18	-6.73	38.45	50.00	-11.55	AVG
3	1500.0000	47.93	-4.95	42.98	70.00	-27.02	Peak
4	1500.0000	44.71	-4.95	39.76	50.00	-10.24	AVG
5	1782.5000	48.86	-3.61	45.25	70.00	-24.75	Peak
6	1782.5000	42.76	-3.61	39.15	50.00	-10.85	AVG
7	1930.0000	53.03	-2.90	50.13	70.00	-19.87	Peak
8	1930.0000	38.56	-2.90	35.66	50.00	-14.34	AVG
9	2080.0000	57.05	-2.13	54.92	70.00	-15.08	Peak
10 *	2080.0000	46.58	-2.13	44.45	50.00	-5.55	AVG
11	2375.0000	48.93	-0.51	48.42	70.00	-21.58	Peak
12	2375.0000	43.15	-0.51	42.64	50.00	-7.36	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Polarization	Horizontal
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		

80 dBuV/m

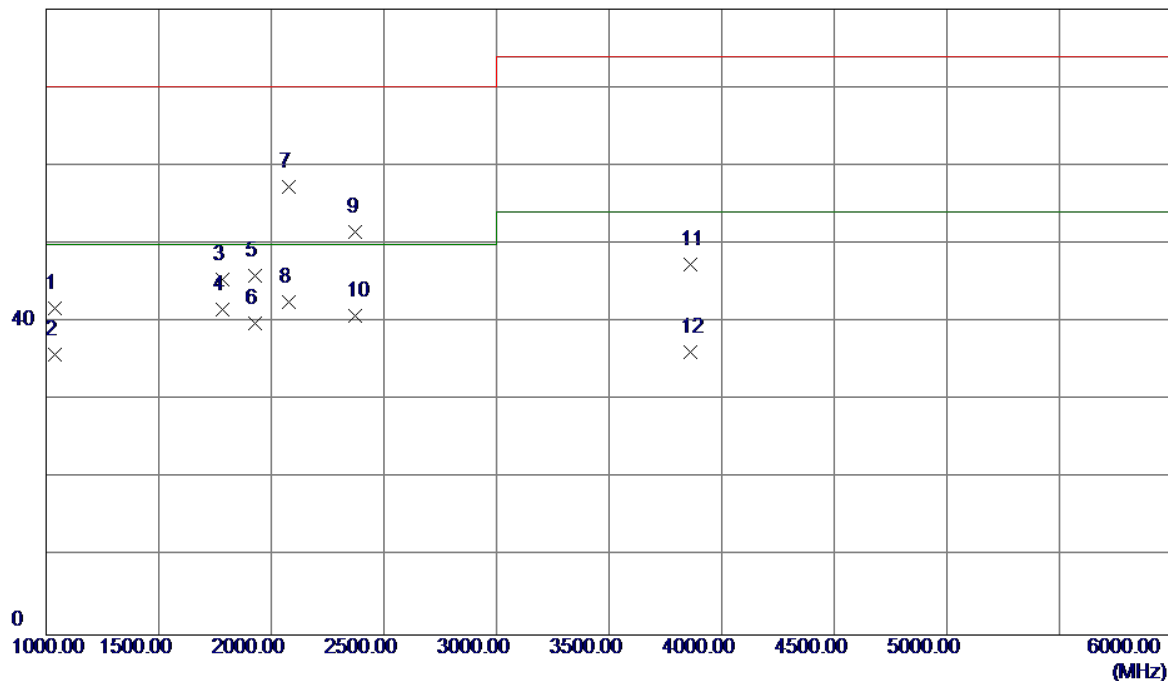

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1040.0000	48.31	-6.59	41.72	70.00	-28.28	Peak
2	1040.0000	42.48	-6.59	35.89	50.00	-14.11	AVG
3	1782.5000	49.11	-3.61	45.50	70.00	-24.50	Peak
4	1782.5000	45.18	-3.61	41.57	50.00	-8.43	AVG
5	1930.0000	48.86	-2.90	45.96	70.00	-24.04	Peak
6	1930.0000	42.68	-2.90	39.78	50.00	-10.22	AVG
7	2080.0000	59.45	-2.13	57.32	70.00	-12.68	Peak
8 *	2080.0000	44.75	-2.13	42.62	50.00	-7.38	AVG
9	2375.0000	52.01	-0.52	51.49	70.00	-18.51	Peak
10	2375.0000	41.27	-0.52	40.75	50.00	-9.25	AVG
11	3860.0000	44.75	2.59	47.34	74.00	-26.66	Peak
12	3860.0000	33.59	2.59	36.18	54.00	-17.82	AVG

3.2 CONDUCTED EMISSION MEASUREMENT AT AC MAINS POWER PORTS

3.2.1 LIMITS

Requirements for conducted emissions from AC mains power ports of Class A equipment

Table clause	Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class A Limits (dB(μV))
A9.1	0.15 - 0.5	AMN	Quasi Peak / 9 kHz	79
	0.5 - 30			73
A9.2	0.15 - 0.5	AMN	Average / 9 kHz	66
	0.5 - 30			60
Apply A9.1 and A9.2 across the entire frequency range.				

Requirements for conducted emissions from AC mains power ports of Class B equipment

Requirements for conducted emissions from VTS main power ports of Class B equipment				
Table clause	Frequency Range MHz	Coupling Device	Detector Type / bandwidth	Class B Limits (dB(μV))
A10.1	0.15 - 0.5	AMN	Quasi Peak / 9 kHz	66-56
	0.5 - 5			56
	5 - 30			60
A10.2	0.15 - 0.5	AMN	Average / 9 kHz	56-46
	0.5 - 5			46
	5 - 30			50
Apply A10.1 and A10.2 across the entire frequency range.				

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9KHz-30 MHz)(5m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.

All calibration period of equipment list is one year.


3.2.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation

3.2.5 TEST SETUP

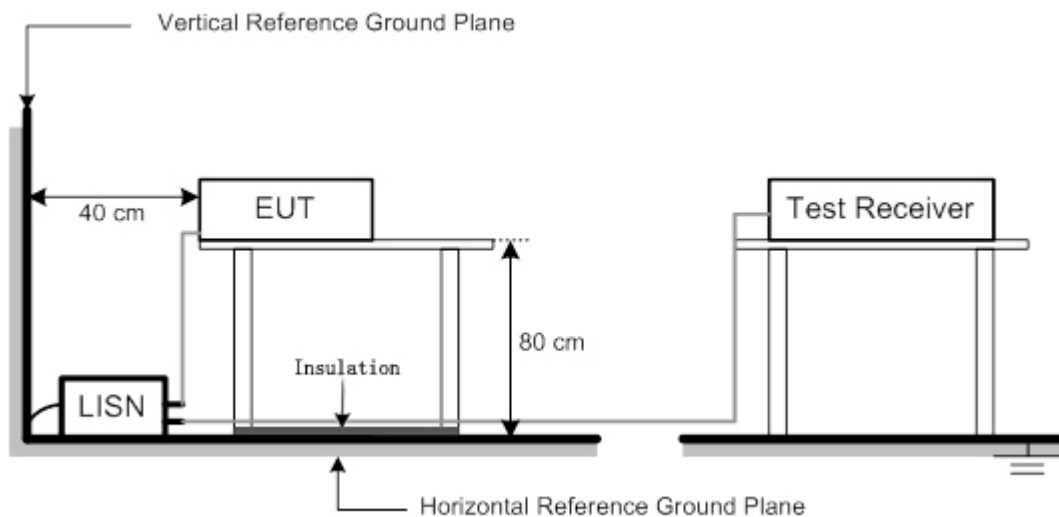

3.2.6 TEST RESULTS


EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		

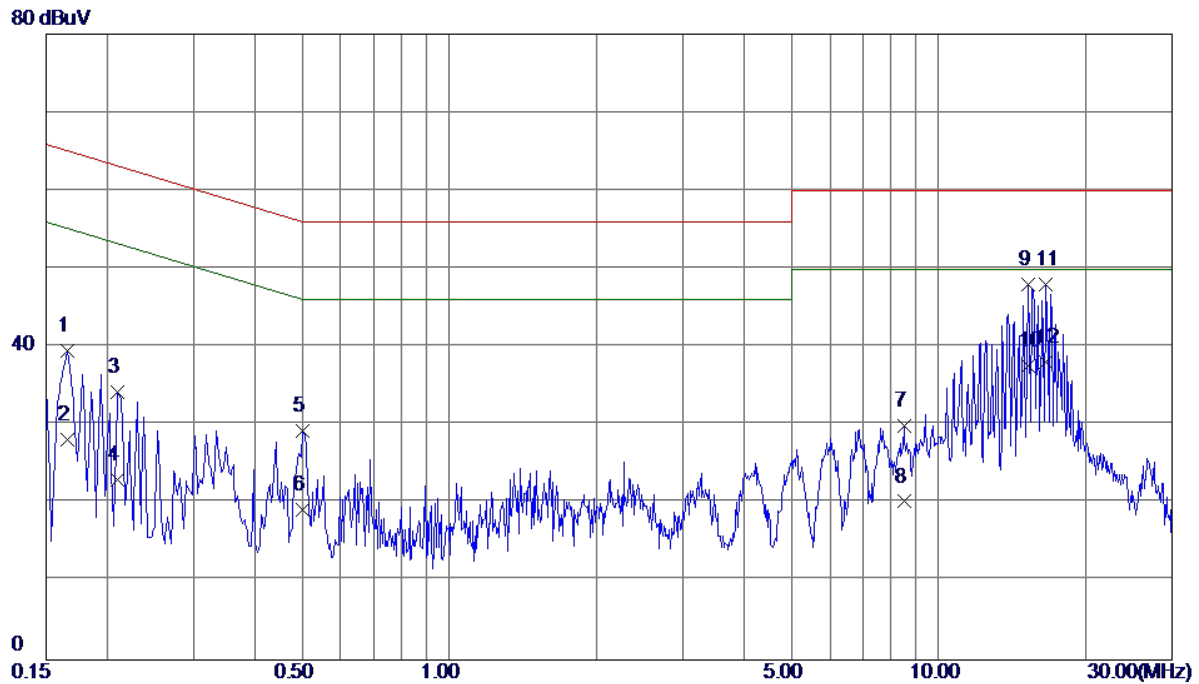

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	29.93	9.57	39.50	65.16	-25.66	QP
2	0.1660	18.60	9.57	28.17	55.16	-26.99	AVG
3	0.2100	24.74	9.57	34.31	63.21	-28.90	QP
4	0.2100	13.47	9.57	23.04	53.21	-30.17	AVG
5	0.5020	19.64	9.69	29.33	56.00	-26.67	QP
6	0.5020	9.50	9.69	19.19	46.00	-26.81	AVG
7	8.4940	19.45	10.44	29.89	60.00	-30.11	QP
8	8.4940	9.80	10.44	20.24	50.00	-29.76	AVG
9	15.2180	37.29	10.70	47.99	60.00	-12.01	QP
10	15.2180	26.90	10.70	37.60	50.00	-12.40	AVG
11 *	16.5660	37.33	10.73	48.06	60.00	-11.94	QP
12	16.5660	27.30	10.73	38.03	50.00	-11.97	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Handfree+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV

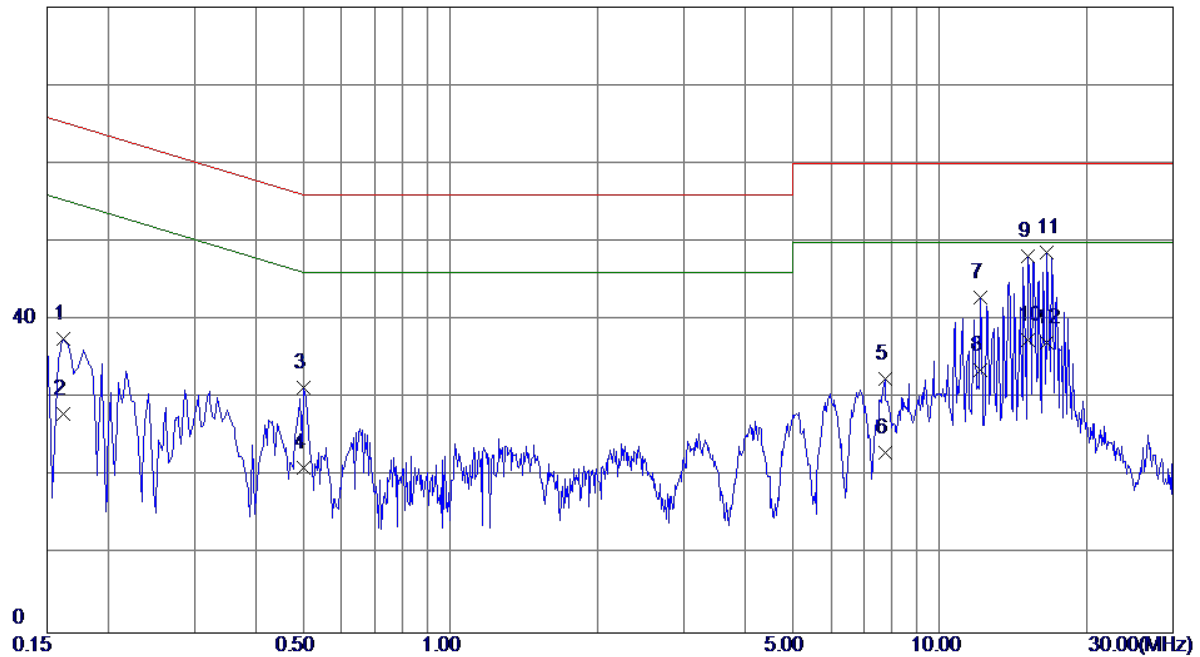

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	28.04	9.51	37.55	65.36	-27.81	QP
2	0.1620	18.50	9.51	28.01	55.36	-27.35	AVG
3	0.5020	21.93	9.49	31.42	56.00	-24.58	QP
4	0.5020	11.60	9.49	21.09	46.00	-24.91	AVG
5	7.7260	22.19	10.30	32.49	60.00	-27.51	QP
6	7.7260	12.73	10.30	23.03	50.00	-26.97	AVG
7	12.0860	32.17	10.64	42.81	60.00	-17.19	QP
8	12.0860	22.90	10.64	33.54	50.00	-16.46	AVG
9	15.1860	37.45	10.71	48.16	60.00	-11.84	QP
10	15.1860	26.79	10.71	37.50	50.00	-12.50	AVG
11 *	16.6020	37.88	10.76	48.64	60.00	-11.36	QP
12	16.6020	26.30	10.76	37.06	50.00	-12.94	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV

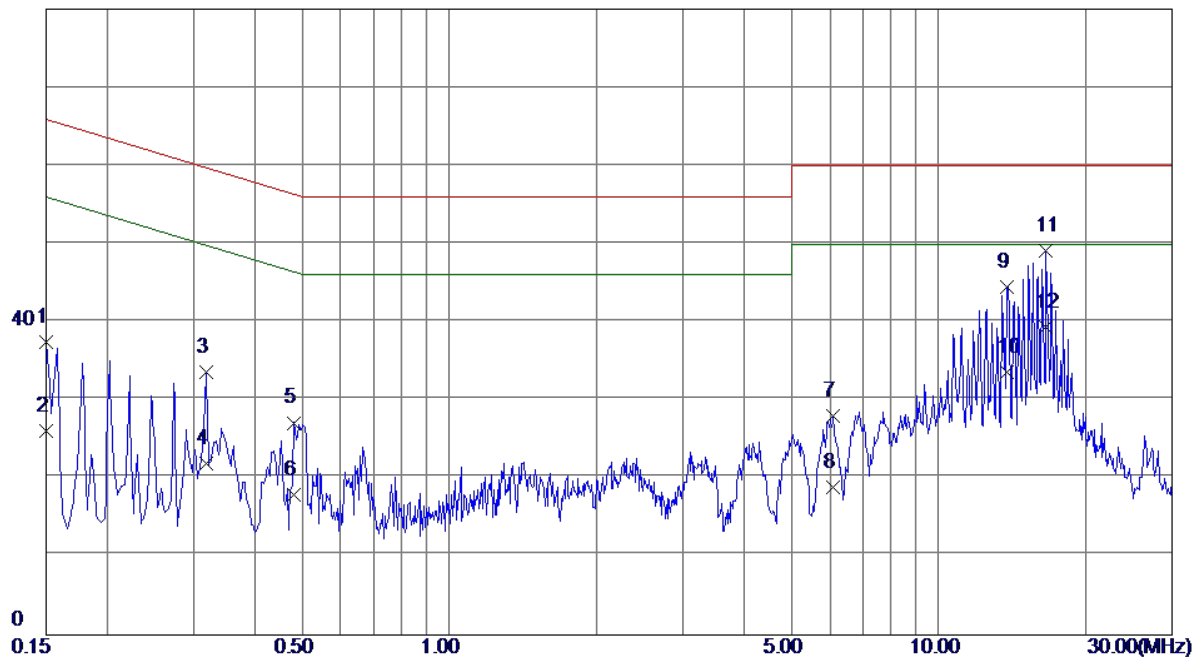

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	27.94	9.57	37.51	66.00	-28.49	QP
2	0.1500	16.50	9.57	26.07	56.00	-29.93	AVG
3	0.3180	23.98	9.58	33.56	59.76	-26.20	QP
4	0.3180	12.30	9.58	21.88	49.76	-27.88	AVG
5	0.4820	17.45	9.67	27.12	56.30	-29.18	QP
6	0.4820	8.20	9.67	17.87	46.30	-28.43	AVG
7	6.0900	17.62	10.34	27.96	60.00	-32.04	QP
8	6.0900	8.59	10.34	18.93	50.00	-31.07	AVG
9	13.8260	33.79	10.65	44.44	60.00	-15.56	QP
10	13.8260	22.90	10.65	33.55	50.00	-16.45	AVG
11	16.5900	38.37	10.73	49.10	60.00	-10.90	QP
12 *	16.5900	28.60	10.73	39.33	50.00	-10.67	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Handset+vedio+HDMI out (Adapter)		
Test Engineer	Simon Ling		


80 dBuV

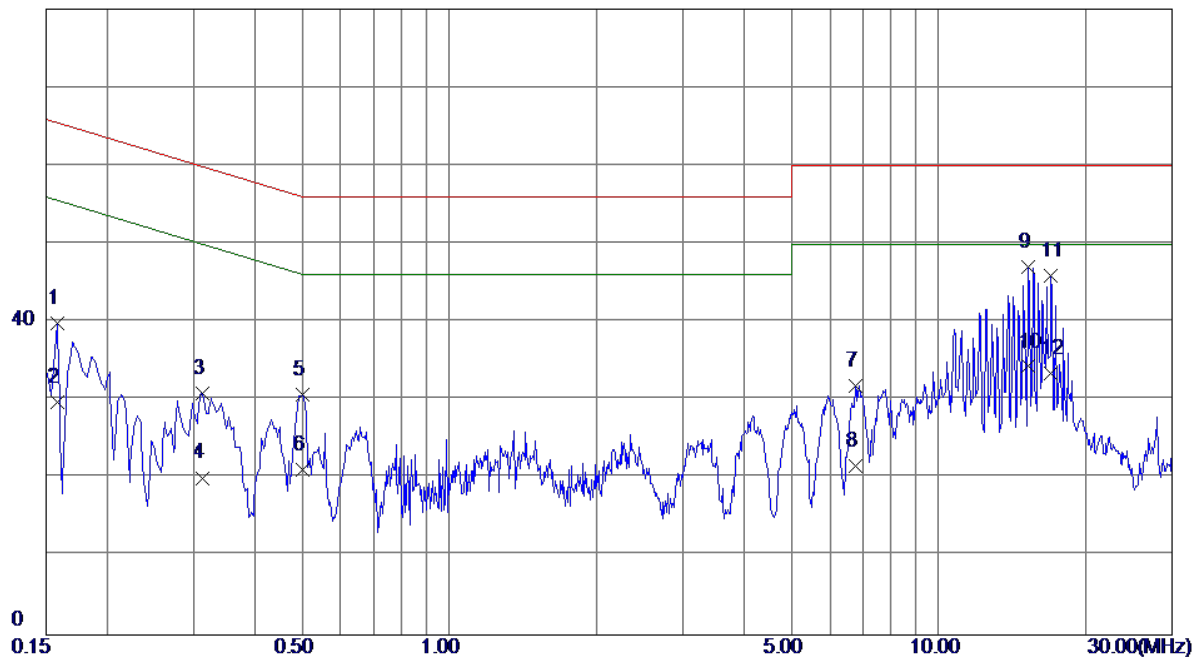

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1580	30.24	9.53	39.77	65.57	-25.80	QP
2	0.1580	20.30	9.53	29.83	55.57	-25.74	AVG
3	0.3140	21.35	9.58	30.93	59.86	-28.93	QP
4	0.3140	10.50	9.58	20.08	59.86	-39.78	CAV
5	0.5020	21.30	9.49	30.79	56.00	-25.21	QP
6	0.5020	11.60	9.49	21.09	46.00	-24.91	AVG
7	6.7460	21.66	10.22	31.88	60.00	-28.12	QP
8	6.7460	11.39	10.22	21.61	50.00	-28.39	AVG
9 *	15.2580	36.37	10.71	47.08	60.00	-12.92	QP
10	15.2580	23.61	10.71	34.32	50.00	-15.68	AVG
11	16.9660	35.11	10.78	45.89	60.00	-14.11	QP
12	16.9660	22.70	10.78	33.48	50.00	-16.52	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV

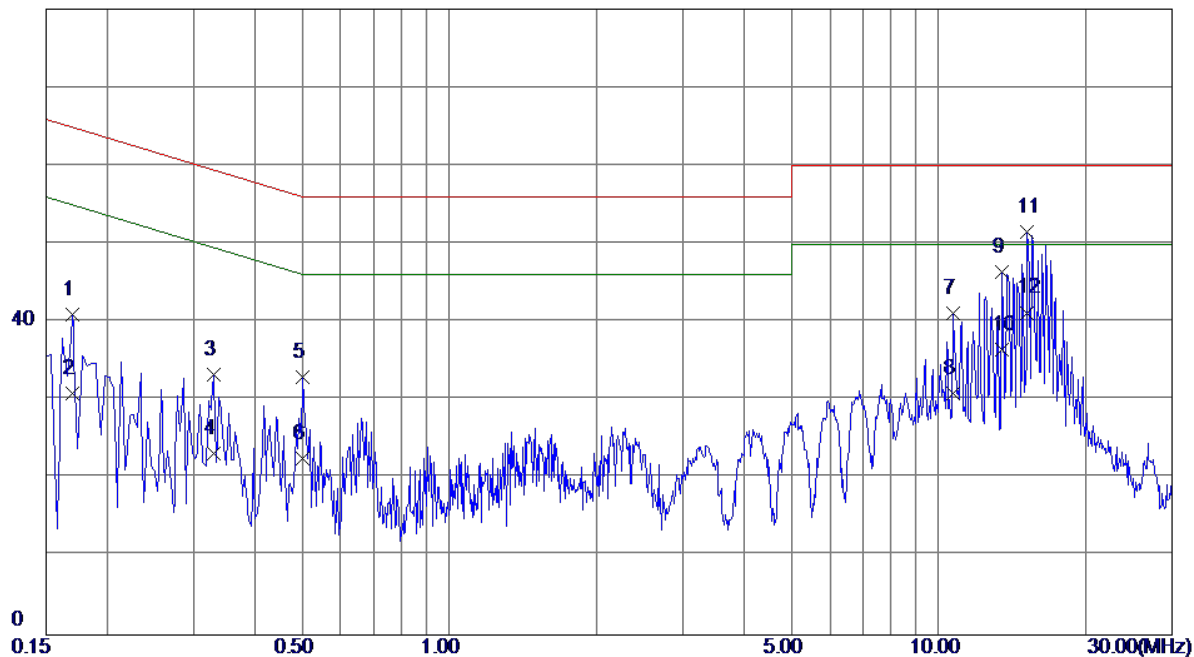

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	31.38	9.57	40.95	64.96	-24.01	QP
2	0.1700	21.30	9.57	30.87	54.96	-24.09	AVG
3	0.3300	23.77	9.58	33.35	59.45	-26.10	QP
4	0.3300	13.60	9.58	23.18	49.45	-26.27	AVG
5	0.5020	23.26	9.69	32.95	56.00	-23.05	QP
6	0.5020	12.80	9.69	22.49	46.00	-23.51	AVG
7	10.7100	30.58	10.52	41.10	60.00	-18.90	QP
8	10.7100	20.40	10.52	30.92	50.00	-19.08	AVG
9	13.4700	35.70	10.64	46.34	60.00	-13.66	QP
10	13.4700	25.90	10.64	36.54	50.00	-13.46	AVG
11 *	15.1900	40.75	10.70	51.45	60.00	-8.55	QP
12	15.1900	30.50	10.70	41.20	50.00	-8.80	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Earphone+vedio+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV

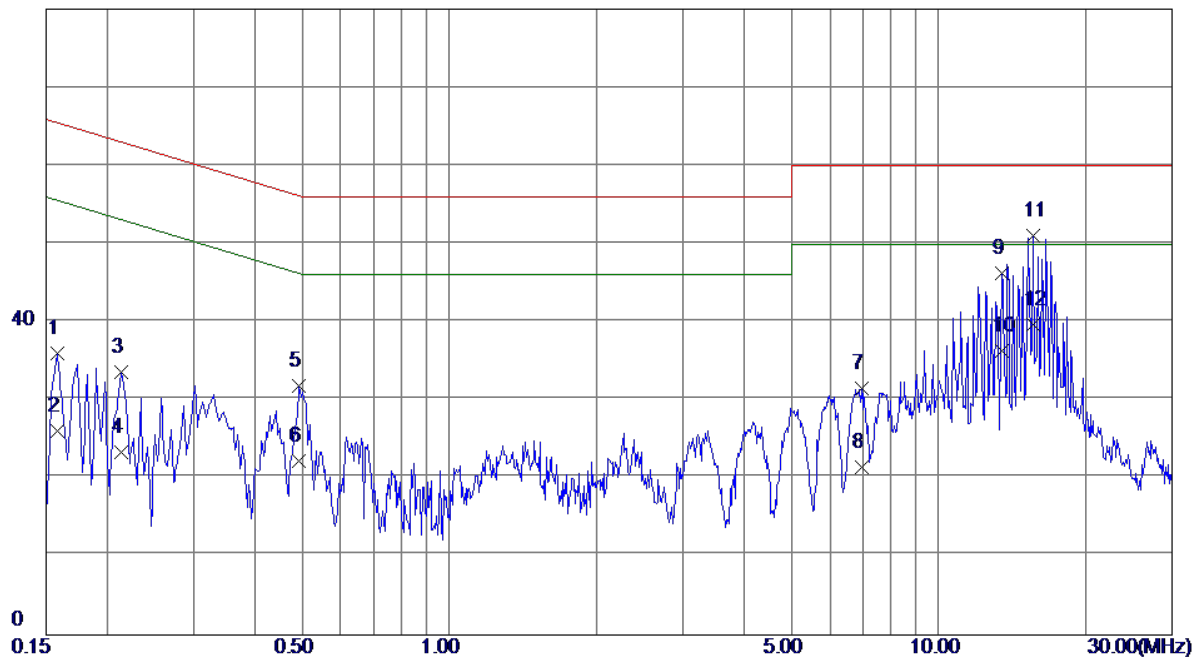

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1580	26.43	9.53	35.96	65.57	-29.61	QP
2	0.1580	16.50	9.53	26.03	55.57	-29.54	AVG
3	0.2140	24.07	9.57	33.64	63.05	-29.41	QP
4	0.2140	13.80	9.57	23.37	53.05	-29.68	AVG
5	0.4940	22.35	9.49	31.84	56.10	-24.26	QP
6	0.4940	12.69	9.49	22.18	46.10	-23.92	AVG
7	6.9540	21.25	10.21	31.46	60.00	-28.54	QP
8	6.9540	11.30	10.21	21.51	50.00	-28.49	AVG
9	13.4660	35.58	10.67	46.25	60.00	-13.75	QP
10	13.4660	25.70	10.67	36.37	50.00	-13.63	AVG
11 *	15.5660	40.30	10.72	51.02	60.00	-8.98	QP
12	15.5660	28.90	10.72	39.62	50.00	-10.38	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Line
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		


80 dBuV

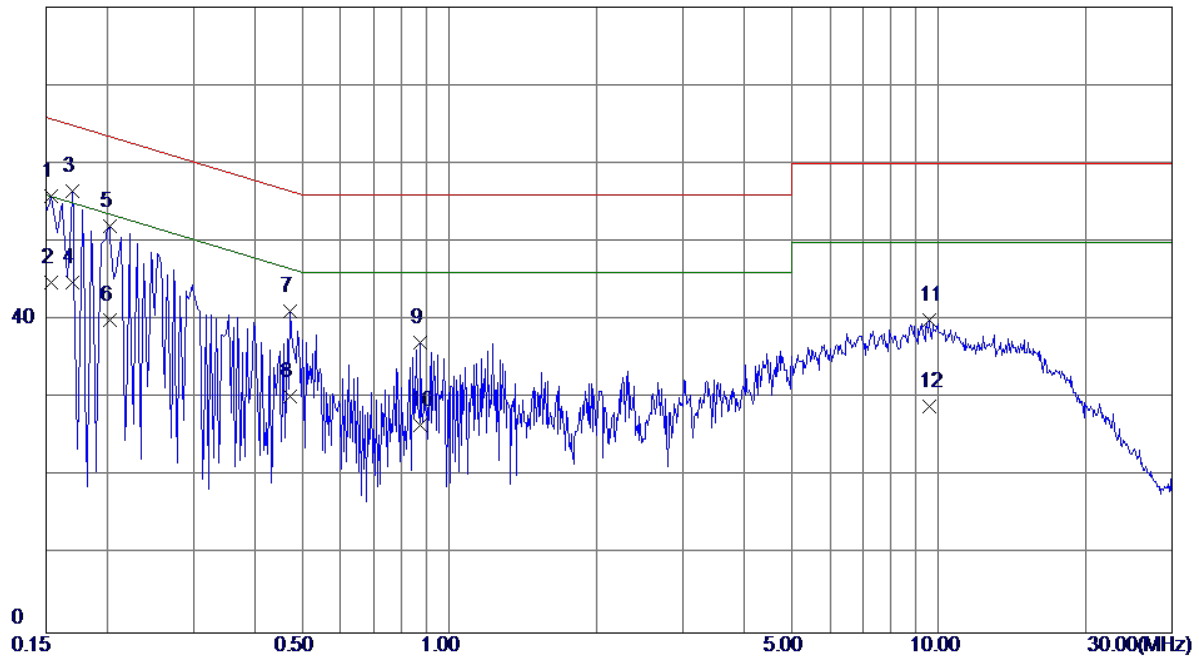

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	46.34	9.57	55.91	65.79	-9.88	QP
2	0.1539	35.20	9.57	44.77	55.79	-11.02	AVG
3 *	0.1700	46.85	9.57	56.42	64.96	-8.54	QP
4	0.1700	35.30	9.57	44.87	54.96	-10.09	AVG
5	0.2020	42.49	9.57	52.06	63.53	-11.47	QP
6	0.2020	30.50	9.57	40.07	53.53	-13.46	AVG
7	0.4740	31.45	9.66	41.11	56.44	-15.33	QP
8	0.4740	20.60	9.66	30.26	46.44	-16.18	AVG
9	0.8740	27.25	9.83	37.08	56.00	-18.92	QP
10	0.8740	16.70	9.83	26.53	46.00	-19.47	AVG
11	9.5780	29.46	10.48	39.94	60.00	-20.06	QP
12	9.5780	18.50	10.48	28.98	50.00	-21.02	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz	Phase	Neutral
Test Mode	Play vedio+storage R/W+HDMI out(Adapter)		
Test Engineer	Simon Ling		

80 dBuV

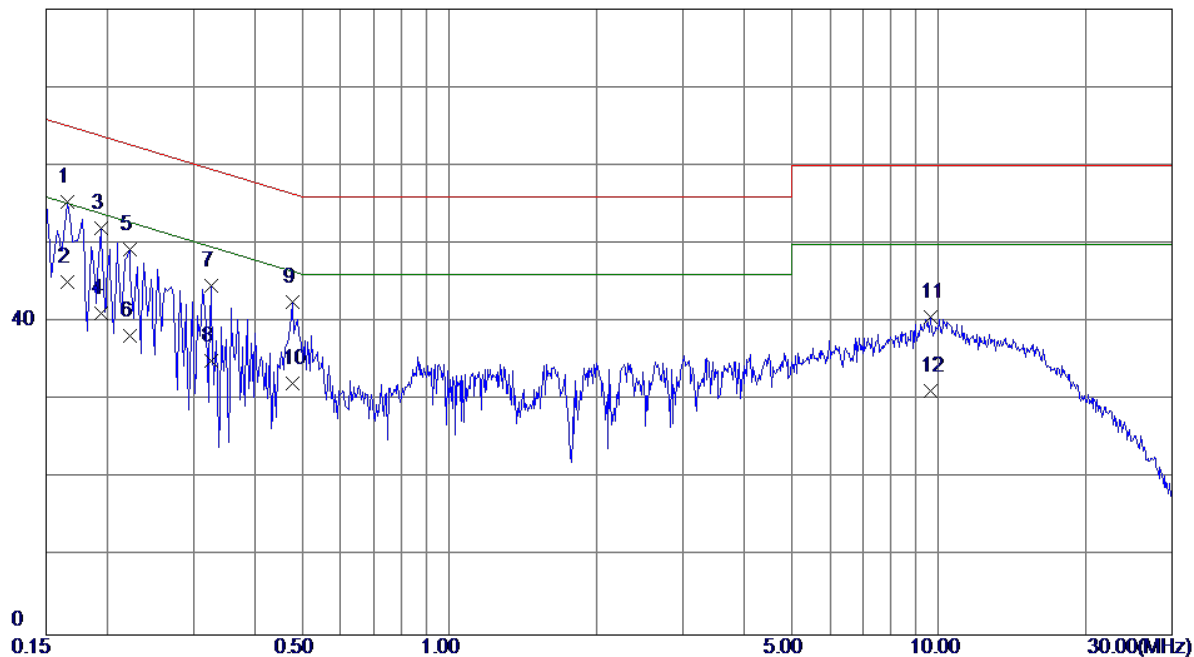

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1660	45.89	9.49	55.38	65.16	-9.78	QP
2	0.1660	35.60	9.49	45.09	55.16	-10.07	AVG
3	0.1940	42.48	9.55	52.03	63.86	-11.83	QP
4	0.1940	31.58	9.55	41.13	53.86	-12.73	AVG
5	0.2220	39.63	9.57	49.20	62.74	-13.54	QP
6	0.2220	28.60	9.57	38.17	52.74	-14.57	AVG
7	0.3260	35.04	9.58	44.62	59.55	-14.93	QP
8	0.3260	25.40	9.58	34.98	49.55	-14.57	AVG
9	0.4780	33.08	9.49	42.57	56.37	-13.80	QP
10	0.4780	22.60	9.49	32.09	46.37	-14.28	AVG
11	9.6180	30.08	10.54	40.62	60.00	-19.38	QP
12	9.6180	20.60	10.54	31.14	50.00	-18.86	AVG

3.3 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST

3.3.1 LIMITS

Requirements for asymmetric mode conducted emissions from Class A equipment

Table clause	Frequency range MHz	Coupling device	Detector type / Bandwidth	Class A voltage limits dB(μV)	Class A current limits dB(μV)
A11.1	0.15 — 0.5	AAN	Quasi Peak / 9 kHz	97 — 87	n/a
	0.5 — 30			87	
	0.15 — 0.5	AAN	Average / 9 kHz	84— 74	
	0.5 — 30			74	
A11.2	0.15 — 0.5	CVP and current probe	Quasi Peak / 9 kHz	97 — 87	53 —43
	0.5 — 30			87	43
	0.15 — 0.5	CVP and current probe	Average / 9 kHz	84— 74	40 —30
	0.5 — 30			74	30
A11.3	0.15 — 0.5	Current probe	Quasi Peak / 9 kHz	n/a	53 —43
	0.5 — 30				43
	0.15 — 0.5	Current probe	Average / 9 kHz		40 —30
	0.5 — 30				30

The choice of coupling device and measurement procedure is defined in Annex C.

AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.9. The measurement shall cover the entire frequency range.

The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.

Testing is required at only one EUT supply voltage and frequency.

Applicable to ports listed above and intended to connect to cables longer than 3 m.

Requirements for asymmetric mode conducted emissions from Class B equipment

Table clause	Frequency range MHz	Coupling device	Detector type / Bandwidth	Class B voltage limits dB(μV)	Class B current limits dB(μV)
A12.1	0.15 — 0.5	AAN	Quasi Peak / 9 kHz	84 — 74	n/a
	0.5 — 30			74	
	0.15 — 0.5	AAN	Average / 9 kHz	74— 64	
	0.5 — 30			64	
A12.2	0.15 — 0.5	CVP and current probe	Quasi Peak / 9 kHz	84 — 74	40 — 30
	0.5 — 30			74	30
	0.15 — 0.5	CVP and current probe	Average / 9 kHz	74— 64	30 — 20
	0.5 — 30			64	20
A12.3	0.15 — 0.5	Current probe	Quasi Peak / 9 kHz	n/a	40 — 30
	0.5 — 30				30
	0.15 — 0.5	Current probe	Average / 9 kHz		30 — 20
	0.5 — 30				20

The choice of coupling device and measurement procedure is defined in Annex C.

Screened ports including TV broadcast receiver tuner ports are measured with a common-mode impedance of 150 Ω. This is typically accomplished with the screen terminated by 150 Ω to earth.

AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.10.

The measurement shall cover the entire frequency range.

The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.

Measurement is required at only one EUT supply voltage and frequency.

Applicable to ports listed above and intended to connect to cables longer than 3 m.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value – Limit Value

3.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9KH z-30MHz)(5 m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
7	ISN	Teseq GmbH	ISN T8	30833	Oct. 21, 2017

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

3.3.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- AAN, CP or CVP** at least 80 cm from nearest part of EUT chassis.

NOTE:


- The communication function of EUT was executed and AAN was connected between EUT and associated equipment and the AAN was connected directly to reference ground plane.
Measure the voltage at the measurement port of the AAN
Correct the measured voltage by adding the AAN voltage division factor
Compare the corrected voltage with the limit(**For AAN**)
- Measure the current with a current probe and compare to the current limit(**For CP**)
- The current shall be measured with the current probe and the results compared with the current limits.
The voltage measured shall be corrected at each frequency of interest as follows:
- if the current margin with respect to the current limit is ≤ 6 dB, the actual current margin shall be subtracted from the measured voltage;
-if the current margin with respect to the current limit is >6 dB, 6 dB shall be subtracted from the measured voltage.
The adjusted voltage shall be compared with the applicable voltage limit.
Both the measured current and the corrected voltage shall be below the applicable current and voltage limits at all frequencies for the EUT to be deemed compliant with this publication.(**For CVP**)

3.3.4 DEVIATION FROM TEST STANDARD


No deviation

3.3.5 TEST SETUP


a) Cable Type: Balanced Unscreened, Screened or Coaxial

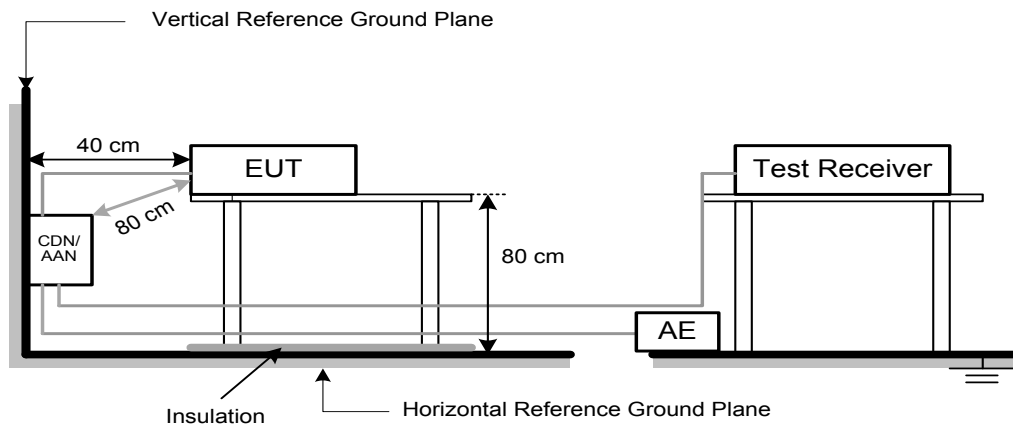

b) Cable Type: Screened or Coaxial

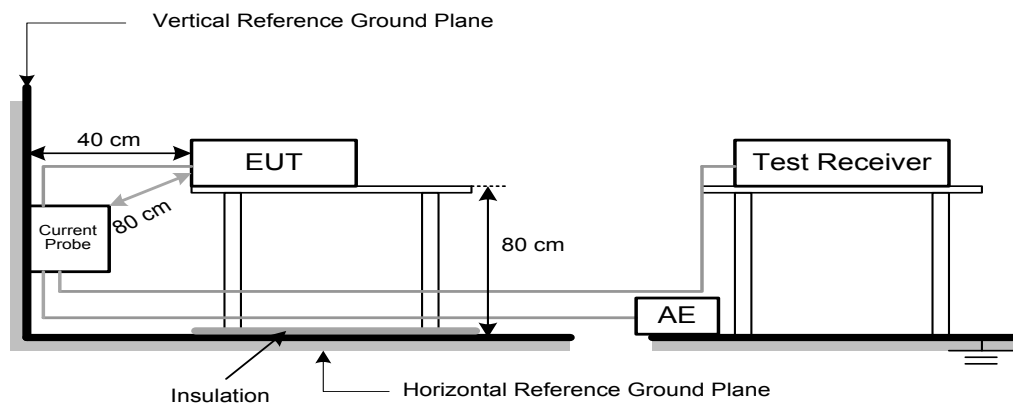


c) Cable Type: Balanced Unscreened, Unbalanced

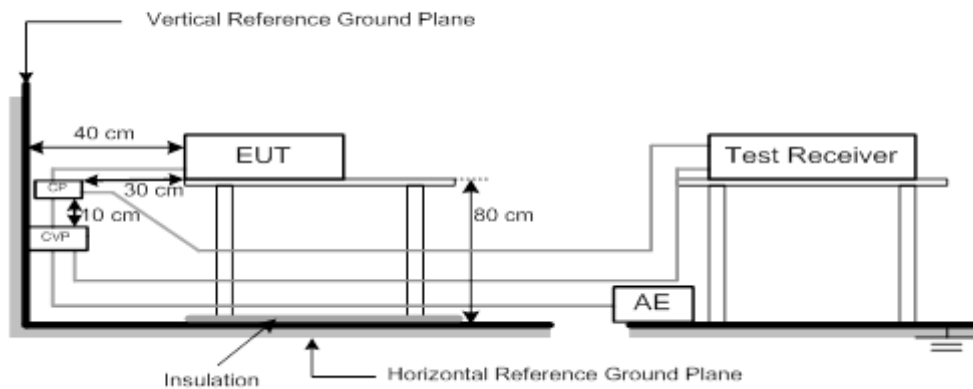

3.3.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 1Gbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

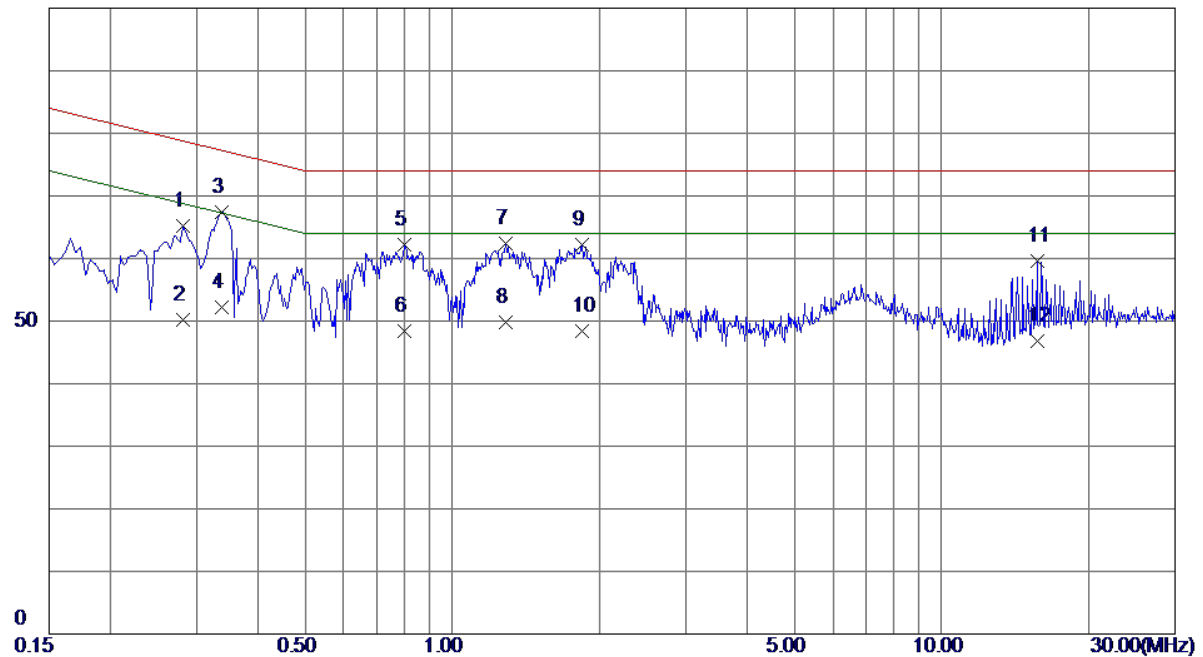

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2819	55.16	9.99	65.15	78.76	-13.61	QP
2	0.2819	40.23	9.99	50.22	68.76	-18.54	AVG
3 *	0.3379	57.50	9.94	67.44	77.25	-9.81	QP
4	0.3379	42.31	9.94	52.25	67.25	-15.00	AVG
5	0.7980	52.41	9.82	62.23	74.00	-11.77	QP
6	0.7980	38.64	9.82	48.46	64.00	-15.54	AVG
7	1.2860	52.59	9.81	62.40	74.00	-11.60	QP
8	1.2860	40.01	9.81	49.82	64.00	-14.18	AVG
9	1.8460	52.38	9.82	62.20	74.00	-11.80	QP
10	1.8460	38.65	9.82	48.47	64.00	-15.53	AVG
11	15.6660	49.40	10.19	59.59	74.00	-14.41	QP
12	15.6660	36.57	10.19	46.76	64.00	-17.24	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 1Gbps		
Note	PoE		
Test Engineer	Simon Ling		


100 dBuV

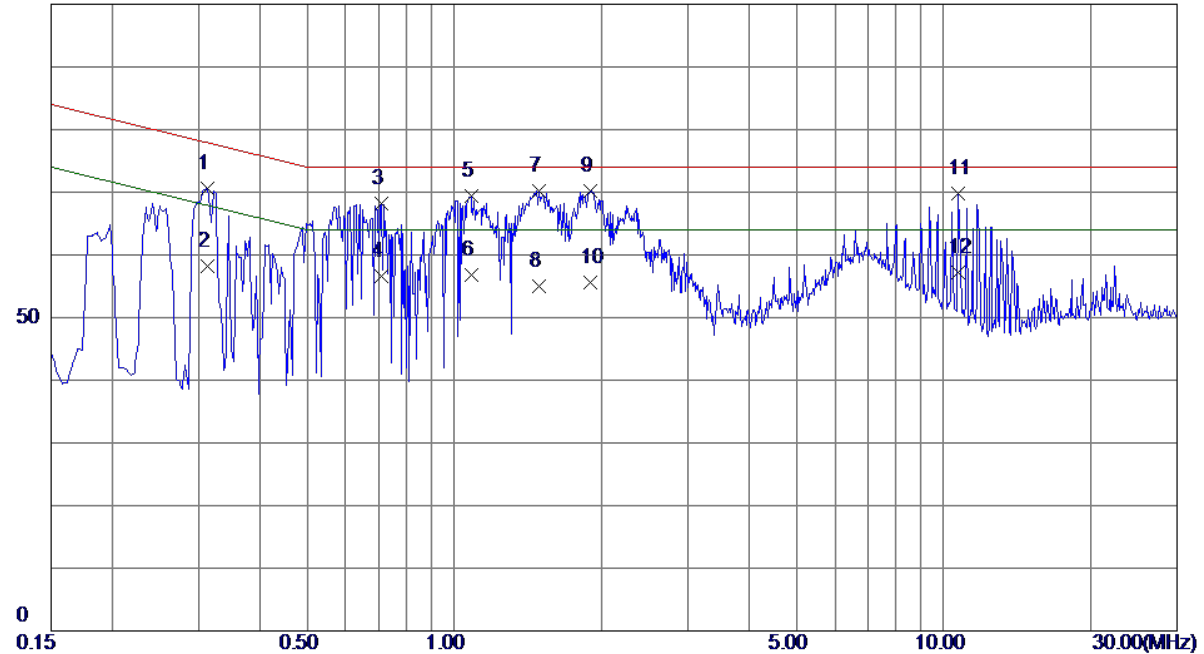

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3140	60.66	9.95	70.61	77.86	-7.25	QP
2	0.3140	48.30	9.95	58.25	67.86	-9.61	AVG
3	0.7100	58.46	9.83	68.29	74.00	-5.71	QP
4	0.7100	46.70	9.83	56.53	64.00	-7.47	AVG
5	1.0820	59.54	9.80	69.34	74.00	-4.66	QP
6	1.0820	46.91	9.80	56.71	64.00	-7.29	AVG
7 *	1.4940	60.43	9.81	70.24	74.00	-3.76	QP
8	1.4940	45.20	9.81	55.01	64.00	-8.99	AVG
9	1.9020	60.31	9.82	70.13	74.00	-3.87	QP
10	1.9020	45.79	9.82	55.61	64.00	-8.39	AVG
11	10.6899	59.77	10.06	69.83	74.00	-4.17	QP
12	10.6899	47.10	10.06	57.16	64.00	-6.84	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 100Mbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

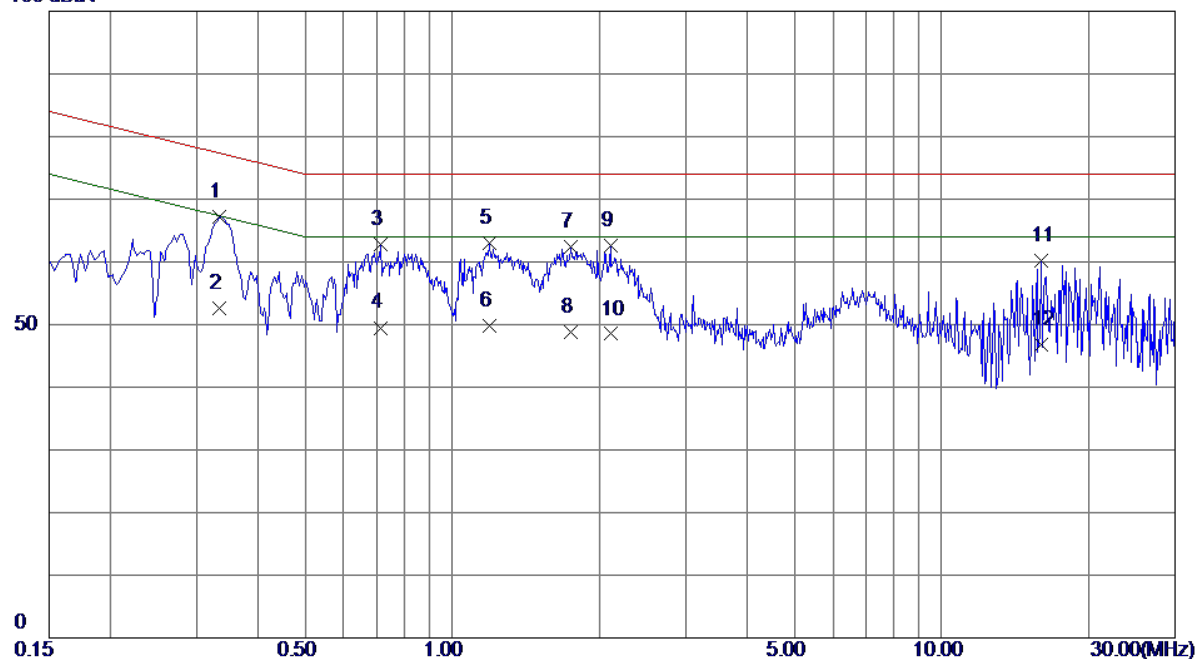

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.3339	57.26	9.94	67.20	77.35	-10.15	QP
2	0.3339	42.67	9.94	52.61	67.35	-14.74	AVG
3	0.7140	52.95	9.83	62.78	74.00	-11.22	QP
4	0.7140	39.67	9.83	49.50	64.00	-14.50	AVG
5	1.1900	53.20	9.80	63.00	74.00	-11.00	QP
6	1.1900	40.03	9.80	49.83	64.00	-14.17	AVG
7	1.7460	52.53	9.81	62.34	74.00	-11.66	QP
8	1.7460	38.97	9.81	48.78	64.00	-15.22	AVG
9	2.1099	52.82	9.82	62.64	74.00	-11.36	QP
10	2.1099	38.68	9.82	48.50	64.00	-15.50	AVG
11	15.9860	49.96	10.21	60.17	74.00	-13.83	QP
12	15.9860	36.57	10.21	46.78	64.00	-17.22	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 100Mbps		
Note	PoE		
Test Engineer	Simon Ling		


100 dBuV

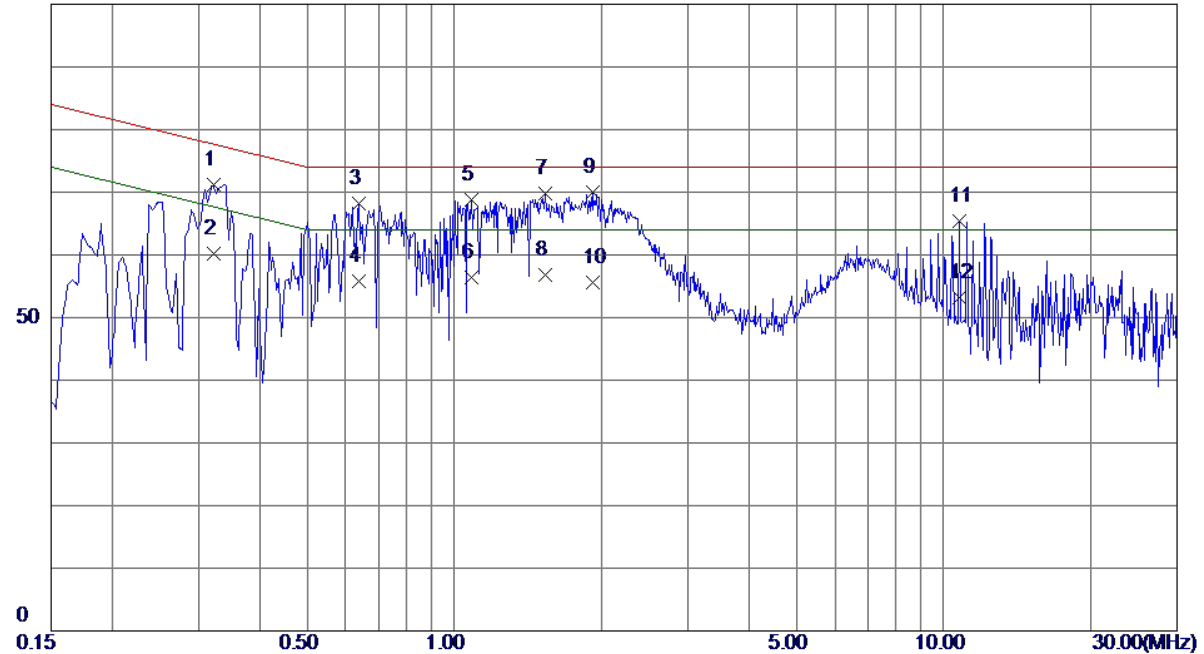

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3220	61.30	9.94	71.24	77.66	-6.42	QP
2	0.3220	50.31	9.94	60.25	67.66	-7.41	AVG
3	0.6380	58.43	9.84	68.27	74.00	-5.73	QP
4	0.6380	45.89	9.84	55.73	64.00	-8.27	AVG
5	1.0859	58.92	9.80	68.72	74.00	-5.28	QP
6	1.0859	46.51	9.80	56.31	64.00	-7.69	AVG
7	1.5339	60.05	9.81	69.86	74.00	-4.14	QP
8	1.5339	46.90	9.81	56.71	64.00	-7.29	AVG
9 *	1.9140	60.27	9.82	70.09	74.00	-3.91	QP
10	1.9140	45.69	9.82	55.51	64.00	-8.49	AVG
11	10.7620	55.41	10.06	65.47	74.00	-8.53	QP
12	10.7620	43.20	10.06	53.26	64.00	-10.74	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 10Mbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

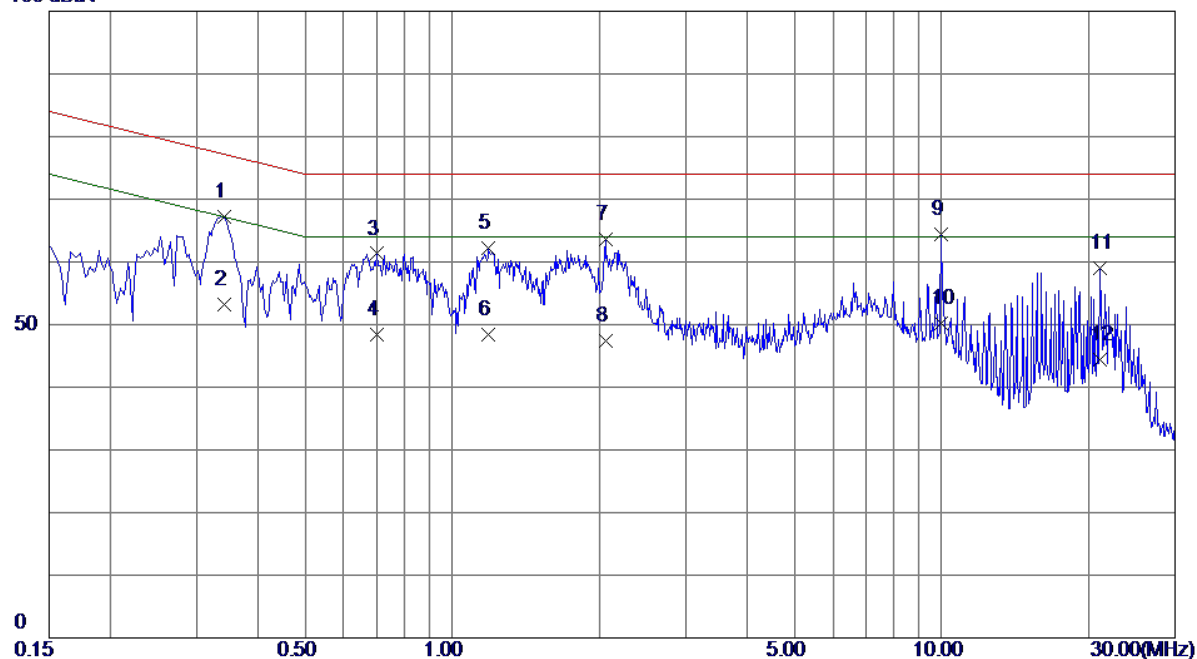

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3420	57.27	9.93	67.20	77.15	-9.95	QP
2	0.3420	43.21	9.93	53.14	67.15	-14.01	AVG
3	0.7019	51.47	9.83	61.30	74.00	-12.70	QP
4	0.7019	38.64	9.83	48.47	64.00	-15.53	AVG
5	1.1860	52.33	9.80	62.13	74.00	-11.87	QP
6	1.1860	38.67	9.80	48.47	64.00	-15.53	AVG
7	2.0540	53.70	9.82	63.52	74.00	-10.48	QP
8	2.0540	37.64	9.82	47.46	64.00	-16.54	AVG
9 *	10.0020	54.33	10.04	64.37	74.00	-9.63	QP
10	10.0020	40.12	10.04	50.16	64.00	-13.84	AVG
11	21.0459	48.55	10.39	58.94	74.00	-15.06	QP
12	21.0459	33.98	10.39	44.37	64.00	-19.63	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	PC Port 10Mbps		
Note	PoE		
Test Engineer	Simon Ling		


100 dBuV

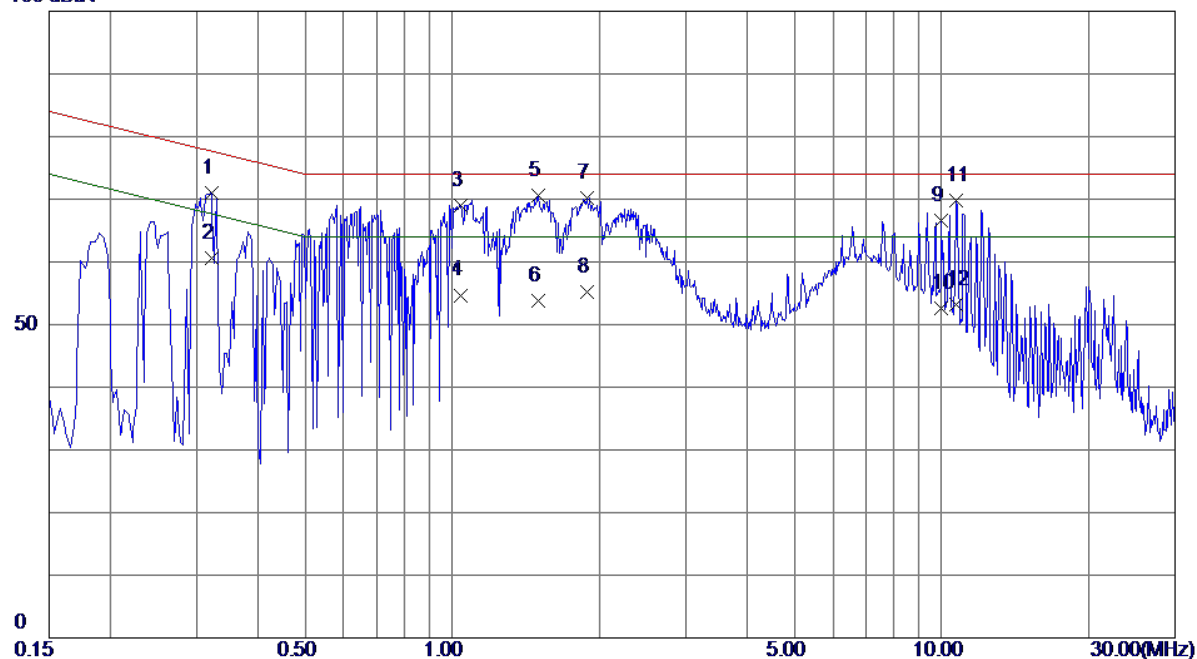

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3220	61.14	9.94	71.08	77.66	-6.58	QP
2	0.3220	50.71	9.94	60.65	67.66	-7.01	AVG
3	1.0420	59.26	9.80	69.06	74.00	-4.94	QP
4	1.0420	44.90	9.80	54.70	64.00	-9.30	AVG
5 *	1.4980	60.83	9.81	70.64	74.00	-3.36	QP
6	1.4980	43.90	9.81	53.71	64.00	-10.29	AVG
7	1.8860	60.41	9.82	70.23	74.00	-3.77	QP
8	1.8860	45.30	9.82	55.12	64.00	-8.88	AVG
9	10.0020	56.58	10.04	66.62	74.00	-7.38	QP
10	10.0020	42.60	10.04	52.64	64.00	-11.36	AVG
11	10.7060	59.65	10.06	69.71	74.00	-4.29	QP
12	10.7060	43.20	10.06	53.26	64.00	-10.74	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 1Gbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

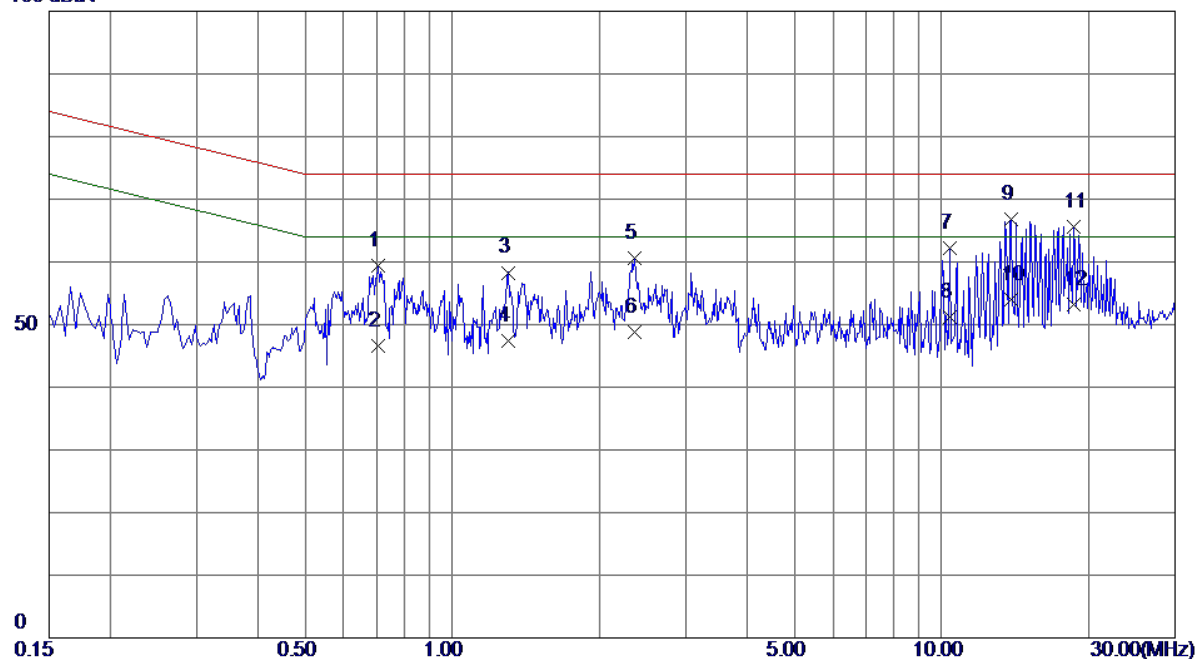

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.7060	49.58	9.83	59.41	74.00	-14.59	QP
2	0.7060	36.80	9.83	46.63	64.00	-17.37	AVG
3	1.2980	48.49	9.81	58.30	74.00	-15.70	QP
4	1.2980	37.50	9.81	47.31	64.00	-16.69	AVG
5	2.3620	50.83	9.83	60.66	74.00	-13.34	QP
6	2.3620	38.90	9.83	48.73	64.00	-15.27	AVG
7	10.3700	52.20	10.05	62.25	74.00	-11.75	QP
8	10.3700	41.20	10.05	51.25	64.00	-12.75	AVG
9 *	13.8460	56.70	10.14	66.84	74.00	-7.16	QP
10	13.8460	43.80	10.14	53.94	64.00	-10.06	AVG
11	18.6380	55.32	10.30	65.62	74.00	-8.38	QP
12	18.6380	42.90	10.30	53.20	64.00	-10.80	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 1Gbps		
Note	PoE		
Test Engineer	Simon Ling		


100 dBuV

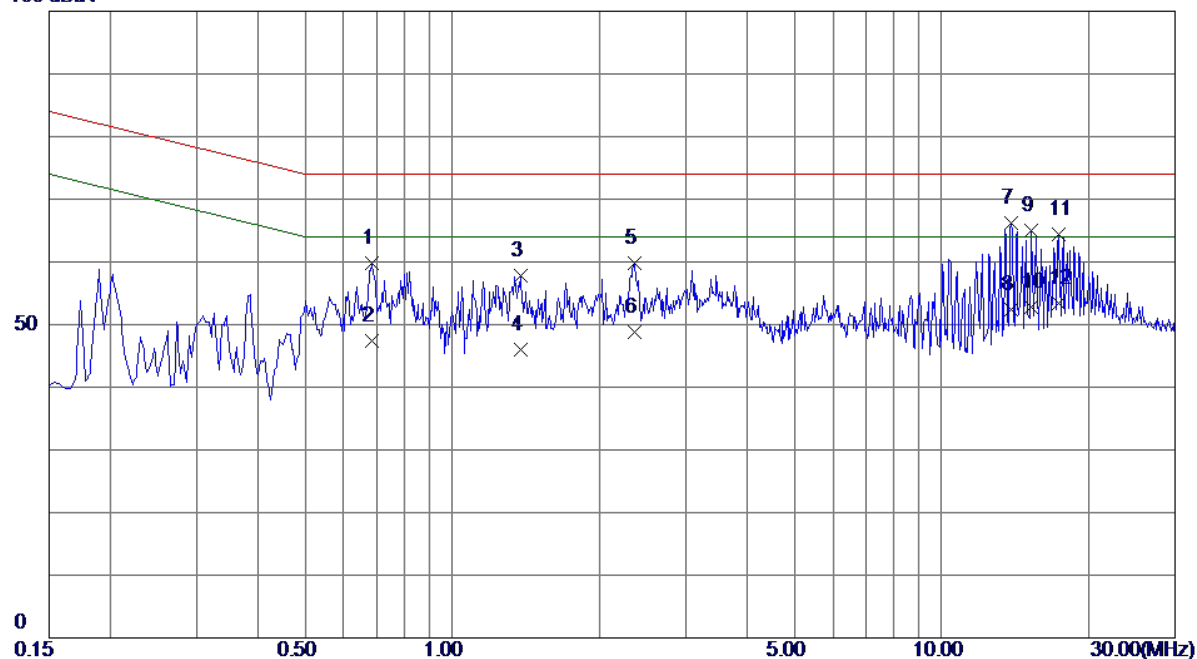

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.6860	49.92	9.83	59.75	74.00	-14.25	QP
2	0.6860	37.60	9.83	47.43	64.00	-16.57	AVG
3	1.3779	47.98	9.81	57.79	74.00	-16.21	QP
4	1.3779	36.20	9.81	46.01	64.00	-17.99	AVG
5	2.3580	49.94	9.83	59.77	74.00	-14.23	QP
6	2.3580	38.90	9.83	48.73	64.00	-15.27	AVG
7 *	13.8780	55.97	10.14	66.11	74.00	-7.89	QP
8	13.8780	42.31	10.14	52.45	64.00	-11.55	AVG
9	15.2140	54.81	10.18	64.99	74.00	-9.01	QP
10	15.2140	42.69	10.18	52.87	64.00	-11.13	AVG
11	17.3140	54.14	10.25	64.39	74.00	-9.61	QP
12	17.3140	43.11	10.25	53.36	64.00	-10.64	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 100Mbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

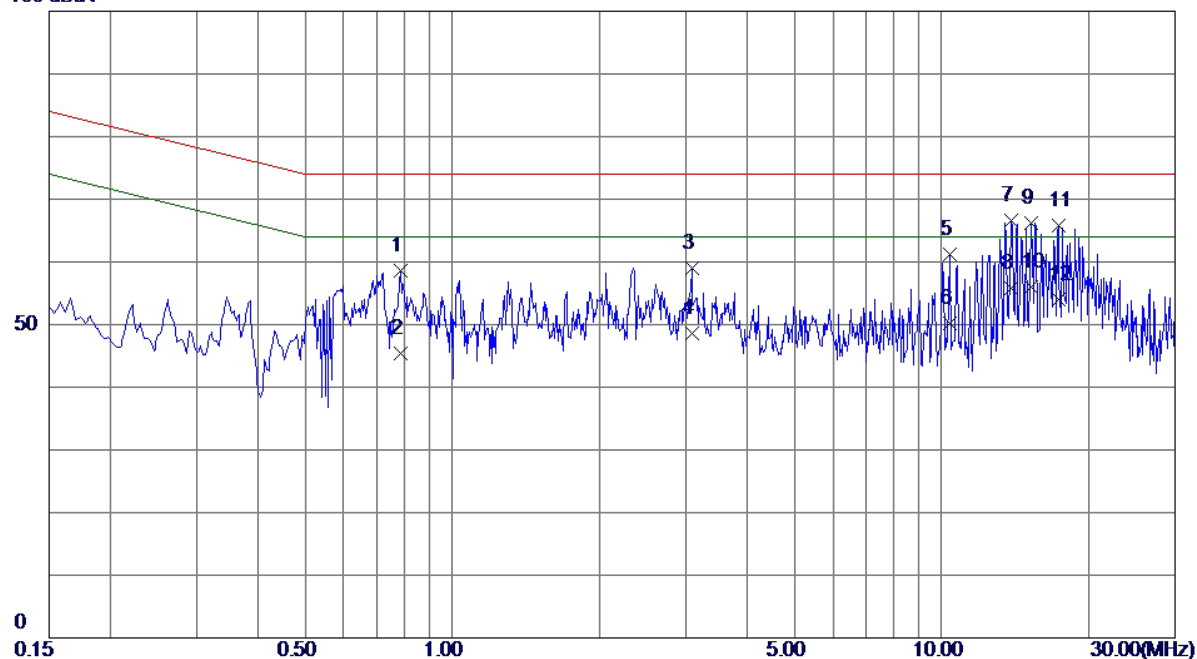

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.7860	48.75	9.82	58.57	74.00	-15.43	QP
2	0.7860	35.60	9.82	45.42	64.00	-18.58	AVG
3	3.0860	49.24	9.85	59.09	74.00	-14.91	QP
4	3.0860	38.70	9.85	48.55	64.00	-15.45	AVG
5	10.3780	51.23	10.05	61.28	74.00	-12.72	QP
6	10.3780	40.20	10.05	50.25	64.00	-13.75	AVG
7 *	13.9060	56.42	10.14	66.56	74.00	-7.44	QP
8	13.9060	45.71	10.14	55.85	64.00	-8.15	AVG
9	15.2020	56.11	10.18	66.29	74.00	-7.71	QP
10	15.2020	45.89	10.18	56.07	64.00	-7.93	AVG
11	17.3020	55.47	10.25	65.72	74.00	-8.28	QP
12	17.3020	43.81	10.25	54.06	64.00	-9.94	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 100Mbps		
Note	PoE		
Test Engineer	Simon Ling		


100 dBuV

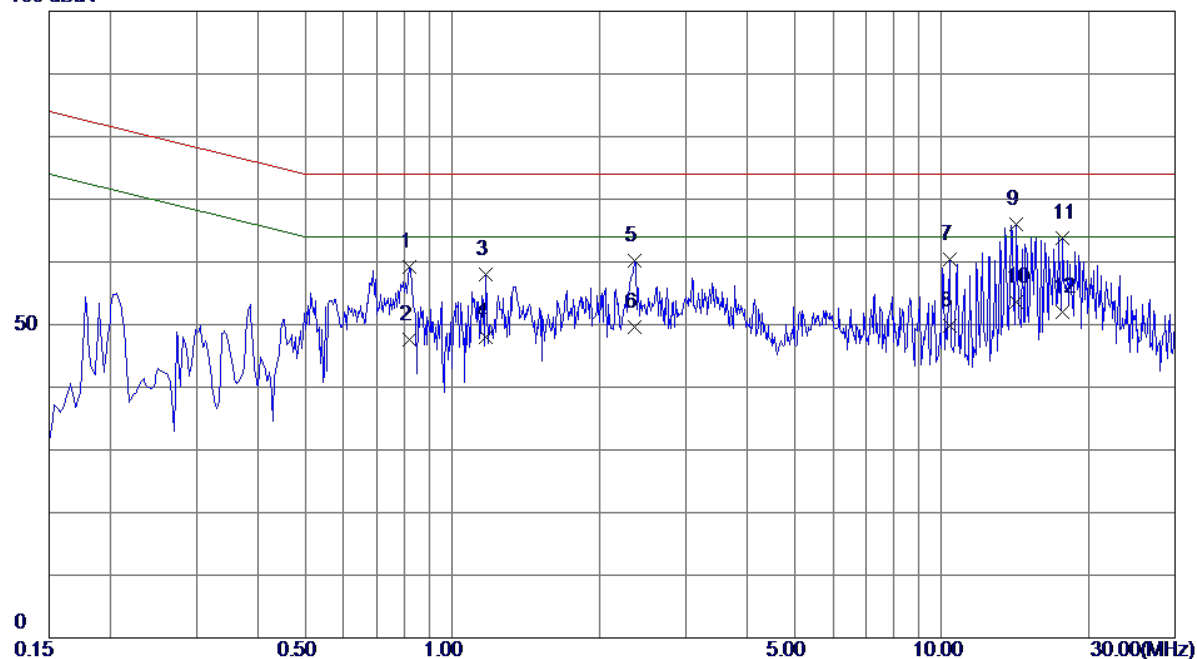

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.8180	49.33	9.82	59.15	74.00	-14.85	QP
2	0.8180	37.80	9.82	47.62	64.00	-16.38	AVG
3	1.1700	48.15	9.80	57.95	74.00	-16.05	QP
4	1.1700	38.20	9.80	48.00	64.00	-16.00	AVG
5	2.3540	50.34	9.83	60.17	74.00	-13.83	QP
6	2.3540	39.80	9.83	49.63	64.00	-14.37	AVG
7	10.3979	50.35	10.05	60.40	74.00	-13.60	QP
8	10.3979	39.70	10.05	49.75	64.00	-14.25	AVG
9 *	14.2140	55.91	10.15	66.06	74.00	-7.94	QP
10	14.2140	43.50	10.15	53.65	64.00	-10.35	AVG
11	17.6940	53.51	10.27	63.78	74.00	-10.22	QP
12	17.6940	41.69	10.27	51.96	64.00	-12.04	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 10Mbps		
Note	Adapter		
Test Engineer	Simon Ling		


100 dBuV

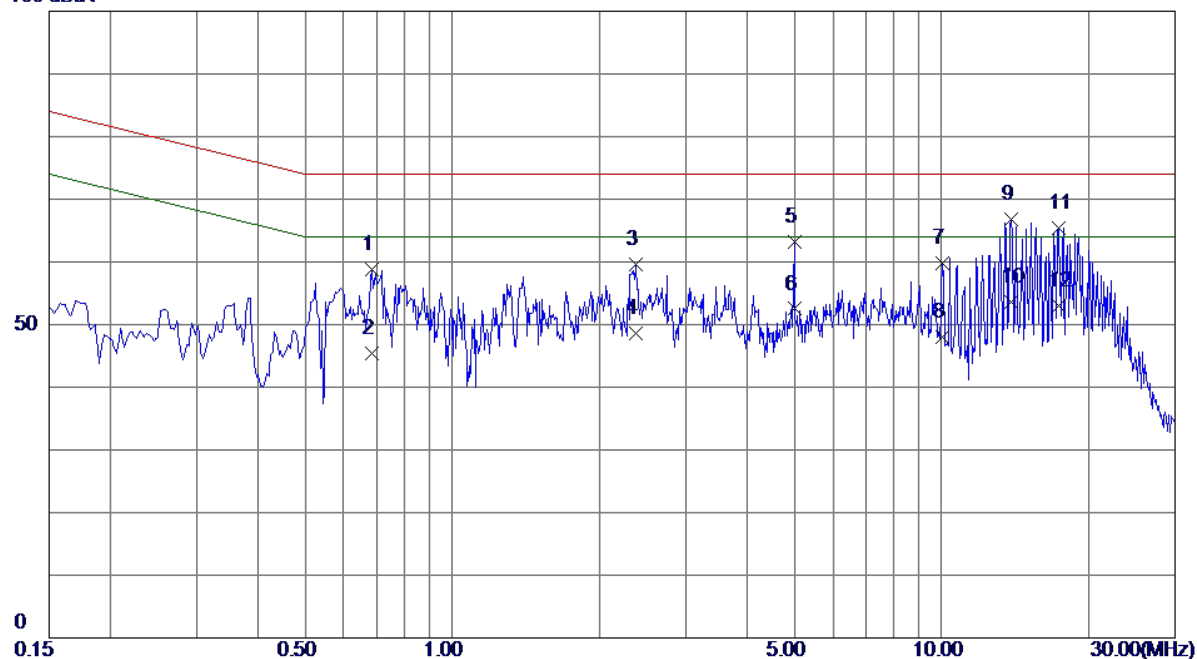

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.6860	48.88	9.83	58.71	74.00	-15.29	QP
2	0.6860	35.60	9.83	45.43	64.00	-18.57	AVG
3	2.3660	49.68	9.83	59.51	74.00	-14.49	QP
4	2.3660	38.70	9.83	48.53	64.00	-15.47	AVG
5	5.0020	53.32	9.90	63.22	74.00	-10.78	QP
6	5.0020	42.60	9.90	52.50	64.00	-11.50	AVG
7	10.0340	49.74	10.04	59.78	74.00	-14.22	QP
8	10.0340	37.90	10.04	47.94	64.00	-16.06	AVG
9 *	13.8500	56.67	10.14	66.81	74.00	-7.19	QP
10	13.8500	43.50	10.14	53.64	64.00	-10.36	AVG
11	17.3140	55.16	10.25	65.41	74.00	-8.59	QP
12	17.3140	42.81	10.25	53.06	64.00	-10.94	AVG

EUT	IP Phone	Model Name	XT-30G
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 230V/50Hz		
Test Mode	Internet Port 10Mbps		
Note	PoE		
Test Engineer	Simon Ling		

100 dBuV

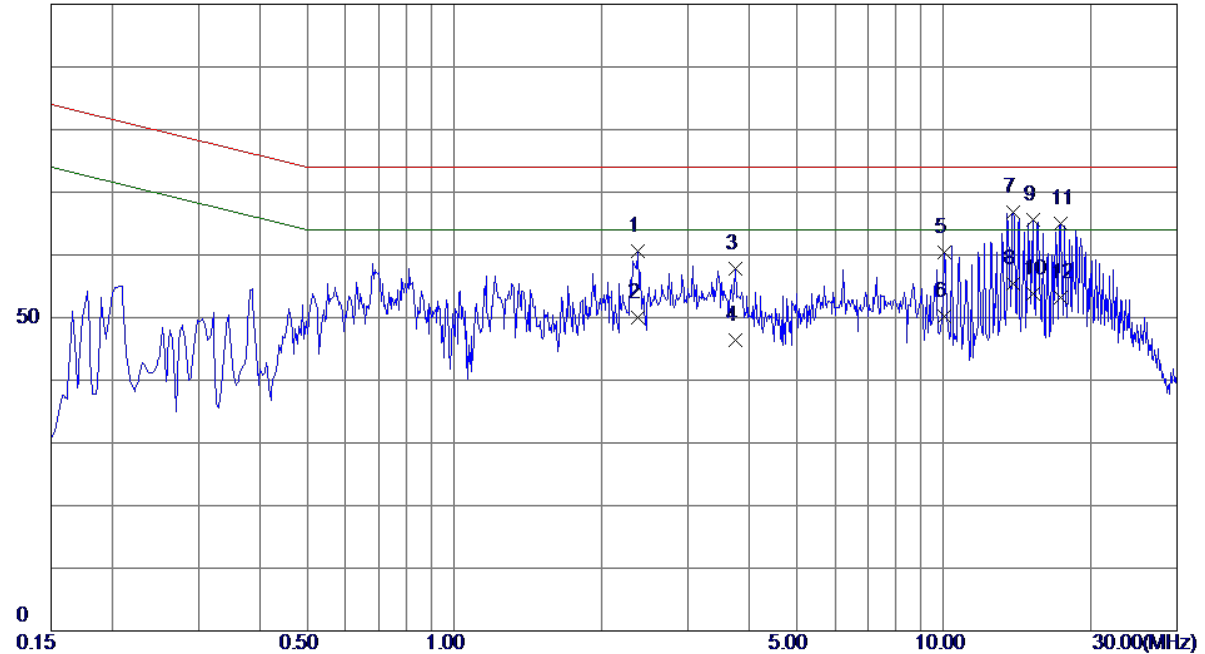

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	2.3660	50.77	9.83	60.60	74.00	-13.40	QP
2	2.3660	40.20	9.83	50.03	64.00	-13.97	AVG
3	3.7500	47.91	9.86	57.77	74.00	-16.23	QP
4	3.7500	36.50	9.86	46.36	64.00	-17.64	AVG
5	10.0340	50.31	10.04	60.35	74.00	-13.65	QP
6	10.0340	40.10	10.04	50.14	64.00	-13.86	AVG
7 *	13.8460	56.70	10.14	66.84	74.00	-7.16	QP
8	13.8460	45.23	10.14	55.37	64.00	-8.63	AVG
9	15.2220	55.47	10.18	65.65	74.00	-8.35	QP
10	15.2220	43.69	10.18	53.87	64.00	-10.13	AVG
11	17.3020	54.69	10.25	64.94	74.00	-9.06	QP
12	17.3020	42.91	10.25	53.16	64.00	-10.84	AVG

3.4 HARMONIC CURRENT EMISSIONS TEST

3.4.1 LIMITS

EN 61000-3-2					
Equipment Category	Harmonic Order	Max. Permissible Harmonic Current	Equipment Category	Harmonic Order	Max. Permissible Harmonic Current
	n	A		n	A mA/w
Class A	Odd Harmonics		Class D	Odd Harmonics only	
	3	2.30		3	2.30 3.4
	5	1.14		5	1.14 1.9
	7	0.77		7	0.77 1.0
	9	0.40		9	0.40 0.5
	11	0.33		11	0.33 0.35
	13	0.21		13	0.21 0.30
	15≤n≤39	0.15 x 15/n		15≤n≤39	0.15 x 15/n 3.85/n
	Even Harmonics				
	2	1.08			
	4	0.43			
	6	0.30			
	8≤n≤40	0.23 x 8/n			

3.4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 26, 2017
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 26, 2017
3	Measurement Software	California	CTS4.0 Version 4.9	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.4.3 TEST PROCEDURE

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to of EN 61000-3-2. The EUT is classified as follows:
 - Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
 - Class B: Portable tools; Arc welding equipment which is not professional equipment.
 - Class C: Lighting equipment.
 - Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.4.4 DEVIATION FROM TEST STANDARD

No deviation


3.4.5 TEST SETUP

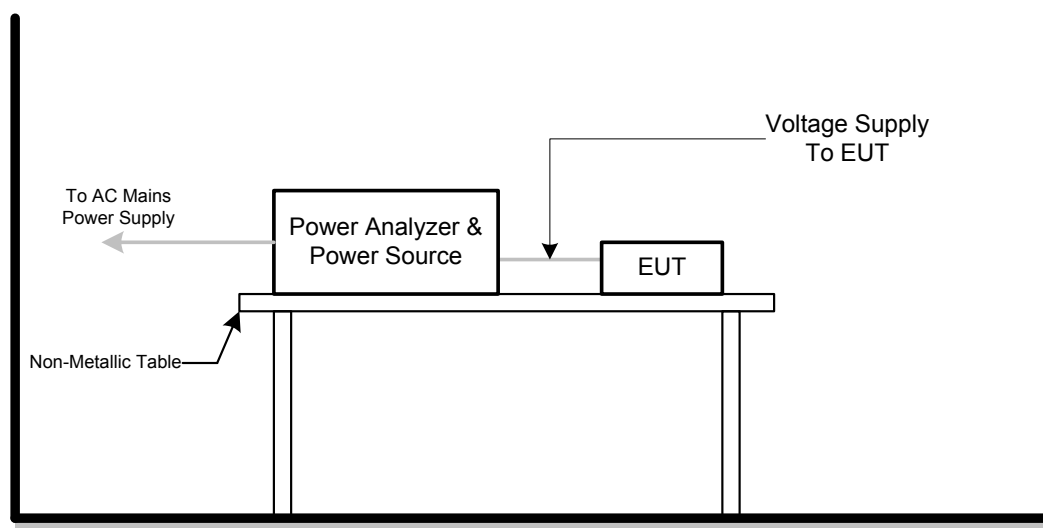


3.4.6 TEST RESULTS

Harmonic - Class A			
EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

Current & voltage waveforms

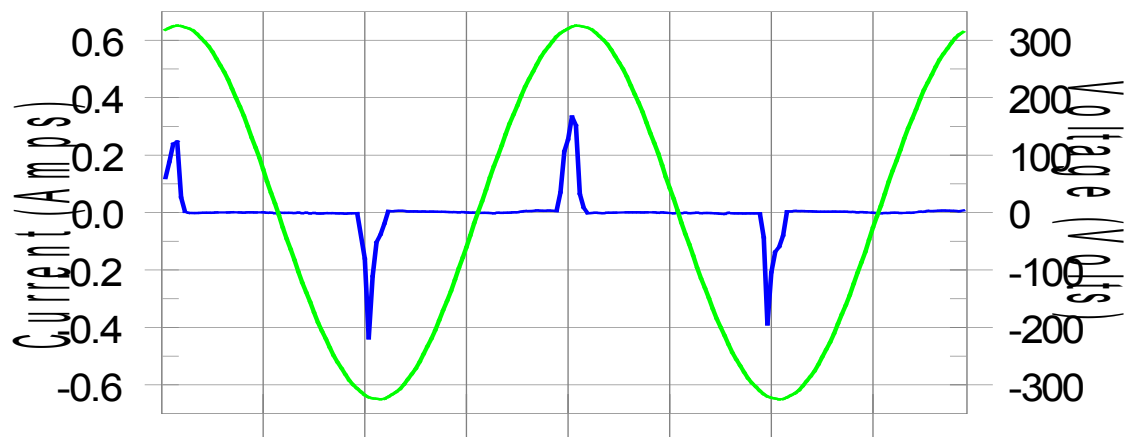

Harmonics and Class A limit line European Limits

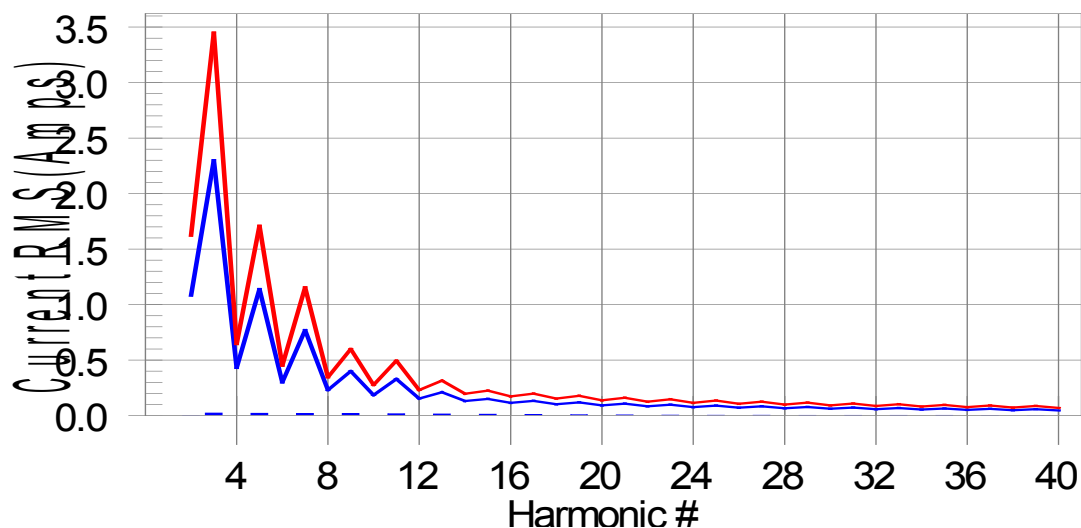

Test result: Pass Worst harmonic was #15 with 6.1% of the limit.

Current Test Result Summary (Run time)			
EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

Highest parameter values during test:

V_RMS (Volts): 230.01	Frequency(Hz): 50.00
I_Peak (Amps): 0.543	I_RMS (Amps): 0.080
I_Fund (Amps): 0.028	Crest Factor: 7.386
Power (Watts): 6.3	Power Factor: 0.402

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.002	1.620	N/A	Pass
3	0.023	2.300	1.0	0.028	3.450	0.8	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.022	1.140	1.9	0.026	1.710	1.5	Pass
6	0.000	0.300	N/A	0.001	0.450	N/A	Pass
7	0.020	0.770	2.7	0.024	1.155	2.0	Pass
8	0.000	0.230	N/A	0.001	0.345	N/A	Pass
9	0.019	0.400	4.7	0.022	0.600	3.6	Pass
10	0.000	0.184	N/A	0.001	0.276	N/A	Pass
11	0.017	0.330	5.1	0.019	0.495	3.9	Pass
12	0.000	0.153	N/A	0.000	0.230	N/A	Pass
13	0.015	0.210	7.0	0.016	0.315	5.2	Pass
14	0.000	0.131	N/A	0.000	0.197	N/A	Pass
15	0.013	0.150	8.4	0.014	0.225	6.1	Pass
16	0.000	0.115	N/A	0.000	0.173	N/A	Pass
17	0.010	0.132	7.9	0.011	0.198	5.7	Pass
18	0.000	0.102	N/A	0.000	0.153	N/A	Pass
19	0.008	0.118	7.1	0.009	0.178	5.0	Pass
20	0.000	0.092	N/A	0.000	0.138	N/A	Pass
21	0.007	0.107	6.2	0.007	0.161	4.3	Pass
22	0.000	0.084	N/A	0.000	0.125	N/A	Pass
23	0.005	0.098	5.3	0.005	0.147	3.7	Pass
24	0.000	0.077	N/A	0.000	0.115	N/A	Pass
25	0.004	0.090	N/A	0.004	0.135	N/A	Pass
26	0.000	0.071	N/A	0.000	0.107	N/A	Pass
27	0.003	0.083	N/A	0.004	0.125	N/A	Pass
28	0.000	0.066	N/A	0.000	0.099	N/A	Pass
29	0.003	0.078	N/A	0.003	0.116	N/A	Pass
30	0.000	0.061	N/A	0.000	0.092	N/A	Pass
31	0.003	0.073	N/A	0.003	0.109	N/A	Pass
32	0.000	0.058	N/A	0.000	0.086	N/A	Pass
33	0.002	0.068	N/A	0.003	0.102	N/A	Pass
34	0.000	0.054	N/A	0.000	0.081	N/A	Pass
35	0.002	0.064	N/A	0.003	0.096	N/A	Pass
36	0.000	0.051	N/A	0.000	0.077	N/A	Pass
37	0.002	0.061	N/A	0.002	0.091	N/A	Pass
38	0.000	0.048	N/A	0.000	0.073	N/A	Pass
39	0.002	0.058	N/A	0.002	0.087	N/A	Pass
40	0.000	0.046	N/A	0.000	0.069	N/A	Pass

Voltage Source Verification Data (Run time)			
EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

Highest parameter values during test:

Voltage (Vrms):230.01

Frequency(Hz): 50.00

I_Peak (Amps):0.543

I_RMS (Amps): 0.080

I_Fund (Amps):0.028

Crest Factor: 7.386

Power (Watts): 6.3

Power Factor: 0.402

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.142	0.460	30.94	OK
3	0.651	2.070	31.48	OK
4	0.053	0.460	11.62	OK
5	0.132	0.920	14.30	OK
6	0.023	0.460	4.95	OK
7	0.039	0.690	5.63	OK
8	0.016	0.460	3.51	OK
9	0.031	0.460	6.70	OK
10	0.016	0.460	3.59	OK
11	0.025	0.230	11.07	OK
12	0.012	0.230	5.28	OK
13	0.017	0.230	7.33	OK
14	0.009	0.230	3.77	OK
15	0.017	0.230	7.54	OK
16	0.012	0.230	5.40	OK
17	0.007	0.230	2.98	OK
18	0.011	0.230	4.99	OK
19	0.015	0.230	6.57	OK
20	0.015	0.230	6.63	OK
21	0.007	0.230	2.94	OK
22	0.013	0.230	5.71	OK
23	0.012	0.230	5.05	OK
24	0.006	0.230	2.68	OK
25	0.007	0.230	3.19	OK
26	0.008	0.230	3.39	OK
27	0.008	0.230	3.67	OK
28	0.007	0.230	3.08	OK
29	0.010	0.230	4.30	OK
30	0.005	0.230	2.36	OK
31	0.006	0.230	2.40	OK
32	0.005	0.230	2.02	OK
33	0.009	0.230	4.09	OK
34	0.003	0.230	1.16	OK
35	0.003	0.230	1.49	OK
36	0.003	0.230	1.41	OK
37	0.007	0.230	3.18	OK
38	0.003	0.230	1.11	OK
39	0.003	0.230	1.33	OK
40	0.005	0.230	2.35	OK

3.5 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER TEST

3.5.1 LIMITS

Tests	Limits	Descriptions
	EN 61000-3-3	
Pst	≤ 1.0 , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	≤ 0.65 , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	Maximum Relative V-change
d (t)	≤ 500 ms	Relative V-change characteristic

3.5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Harmonics and Flicker Analyzer	California Instruments	PACS-1	72344	Jul. 26, 2017
2	3KVA AC Power source	California Instruments	3001ix	56309	Jul. 26, 2017
3	Measurement Software	California	CTS4.0 Version 4.9	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


3.5.3 TEST PROCEDURE

- Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in EN 61000-3-3 depend on which standard adopted for compliance measurement.
- All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.5.4 DEVIATION FROM TEST STANDARD

No deviation

3.5.5 TESTSETUP

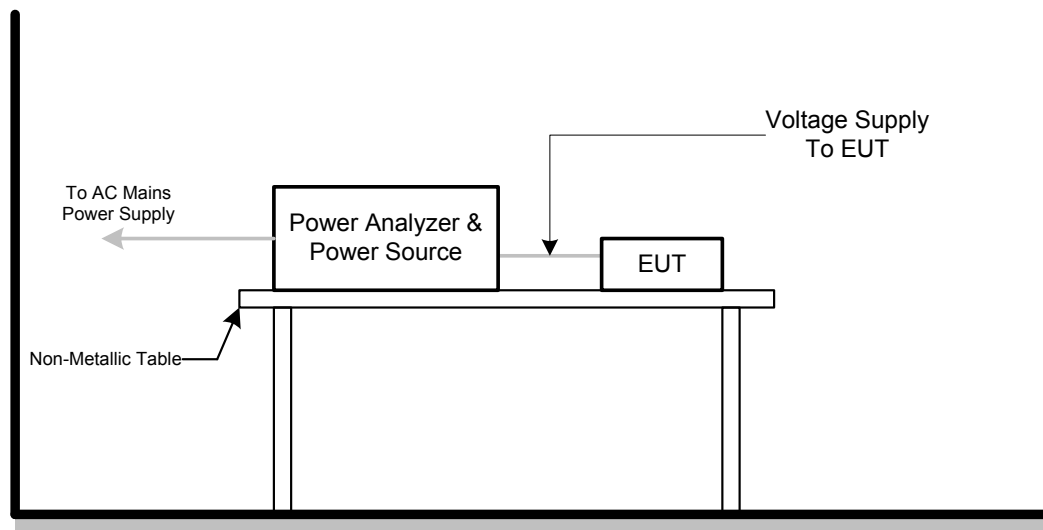


3.5.6 TEST RESULTS


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

Psti and limit line

European Limits

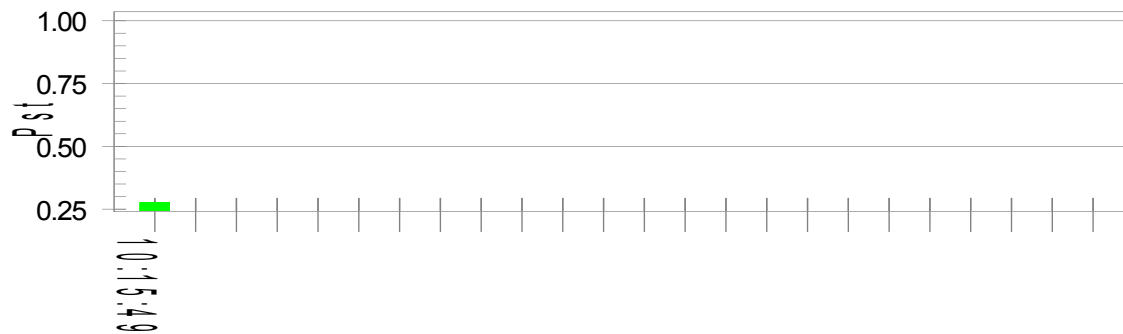

Plt and limit line

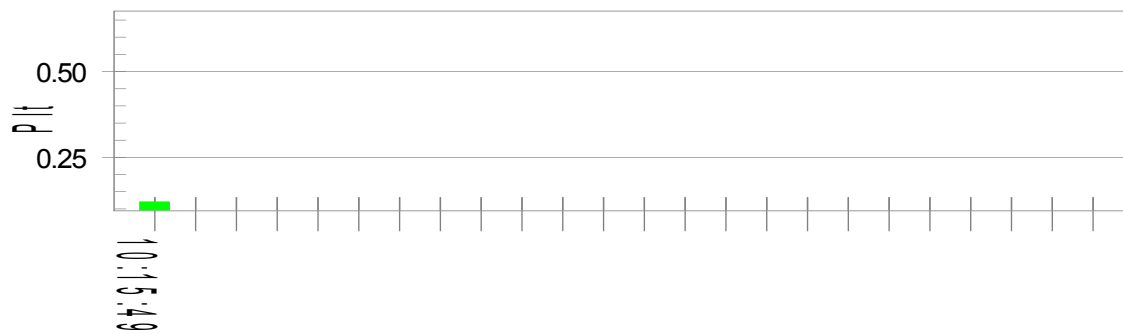

Parameter values recorded during the test:

Vrms at the end of test (Volt):229.95

Highest dt (%):	0.00	Test limit (%):	N/A	N/A
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	-0.05	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.277	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.121	Test limit:	0.650	Pass

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SEVERITY LEVEL/CRITERIA

Tests Standard No.	Test Specification Level / Test Mode	Test Ports	Criteria
Electrostatic discharge EN 61000-4-2 (ESD)	±8 kV air discharge ±4 kV contact discharge (Direct Mode)	Enclosure	B
	±4kV HCP discharge ±4kV VCP discharge (Indirect Mode)	Enclosure	B
Radiated, radio-frequency, electromagnetic field immunity EN 61000-4-3 (RS)	80 MHz to 1000 MHz 3V/m(unmodulated, r.m.s), 1 kHz, 80%, AM modulated	Enclosure	A
Electrical fast transient/burst immunity EN 61000-4-4 (EFT/Burst)	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency (100kHz Repetition Frequency for xDSL equipment)	Signal ports and telecommunication ports (Only applicable to cable length>3 m)	B
	±0.5kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	DC Power Ports	B
	±1 kV(peak) 5/50ns Tr/Th 5kHz Repetition Frequency	AC Power Ports	B
Surge immunity EN 61000-4-5 (Surges)	±1 kV(peak) 10/700 Tr/Th µs(NOTE) (without primary protection)	Signal ports and telecommunication ports (applicable only to ports connect directly to outdoor cables)	C
	±4 kV(peak) 10/700 Tr/Th µs(NOTE) (with primary protectors fitted)		C
	±0.5 kV(peak) 1.2/50(8/20) Tr/Th µs	DC Power Ports (applicable only to ports connect directly to outdoor cables)	B
	±1 kV(peak) 1.2/50(8/20) Tr/Th µs (line to line)	AC Power Ports	B
	±2 kV(peak) 1.2/50(8/20) Tr/Th µs (line to earth or ground)		B

Immunity to conducted disturbances, induced by radio-frequency fields EN 61000-4-6 (Injected Current)	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	Signal ports and telecommunication ports (Only applicable to cable length>3 m)	A
	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	DC Power Ports	A
	0.15 MHz to 80 MHz 3V(unmodulated, r.m.s), 1kHz 80%, AM 150Ω source impedance	AC Power Ports	A
Power frequency magnetic field immunity EN 61000-4-8 (PFMF)	50 Hz or 60Hz, 1A/m(r.m.s) μs	Enclosure	A
Voltage dips, short interruptions and voltage variations immunity EN 61000-4-11 (Voltage Interruption/Dips)	Voltage reduction > 95% 0.5 period Voltage reduction 30% 25 periods Voltage reduction > 95% 250 periods	AC Power Ports	B C C

Note.

Where the coupling network for the 10/700 μs waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) μs waveform and appropriate coupling network.

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN55024** standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator Intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state if stored data allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

4.3.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-2
Discharge Impedance	330 ohm / 150 pF
Required Performance	B
Discharge Voltage	Air Discharge: ± 2 kV, ± 4 kV, ± 8 kV (Direct) Contact Discharge: ± 2 kV, ± 4 kV (Direct/Indirect)
Polarity	Positive & Negative
Number of Discharge	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total
Discharge Mode	Single Discharge
Discharge Period	1 second minimum

4.3.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	ESD Generator	TESEQ AG	NSG 437	450	Nov. 03, 2017

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.3.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- Contact discharge was applied to conductive surfaces (Direct) and coupling planes (Indirect) of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

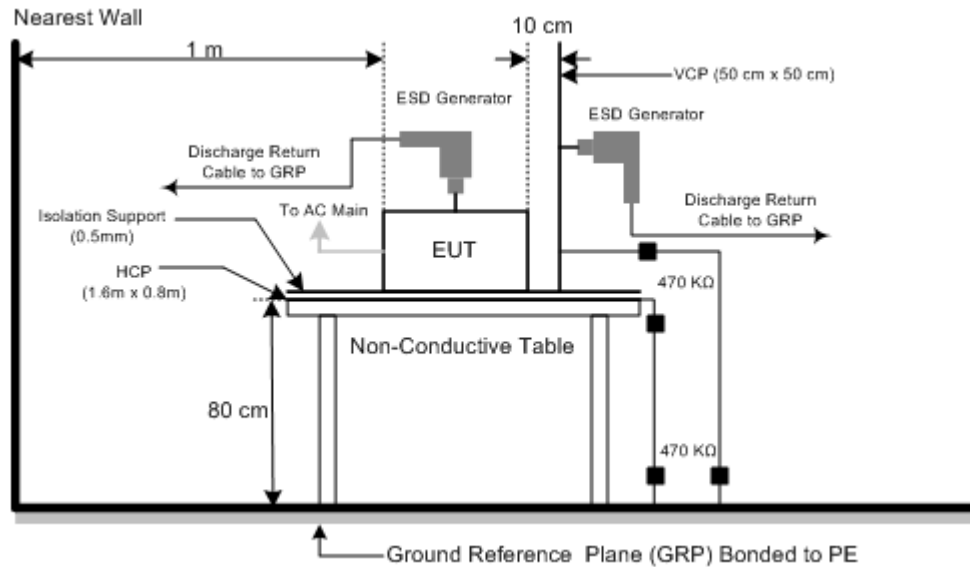

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test was installed in a representative system as described in EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.3.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	48%
Test Voltage	AC 230V/50Hz	Pressure	1010hPa
Test Mode	Handfree+vedio+HDMI out (PoE),Handfree+vedio+HDMI out (Adapter),Handset+vedio+HDMI out (Adapter),Earphone+vedio+HDMI out(Adapter),Play vedio+storage R/W+HDMI out(Adapter)		


Mode	Air Discharge								Contact Discharge					
	2kV		4kV		8kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	A	A	-	-	A	A	A	A	-	-
2	A	A	A	A	A	A	-	-	-	-	-	-	-	-
3	A	A	A	A	A	A	-	-	-	-	-	-	-	-
4	A	A	A	A	A	A	-	-	-	-	-	-	-	-
5	A	A	A	A	B	B	-	-	-	-	-	-	-	-
6	A	A	A	A	A	A	-	-	-	-	-	-	-	-
7	A	A	A	A	A	A	-	-	-	-	-	-	-	-
8	A	A	A	A	A	A	-	-	-	-	-	-	-	-
9	A	A	A	A	A	A	-	-	-	-	-	-	-	-
10	A	A	A	A	B	B	-	-	-	-	-	-	-	-
11	A	A	A	A	A	A	-	-	-	-	-	-	-	-
12	A	A	A	A	B	B	-	-	-	-	-	-	-	-
13	A	A	A	A	A	A	-	-	-	-	-	-	-	-
14	A	A	A	A	A	A	-	-	-	-	-	-	-	-
Criteria	B						-		B				-	
Result	B						-		A				-	
Judgment	PASS						-		PASS				-	



Mode	HCP Contact Discharge						VCP Contact Discharge					
	2kV		4kV		- kV		2kV		4kV		- kV	
Location	P	N	P	N	P	N	P	N	P	N	P	N
1	A	A	A	A	-	-	A	A	A	A	-	-
2	A	A	A	A	-	-	A	A	A	A	-	-
3	A	A	A	A	-	-	A	A	A	A	-	-
4	A	A	A	A	-	-	A	A	A	A	-	-
Criteria	B				-		B				-	
Result	A				-		A				-	
Judgment	PASS				-		PASS				-	



Note:


- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:
Direct/Indirect(HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at eachpoint.
Air discharges: Minimum 20 times (Positive/Negative) at each point.
- 3) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 4) The Indirect (HCP/VCP) discharges description of test point as following:
1.left side; 2.right side; 3.front side; 4.rear side.
- 5) N/A - denotes test is not applicable in this test report
- 6) Criterion A: No observation of any performance degradation.
- 7) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 8) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

PHOTO(S) SHOWN THE LOCATION(S) OF ESD EVALUATED

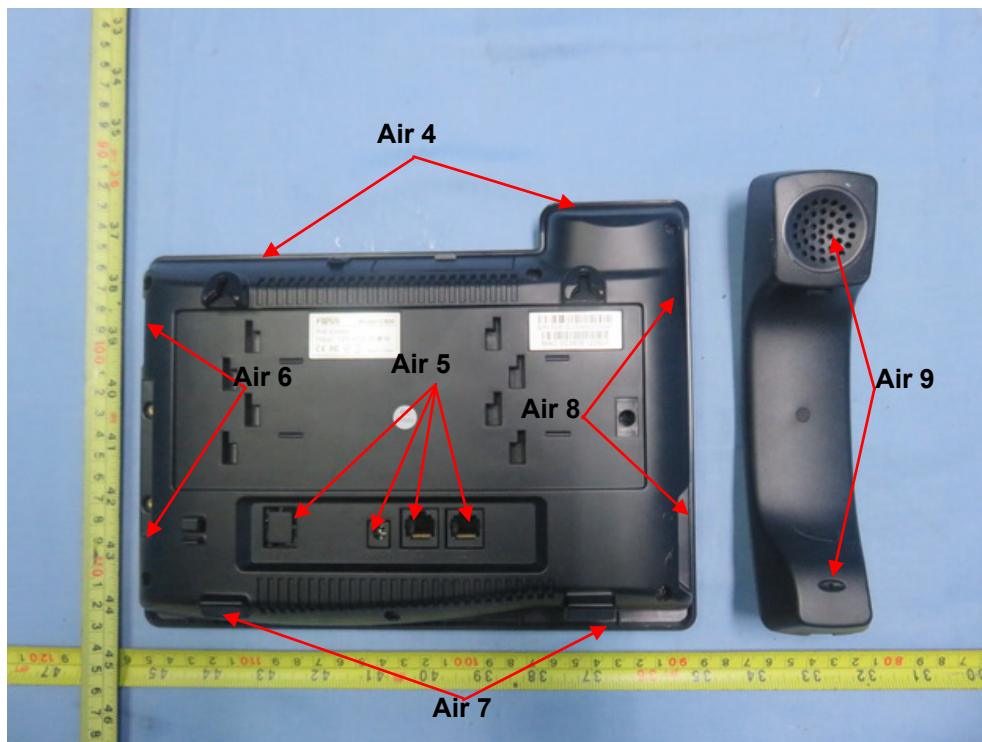

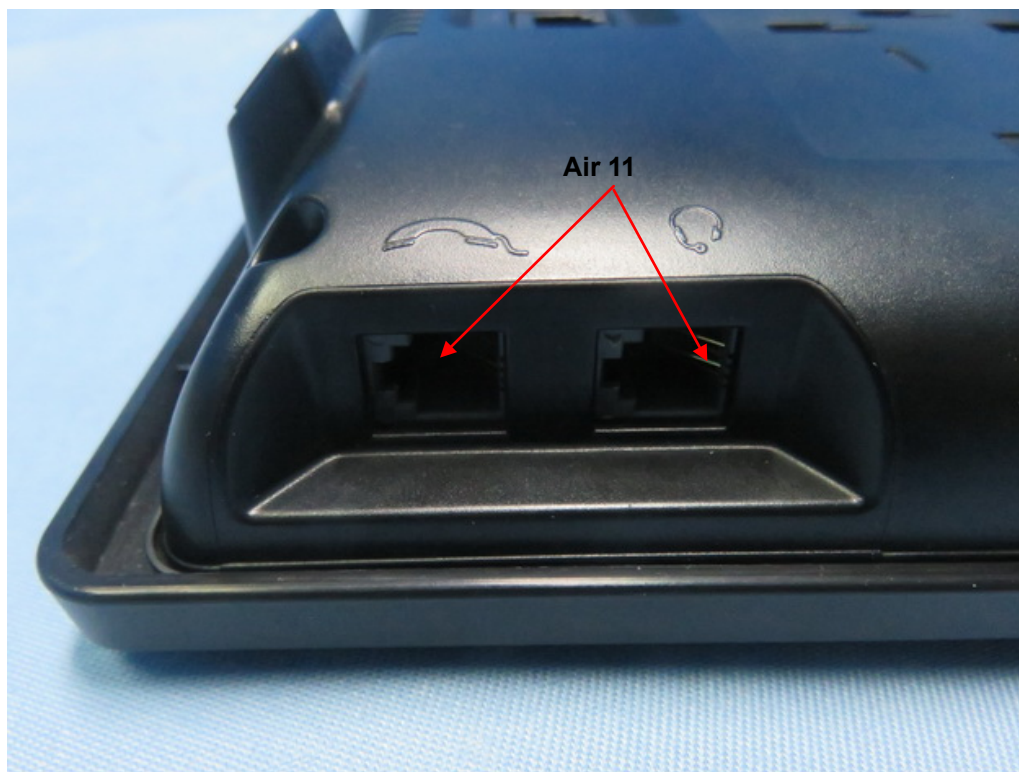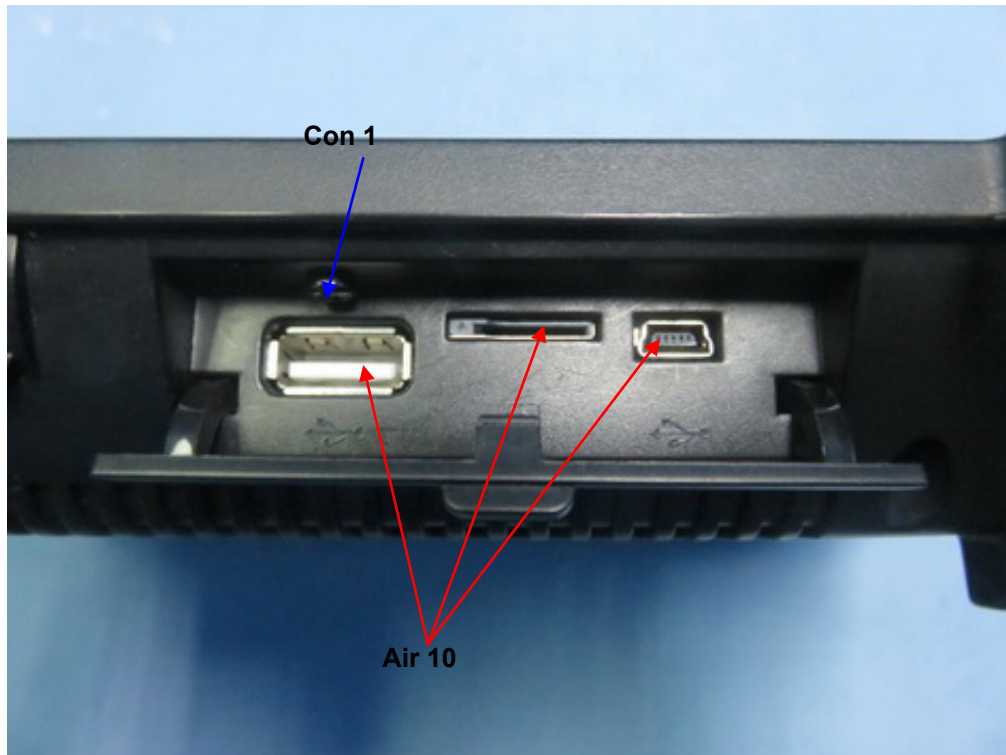

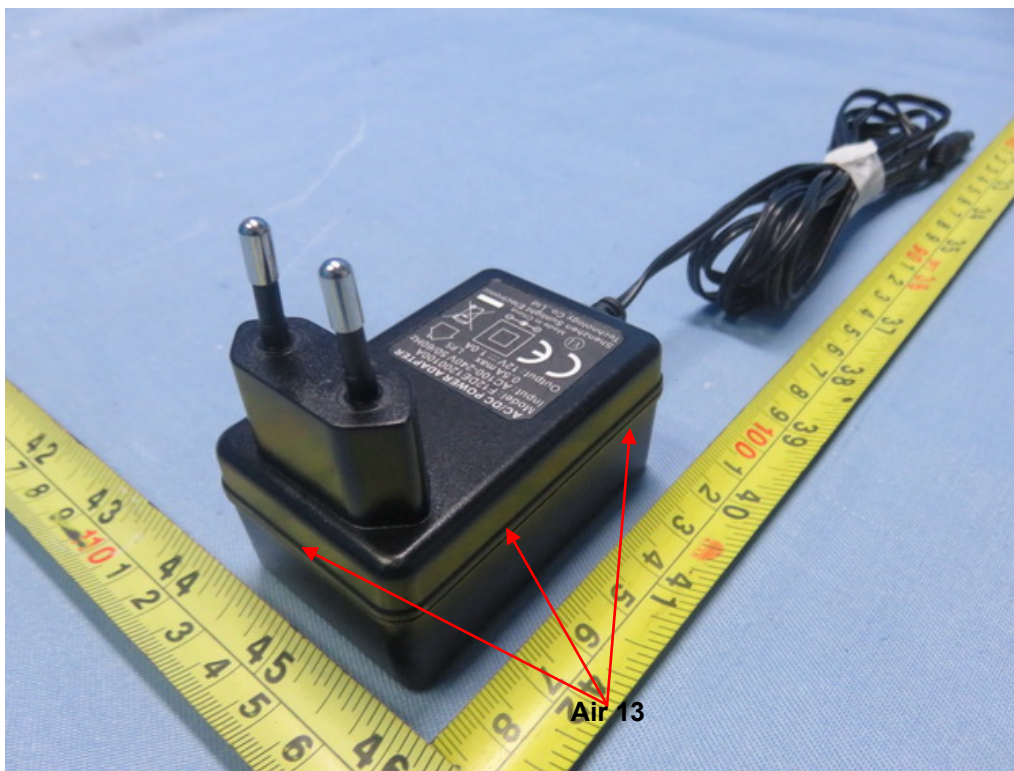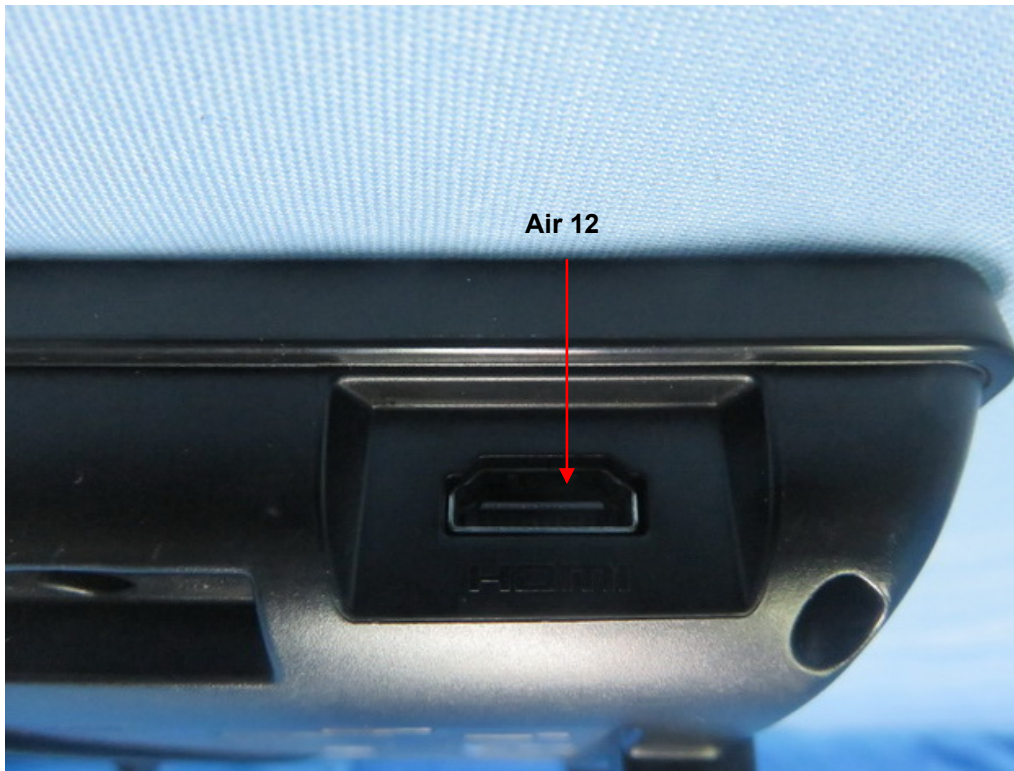

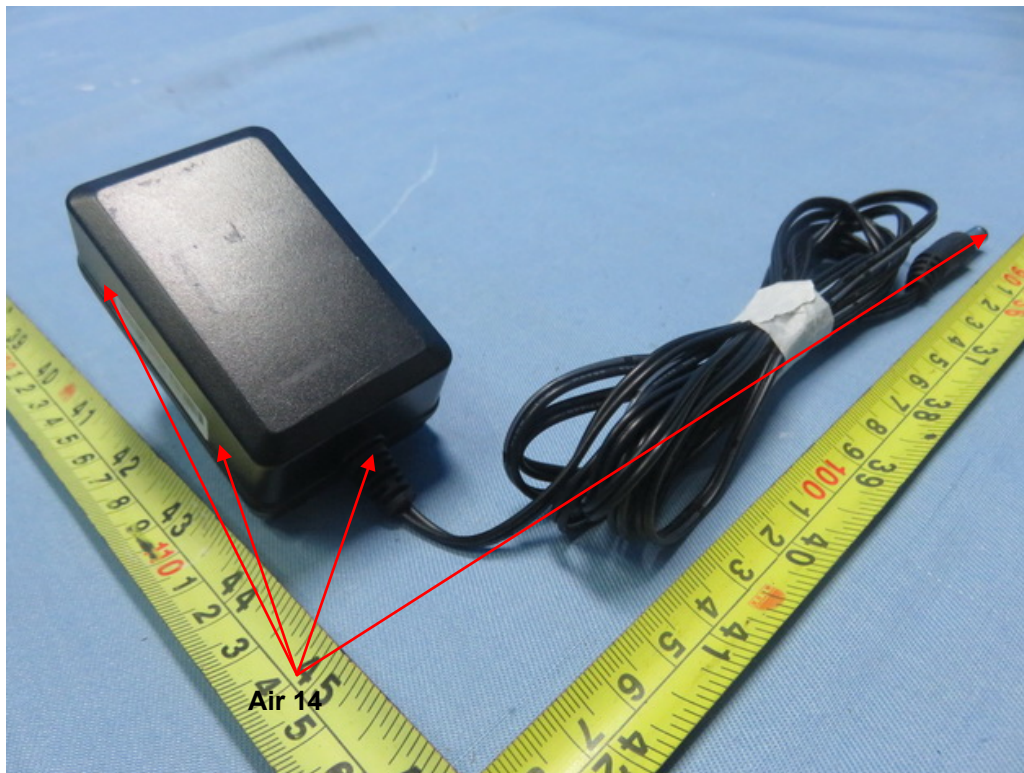

4.4 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

4.4.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-3
Required Performance	A
Frequency Range	80 MHz - 1000 MHz
Field Strength	3 V/m(unmodulated, r.m.s)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Polarity of Antenna	Horizontal and Vertical
Test Distance	3 m
Antenna Height	1.55 m
Dwell Time	at least 3 seconds

4.4.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142C	00047662	Mar. 26, 2018
2	Digital Signal Generator	HP	ESG-D3000A	US36260188	Mar. 26, 2018
3	Power amplifier	MILMEGA	80RF1000-250	1064833	Nov. 02, 2017
4	Measurement Software	TOYO	IM5/R Ver 3.8.050	N/A	N/A
5	Audio Test System	Audio precision	ATS-1ACCESS	ATS1-45376	Mar. 26, 2018
6	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 27, 2017
7	Free-field 1/2" Microphone	B&K	4190-L-001	2913343	Dec. 23, 2017

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.4.3 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.


The other condition as following manner:

- The field strength level was 3 V/m(unmodulated, r.m.s).
- The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

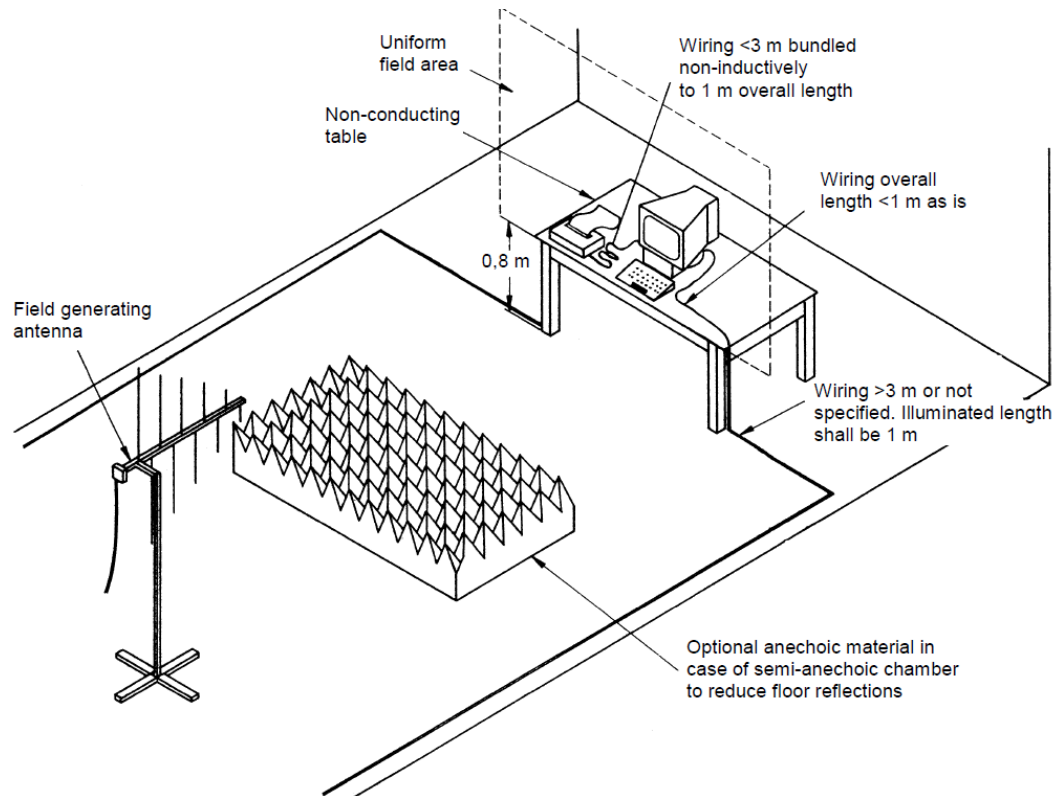

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

4.4.6 TEST RESULTS


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	51%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (PoE),Handfree+vedio+HDMI out (Adapter),Handset+vedio+HDMI out (Adapter),Earphone+vedio+HDMI out(Adapter),Play vedio+storage R/W+HDMI out(Adapter)		

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Criterion	Result	Judgment
80 - 1000	H / V	3V (unmodulated, r.m.s) AM Modulated 1000Hz, 80%	0	A	A	PASS
			90			
			180			
			270			


Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report.
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Front Vertical		
Note	PoE		

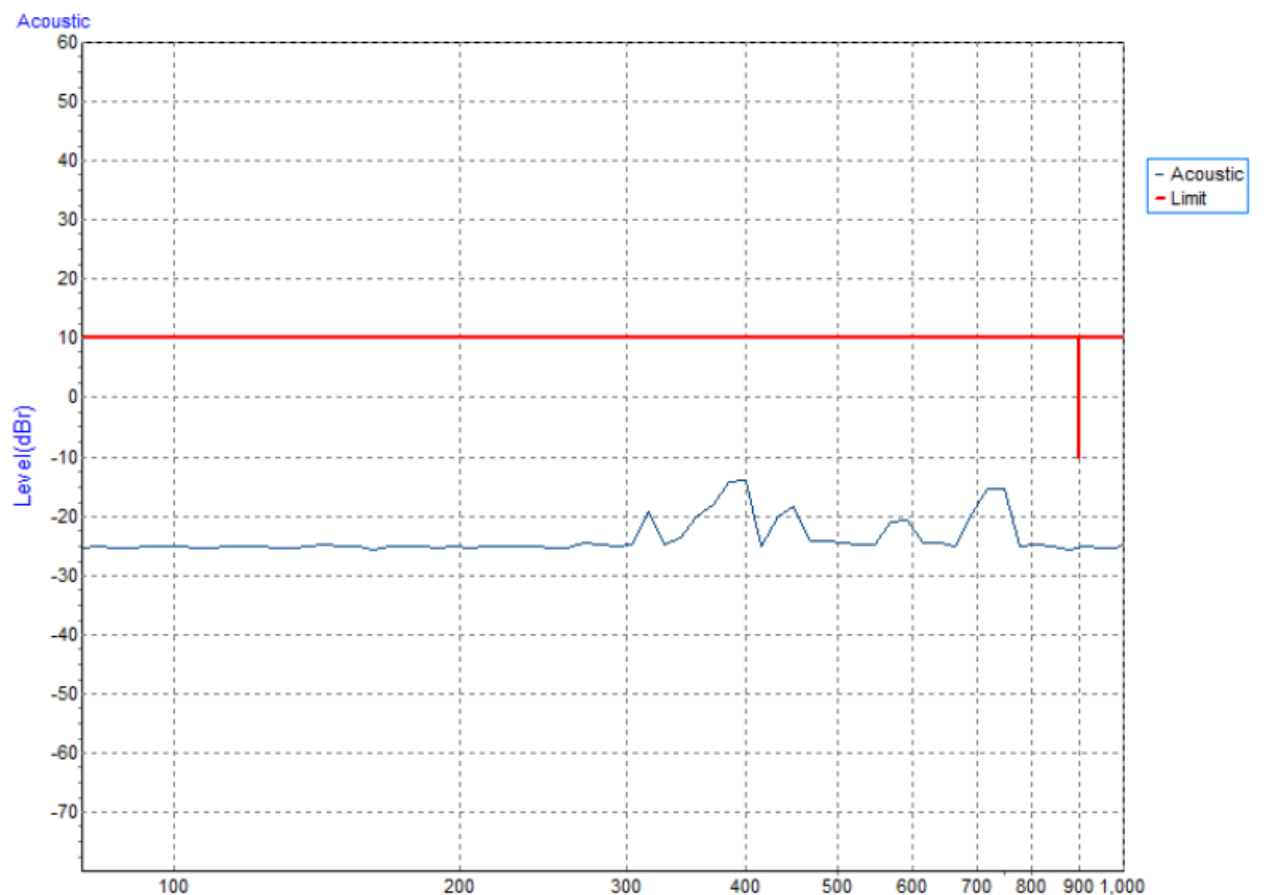


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Front Horizontal		
Note	PoE		

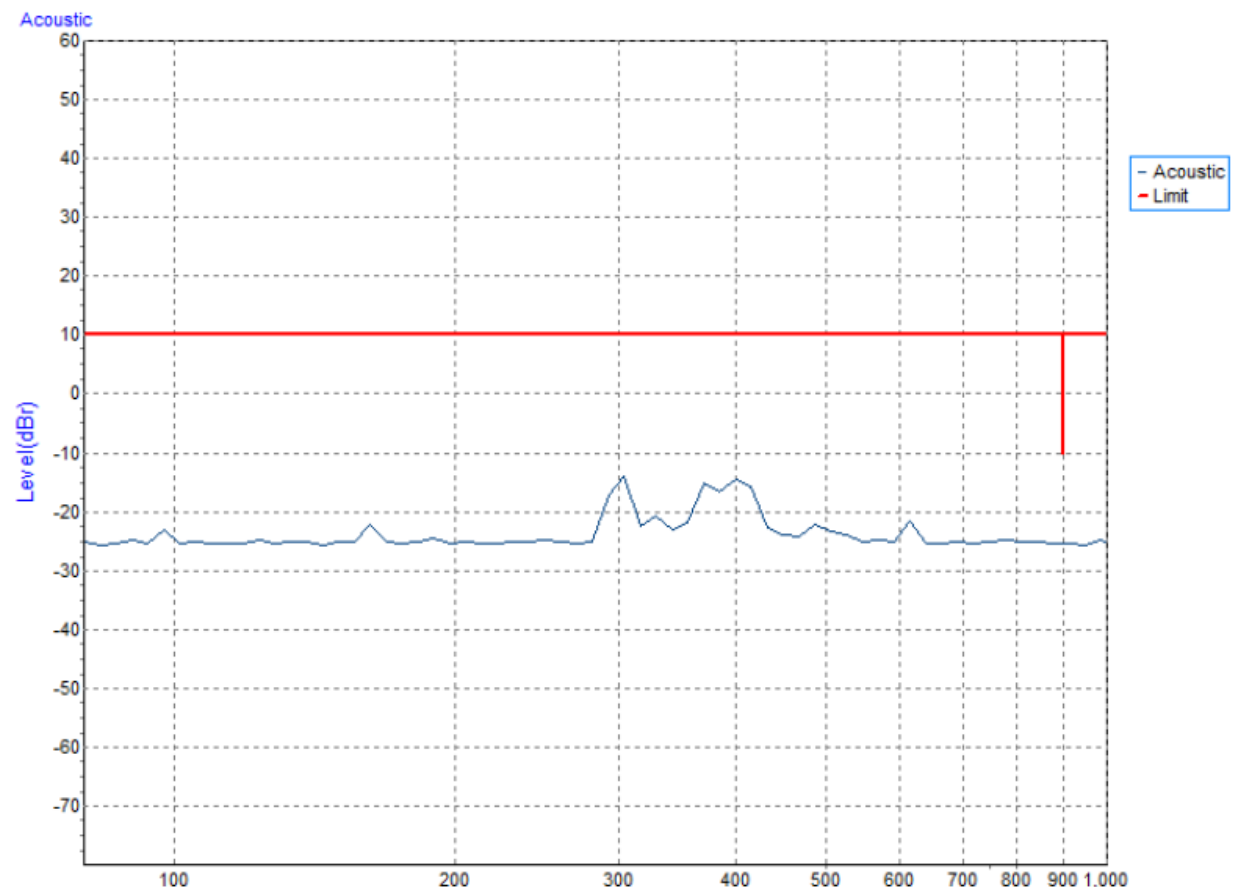


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Rear Vertical		
Note	PoE		

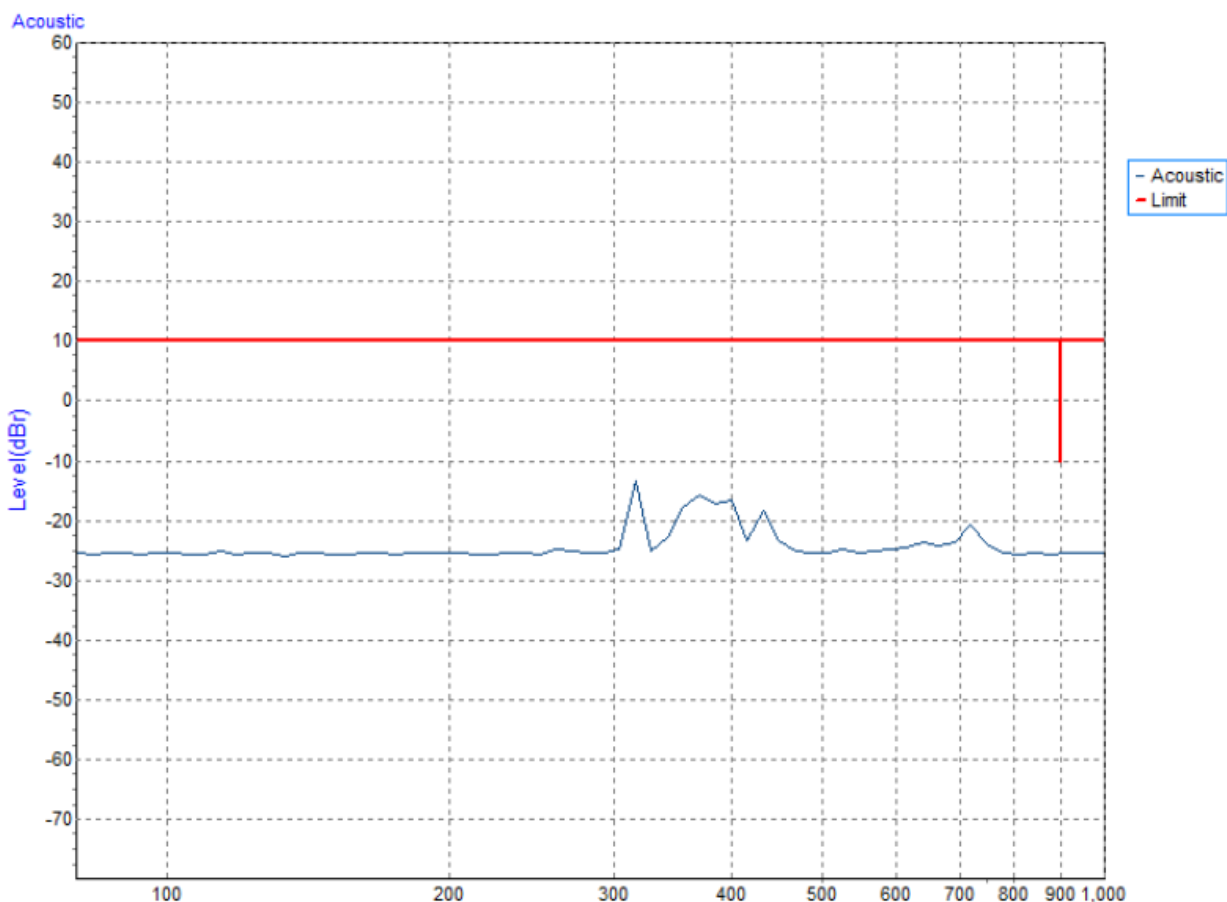


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Rear Horizontal		
Note	PoE		

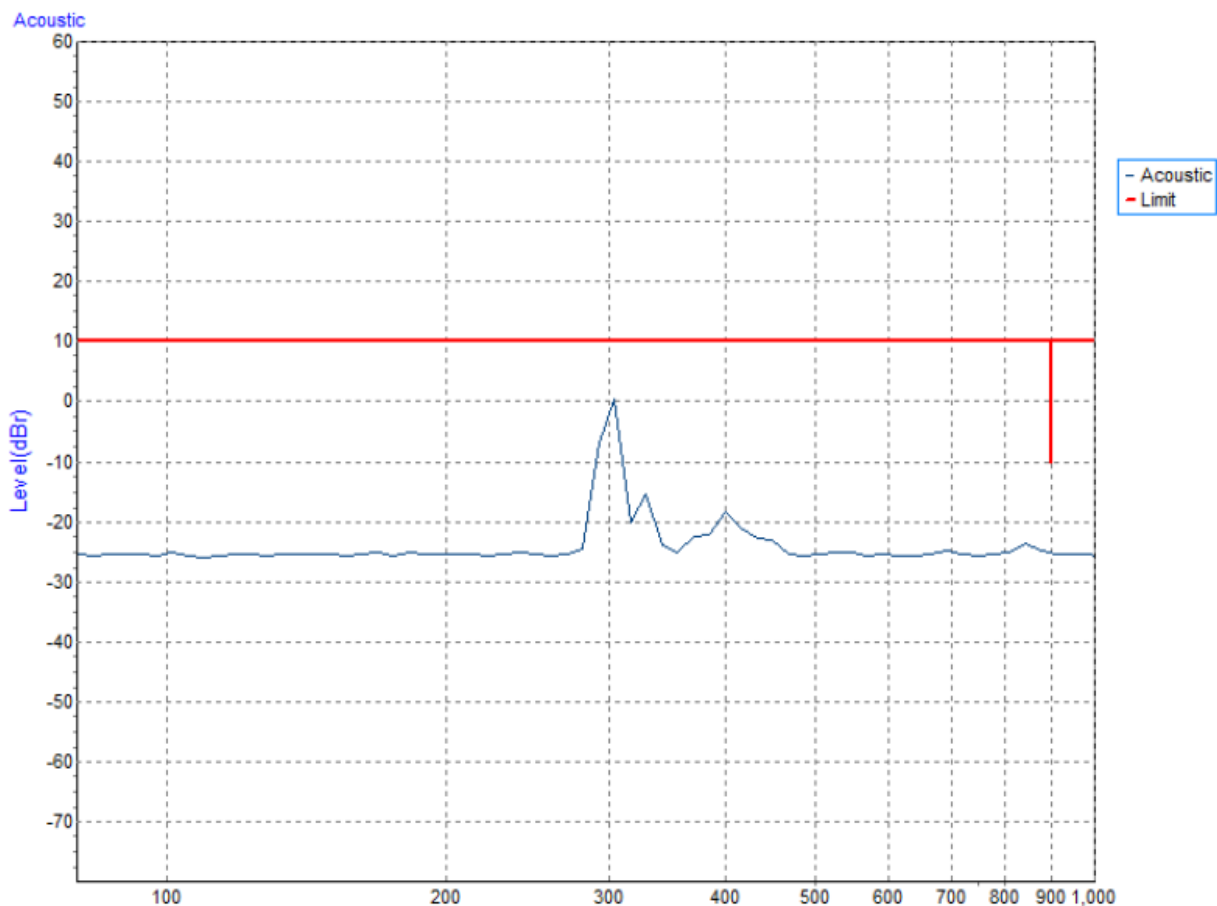


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Left Vertical		
Note	PoE		

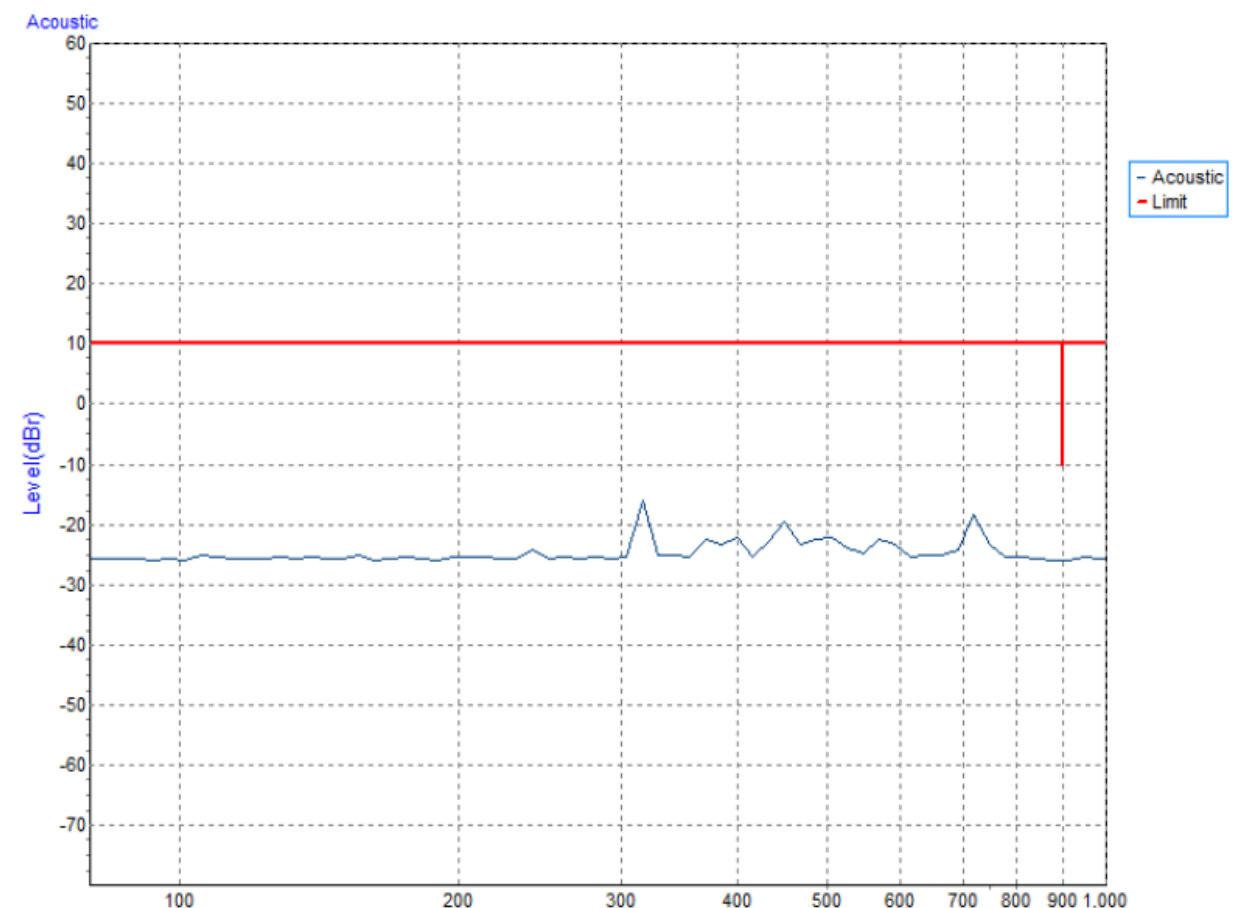


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Left Horizontal		
Note	PoE		

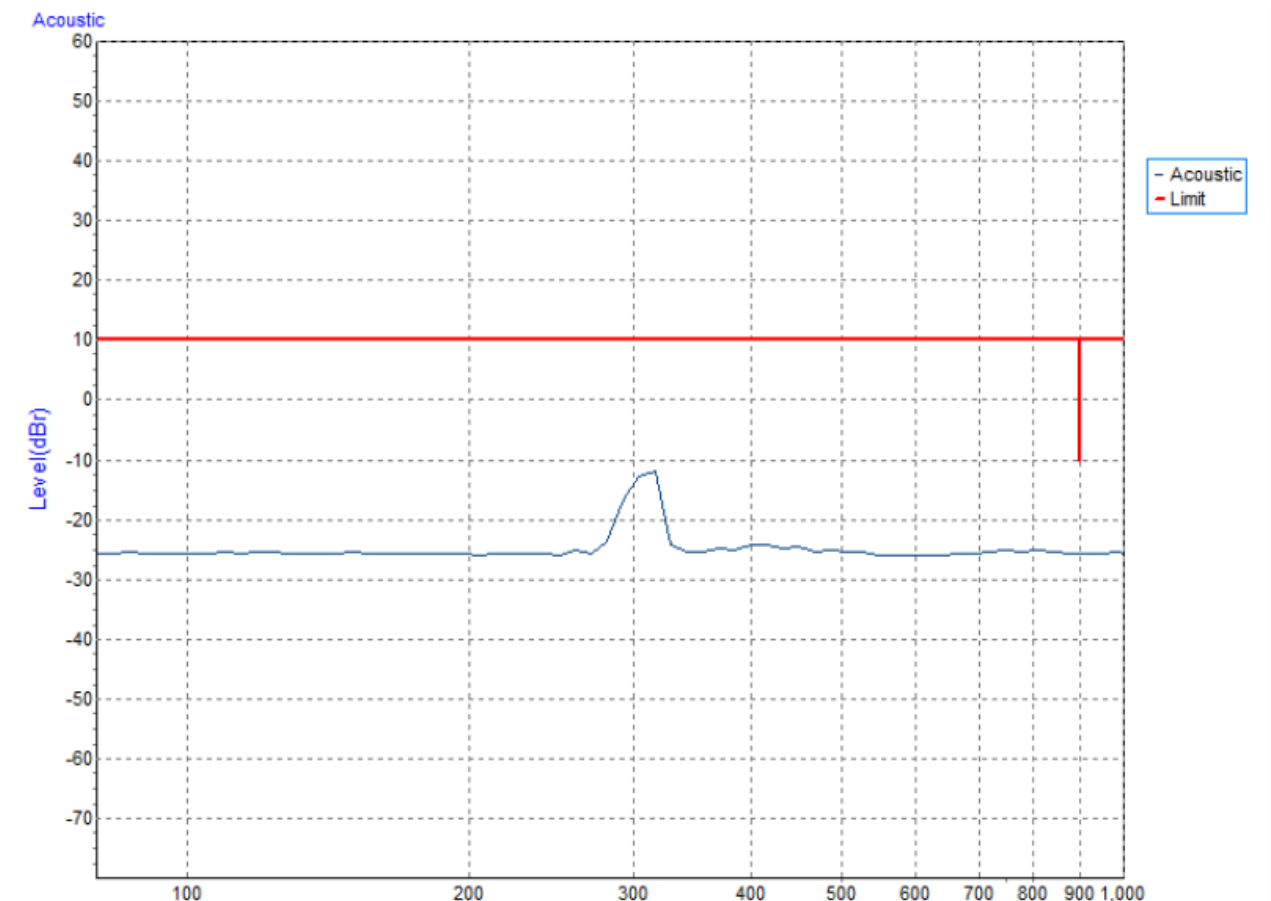


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Right Vertical		
Note	PoE		

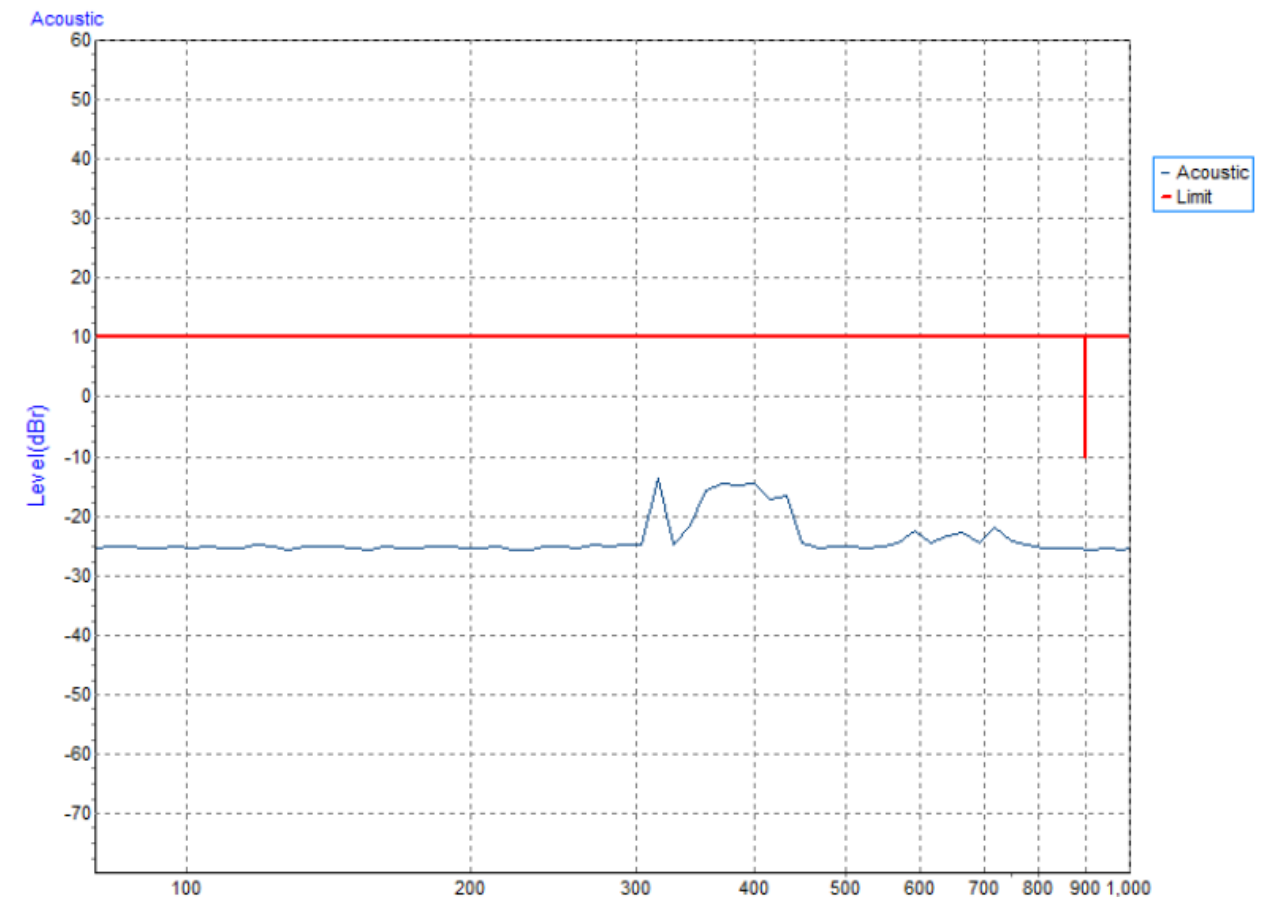


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Right Horizontal		
Note	PoE		

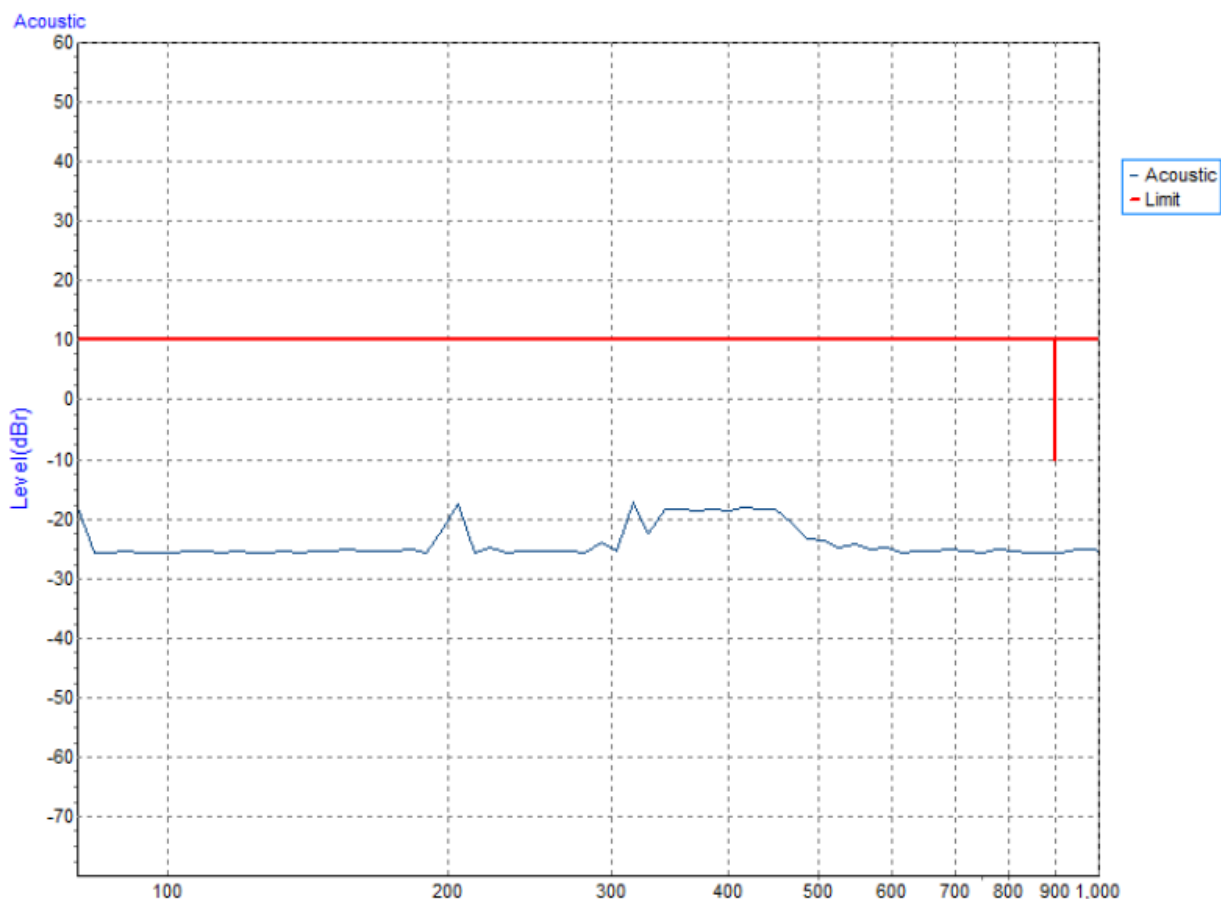


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Front Vertical		
Note	Adapter		

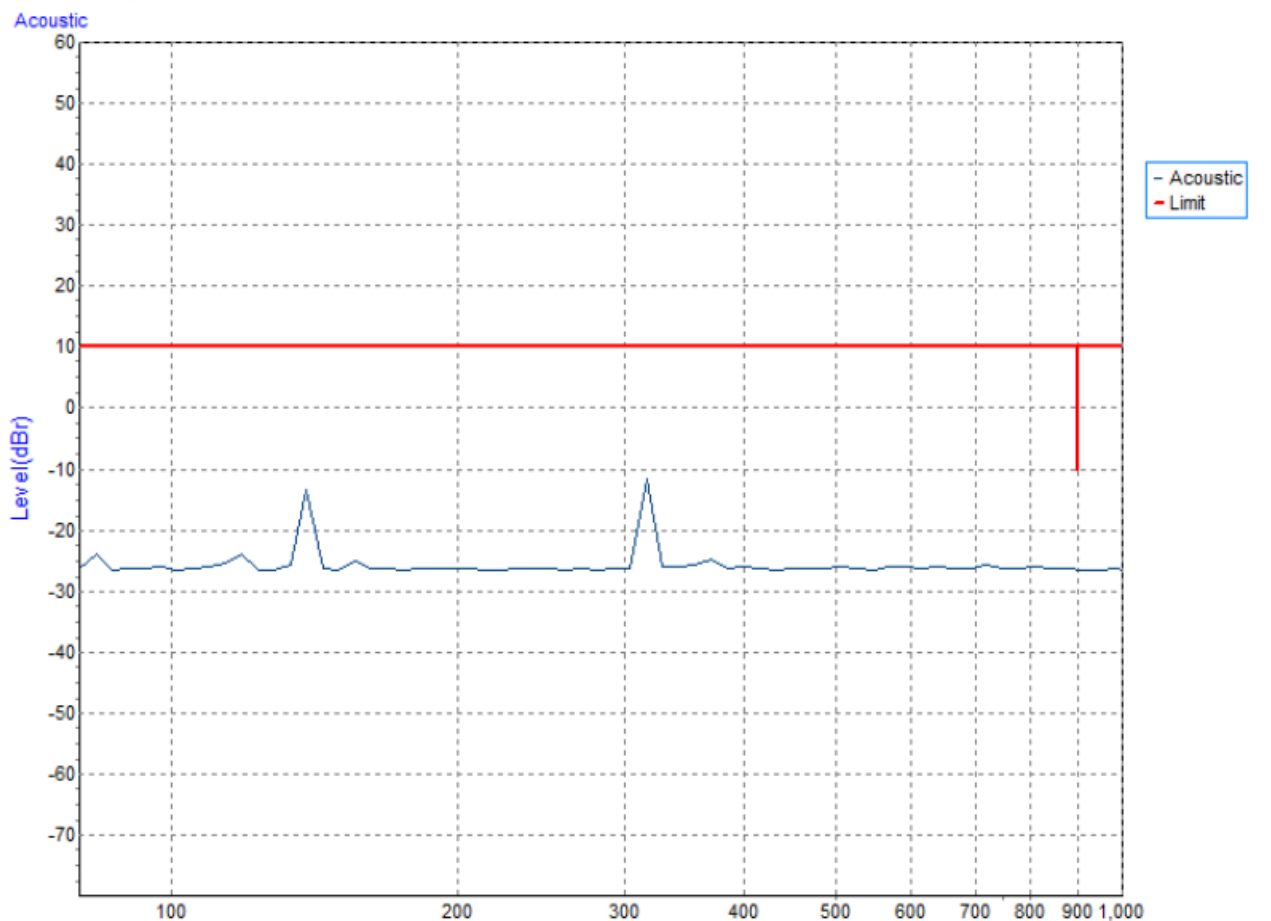


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Front Horizontal		
Note	Adapter		

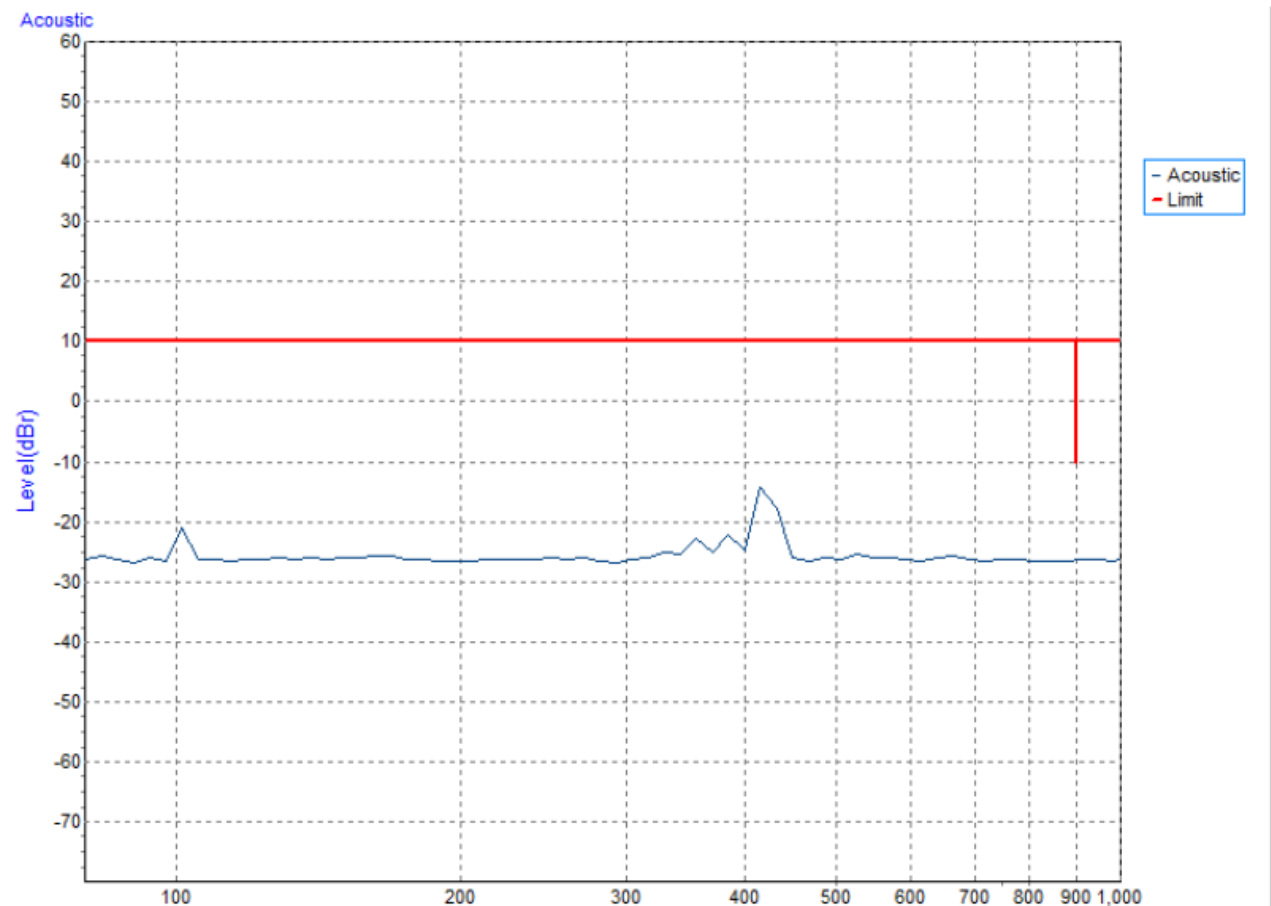


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Rear Vertical		
Note	Adapter		

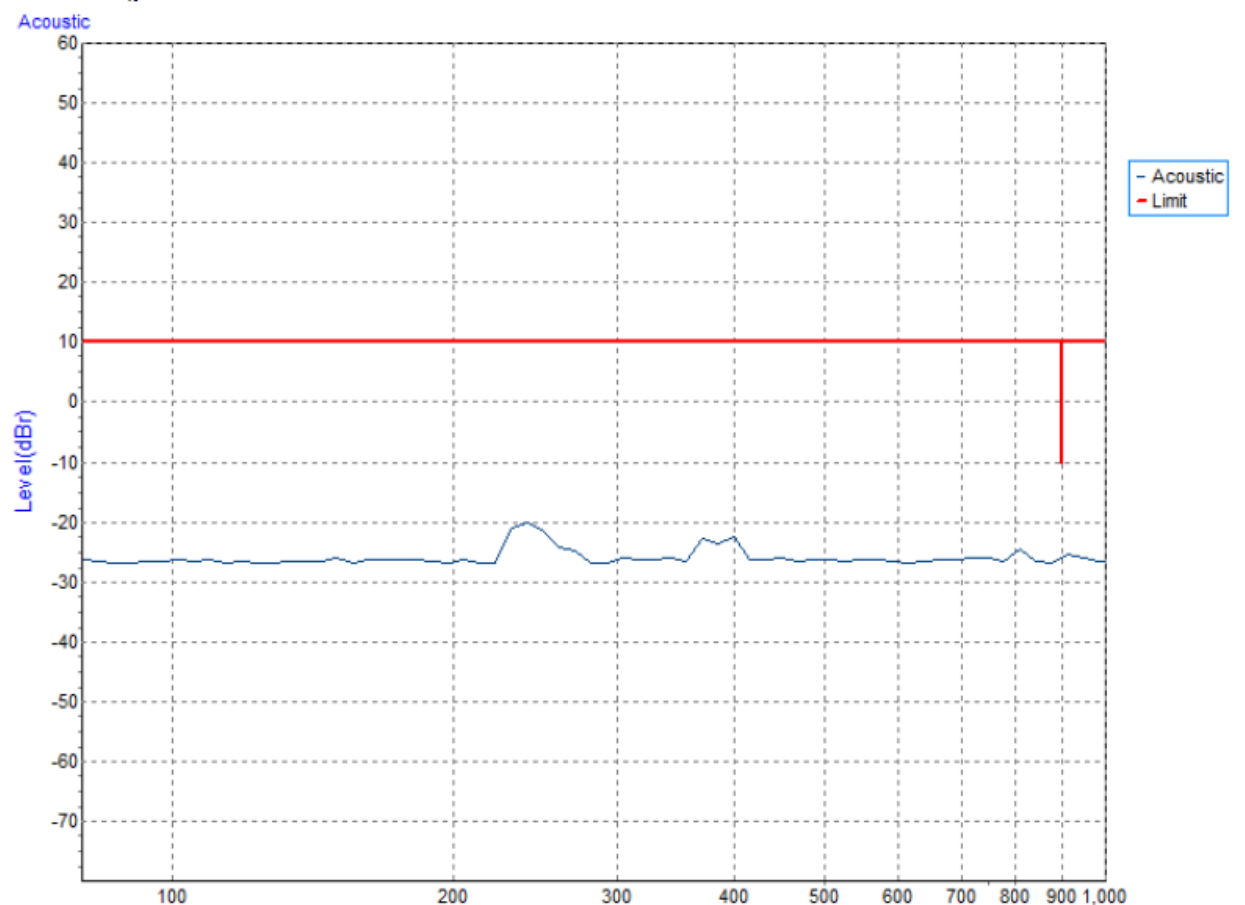


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Rear Horizontal		
Note	Adapter		

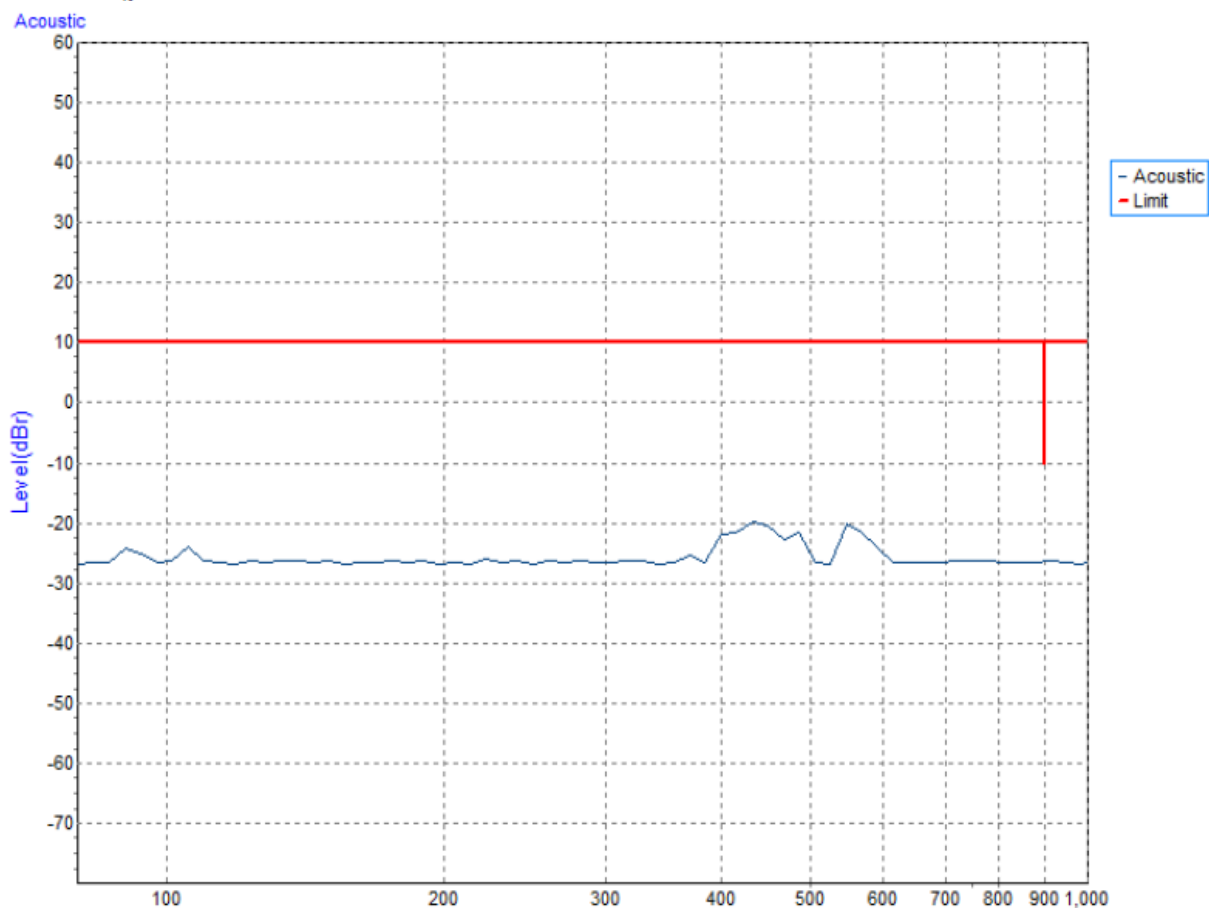


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Left Vertical		
Note	Adapter		

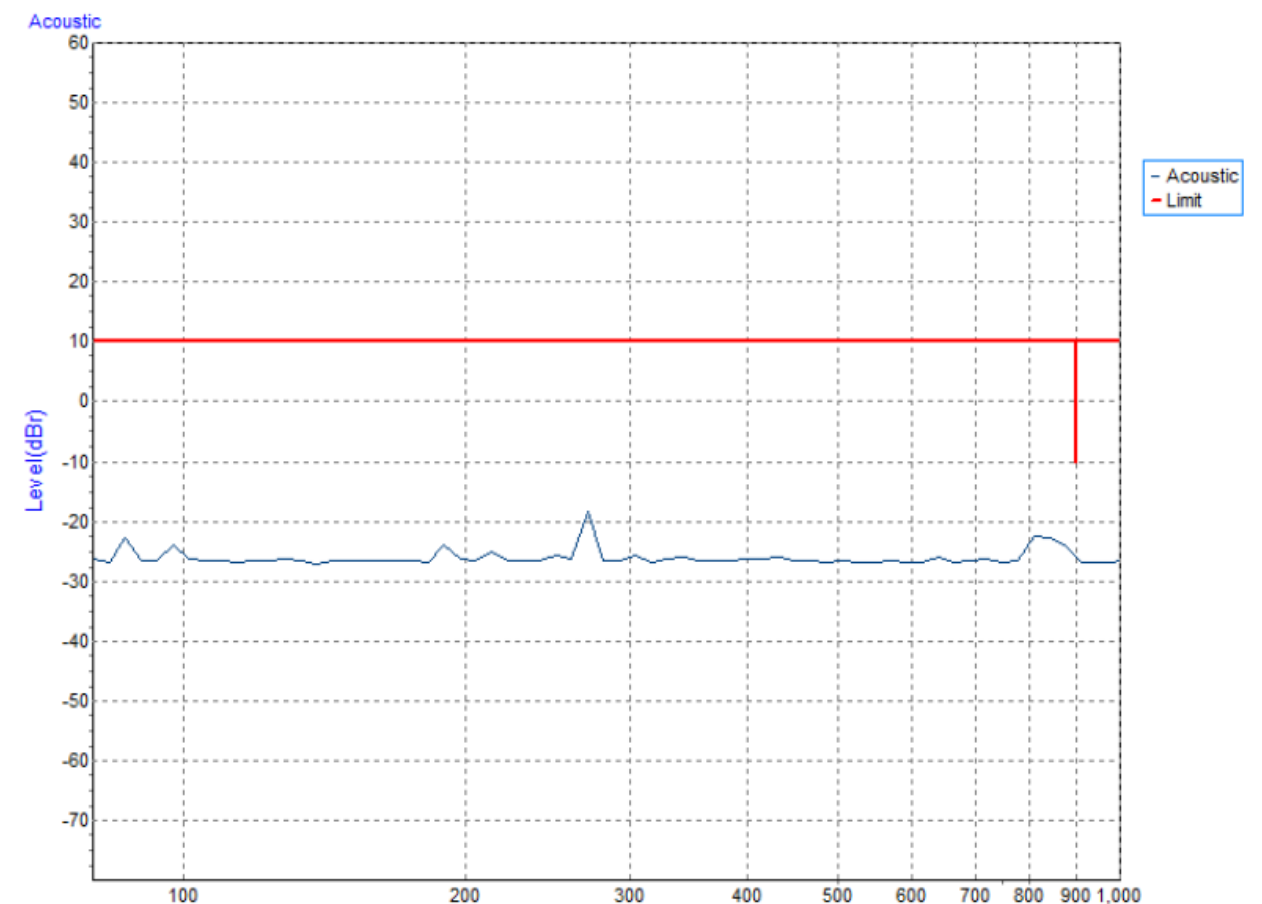


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Left Horizontal		
Note	Adapter		

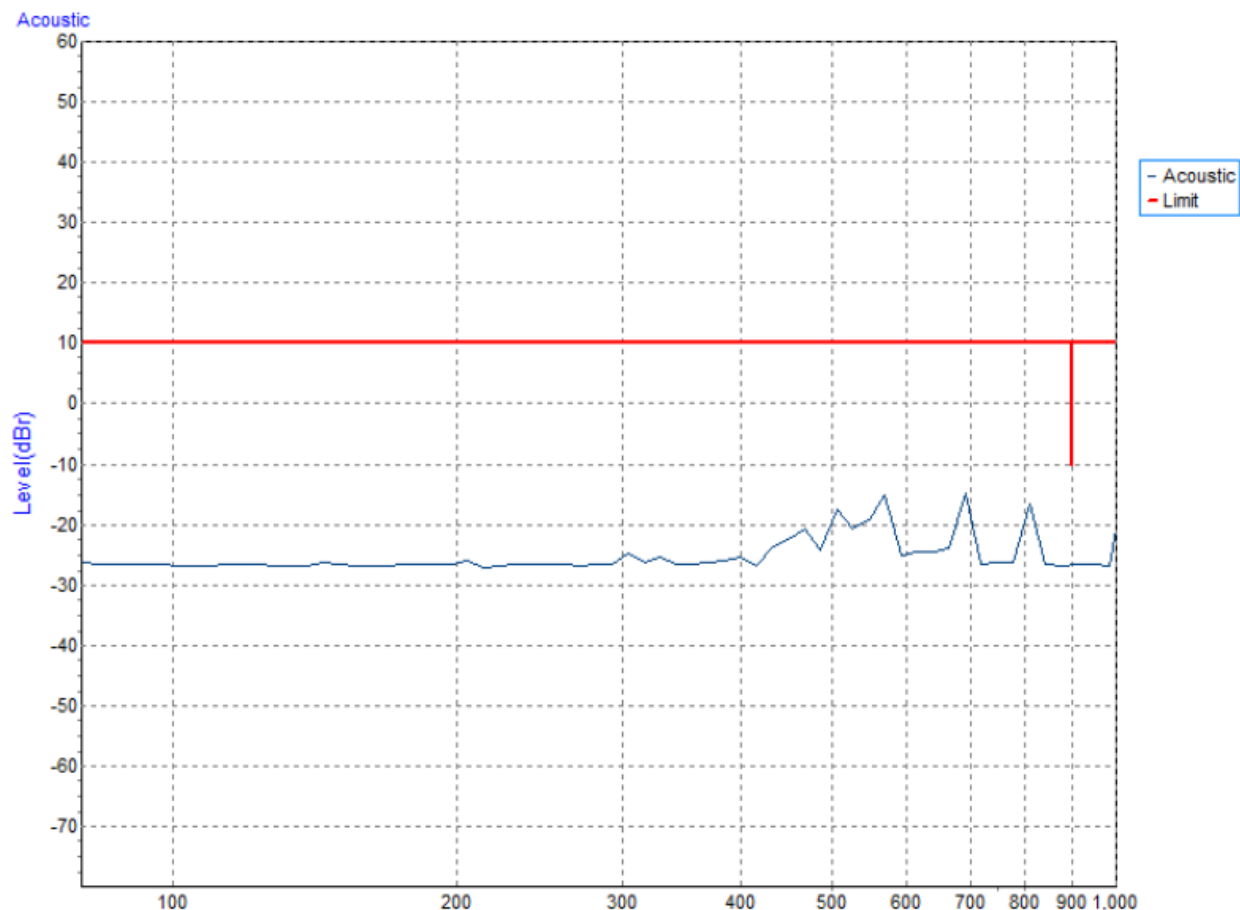


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Right Vertical		
Note	Adapter		

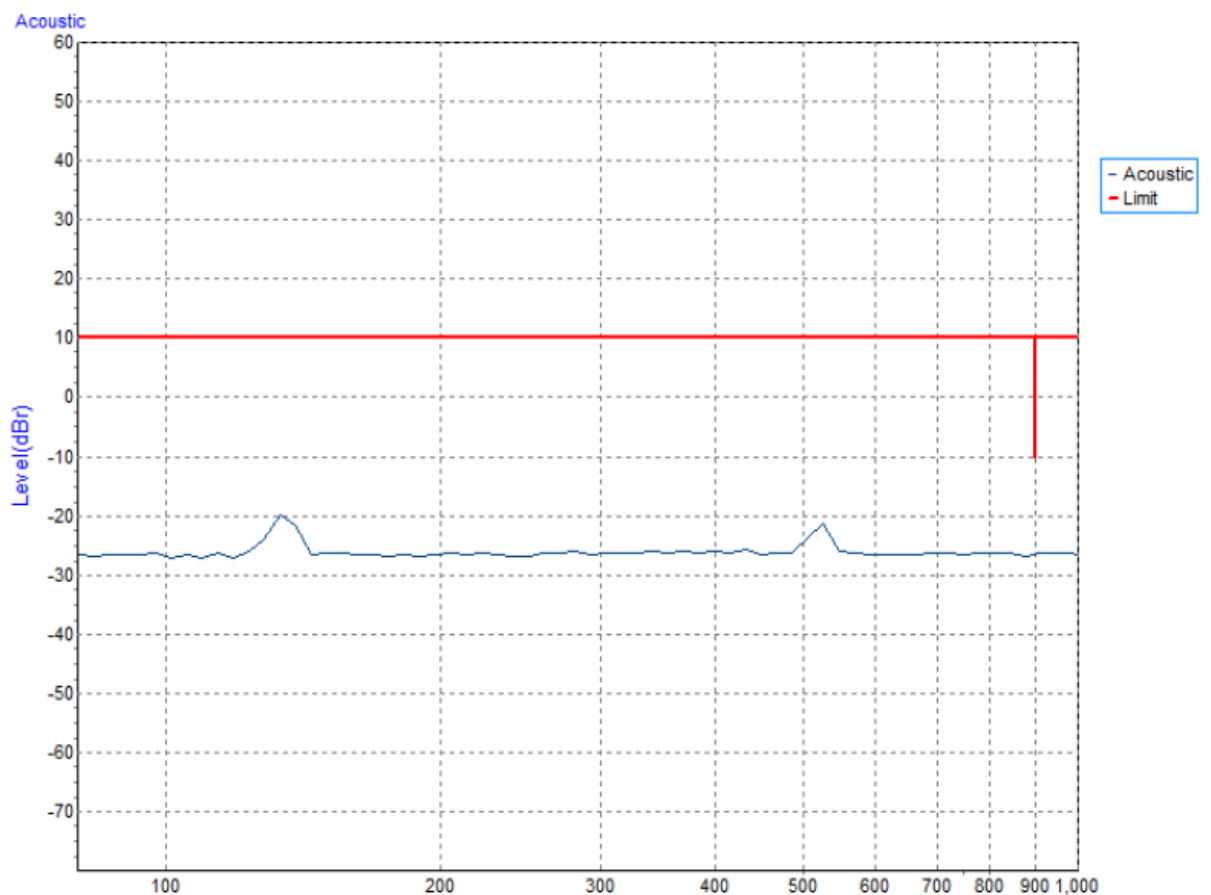


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out Right Horizontal		
Note	Adapter		

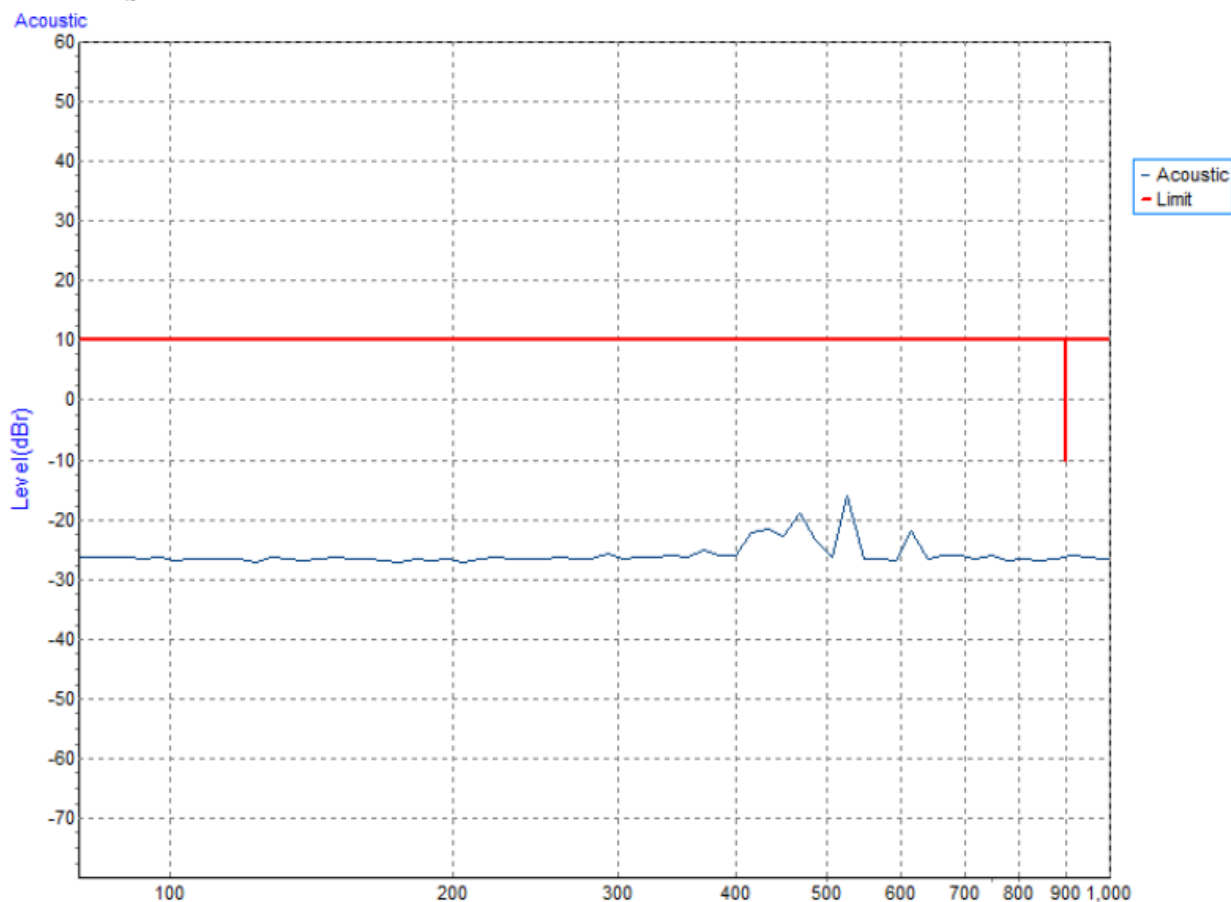


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Front Vertical		
Note	PoE		

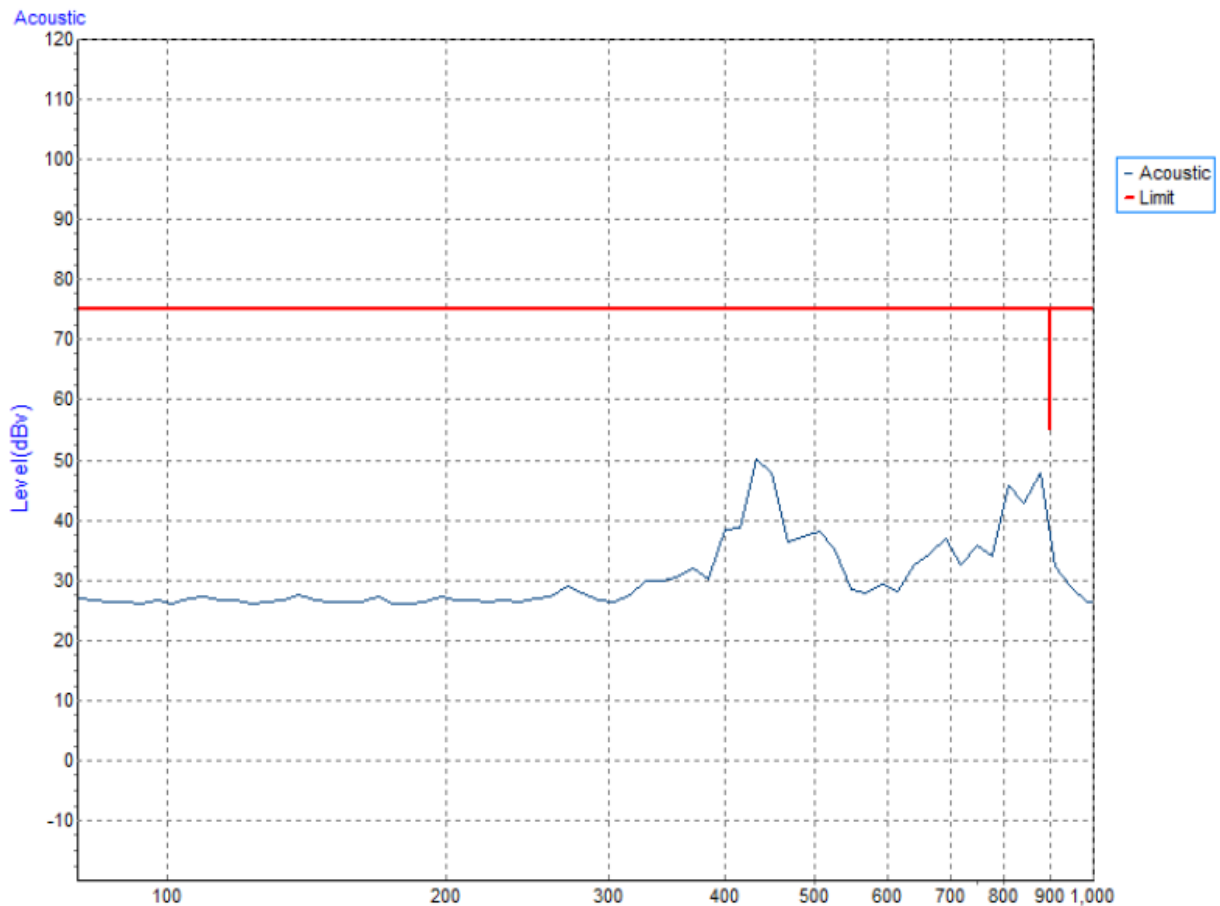


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Front Horizontal		
Note	PoE		

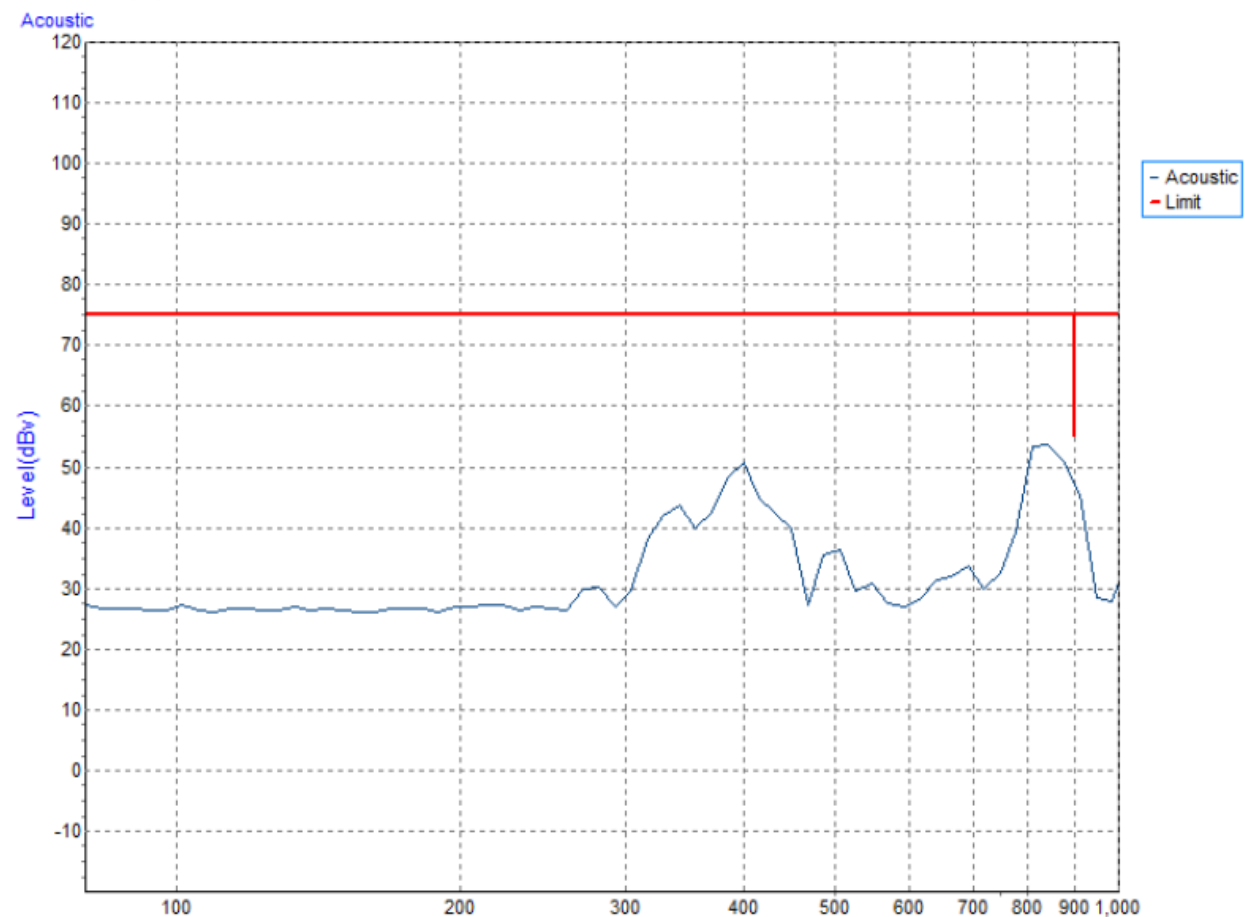


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Rear Vertical		
Note	PoE		

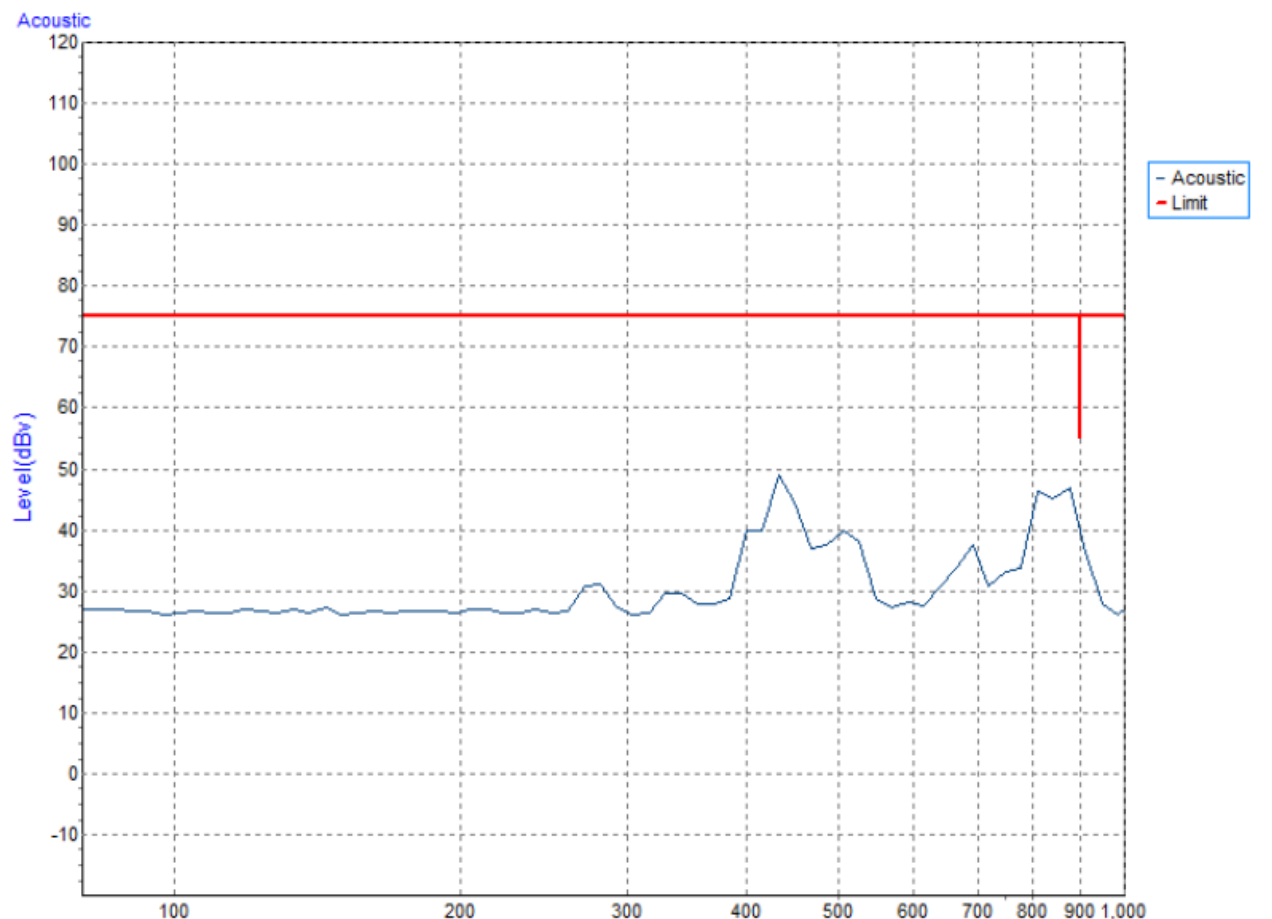


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Rear Horizontal		
Note	PoE		

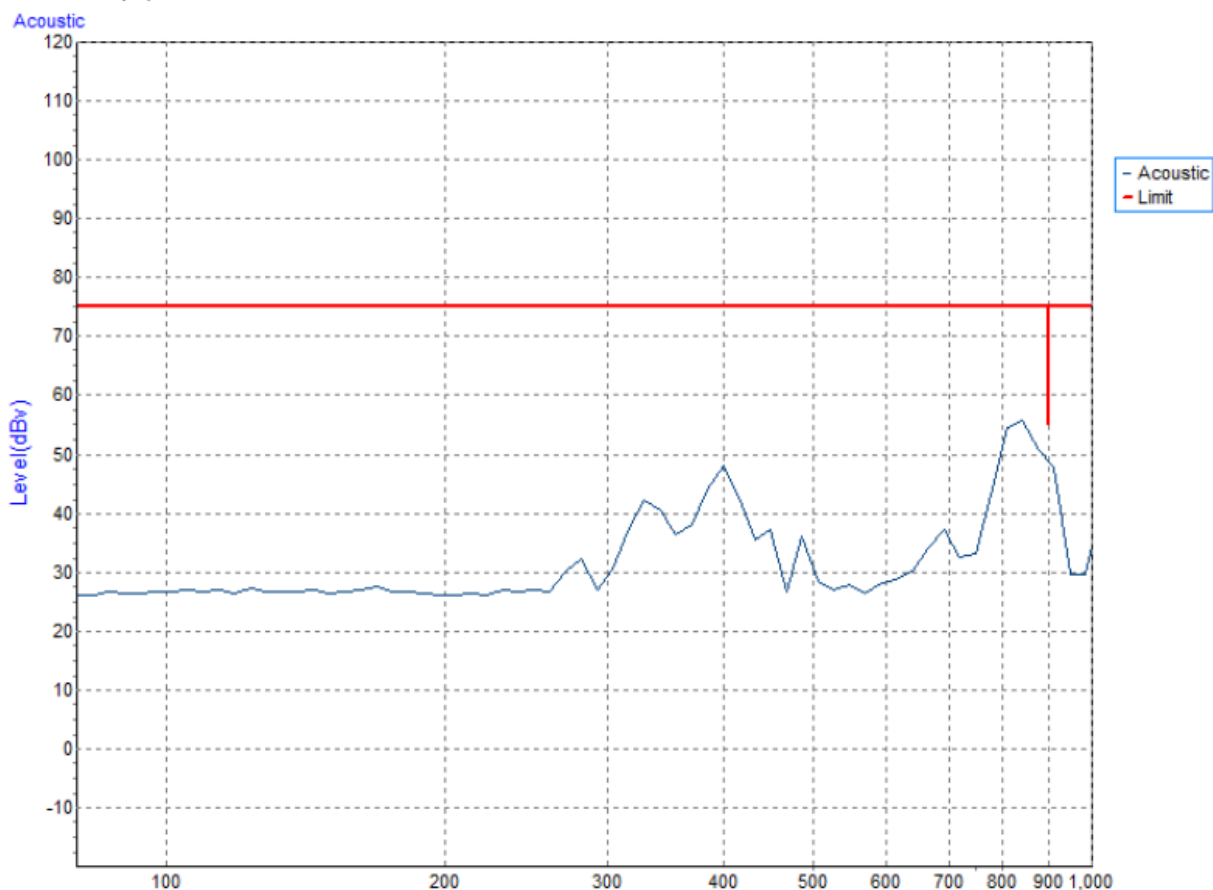


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Left Vertical		
Note	PoE		

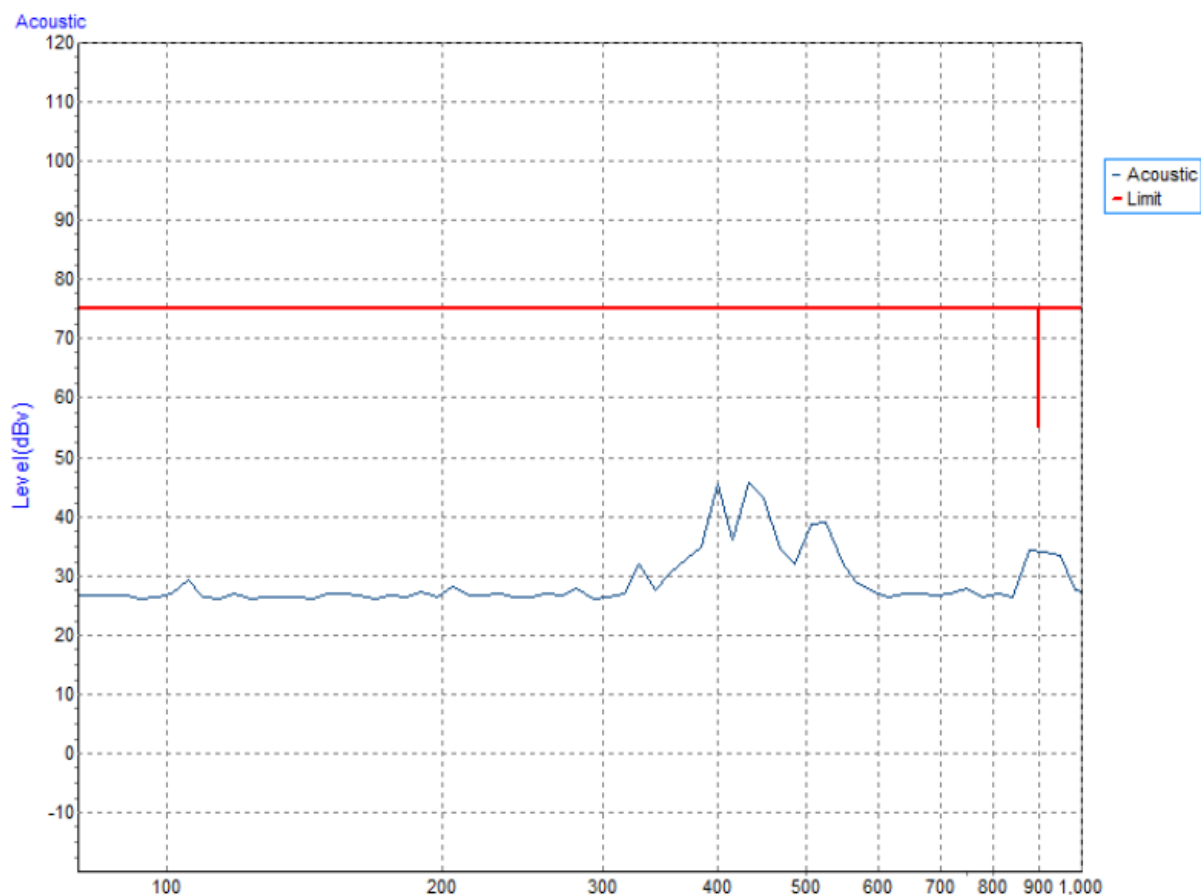


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Left Horizontal		
Note	PoE		

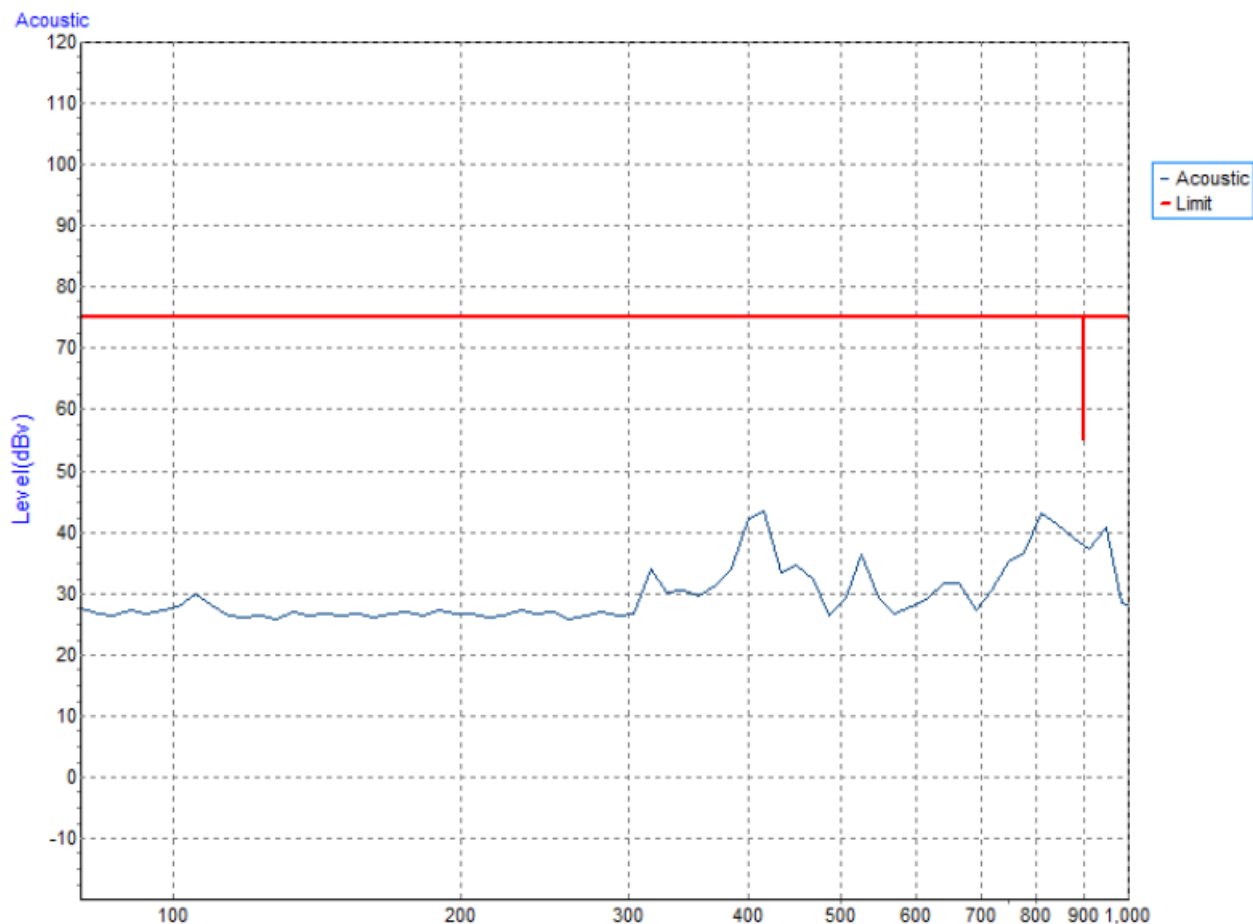


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Right Vertical		
Note	PoE		

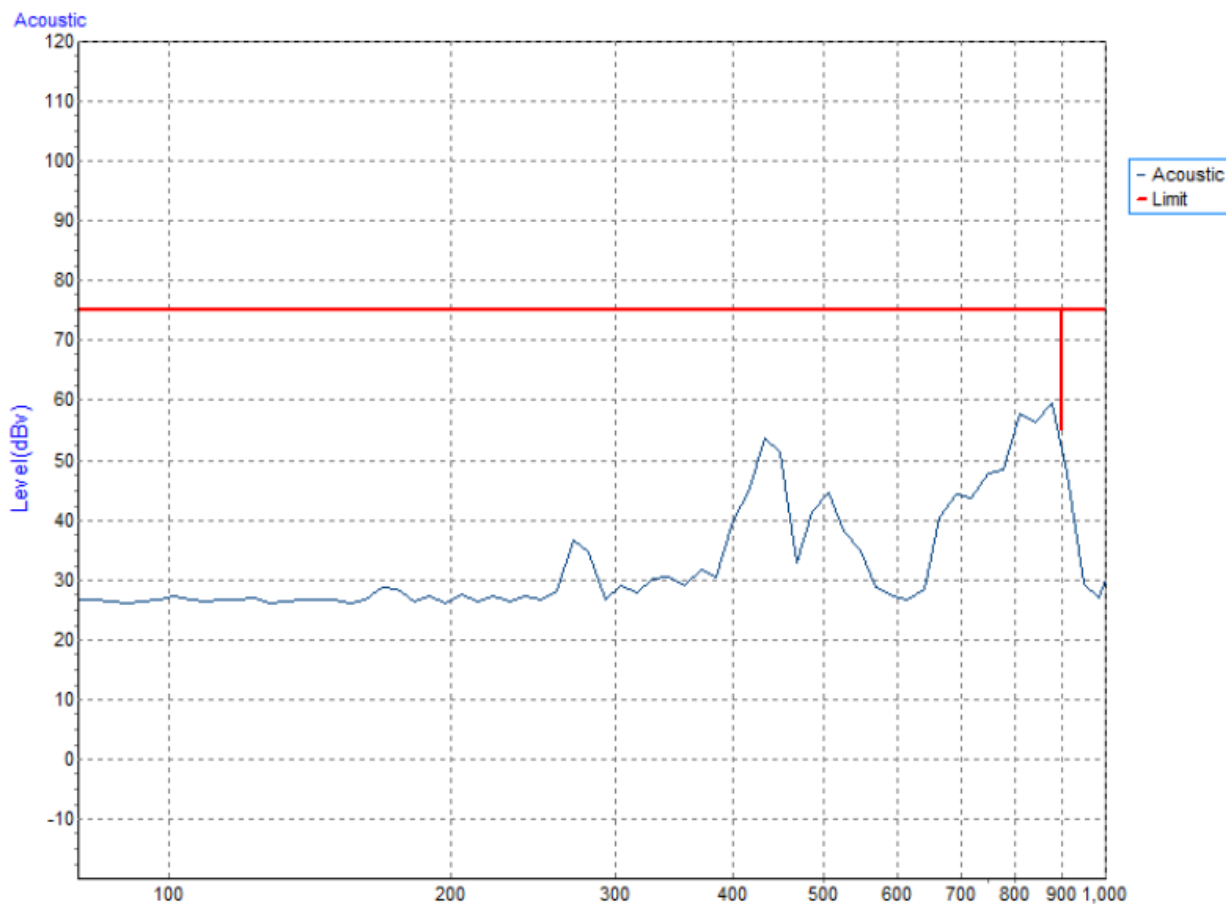


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Right Horizontal		
Note	PoE		

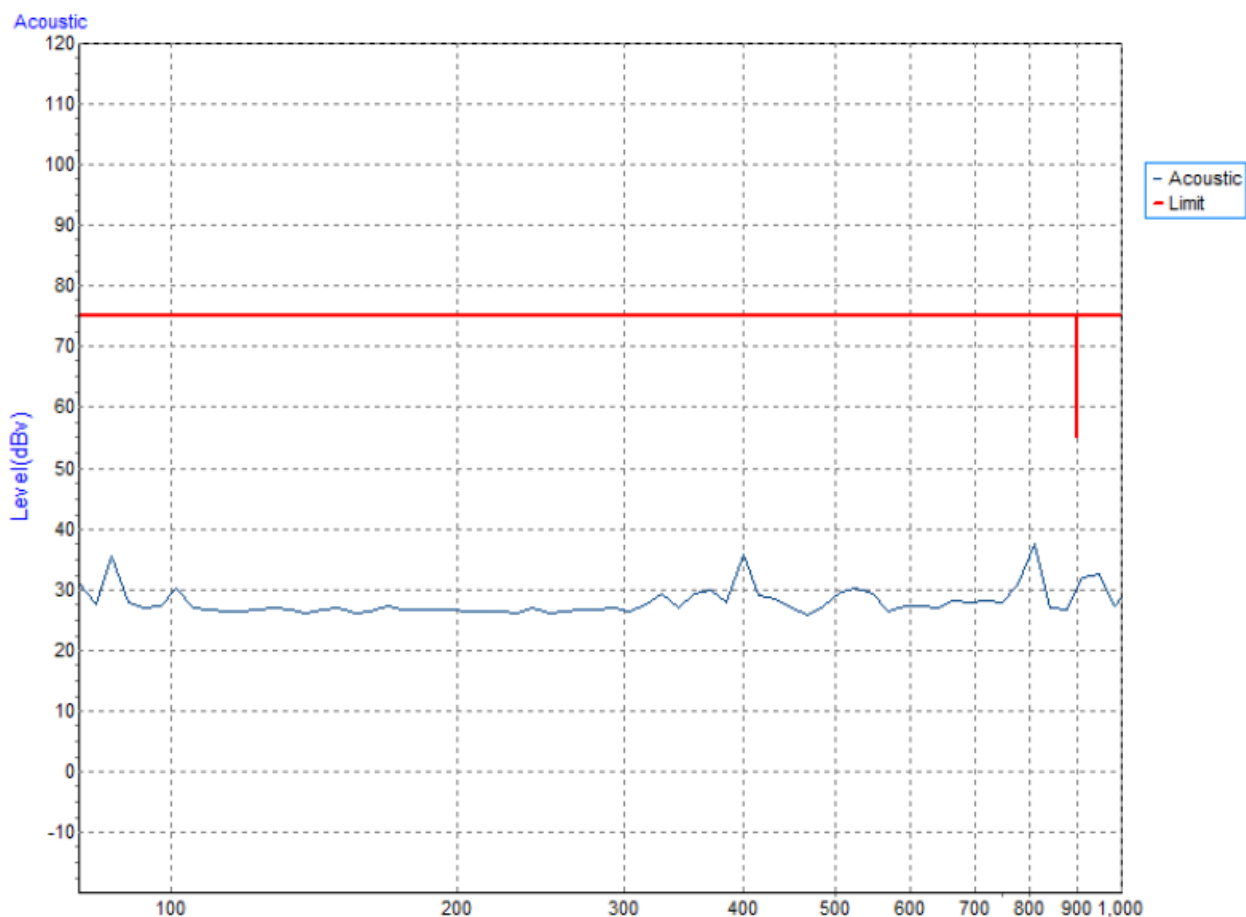


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Front Vertical		
Note	Adapter		

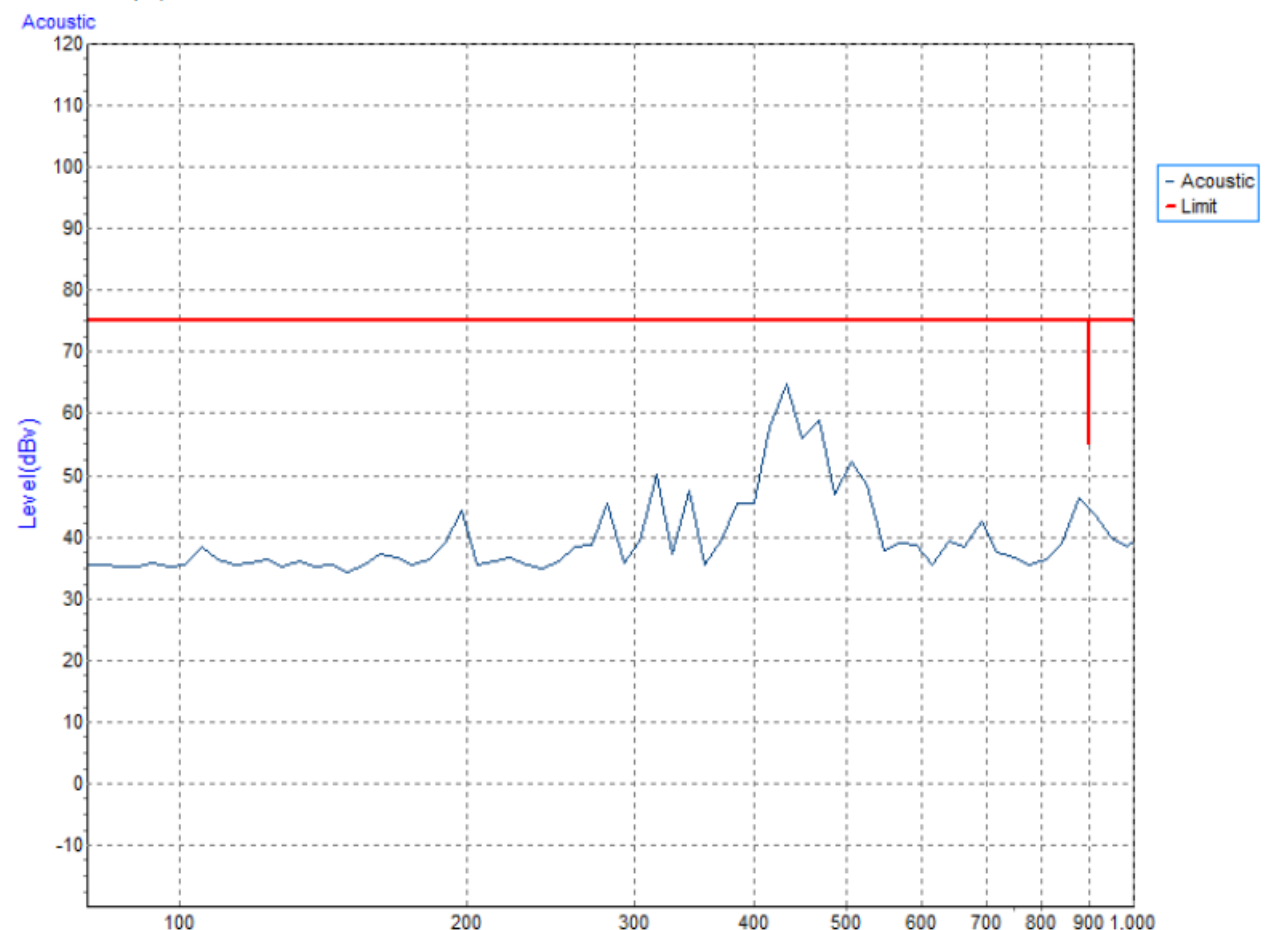


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Front Horizontal		
Note	Adapter		

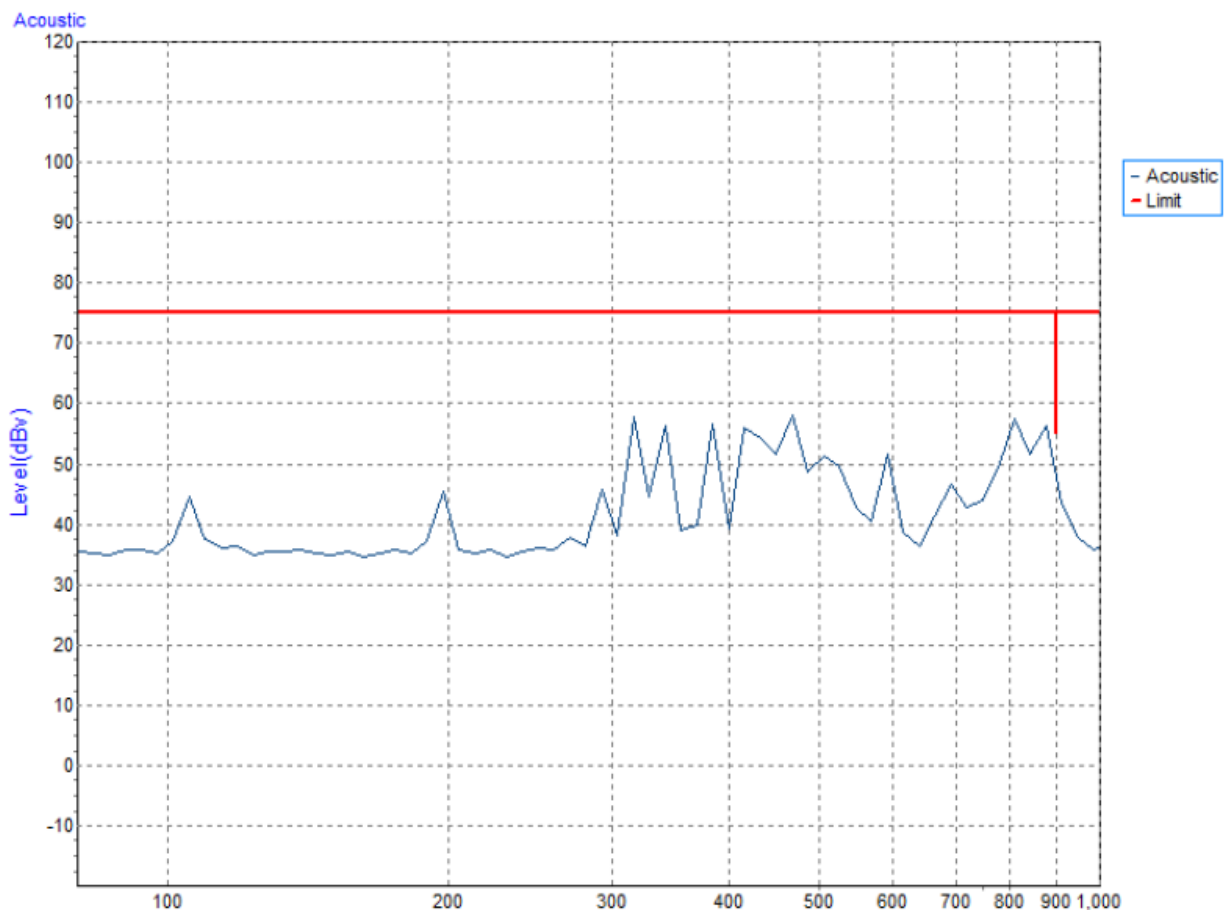


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Rear Vertical		
Note	Adapter		

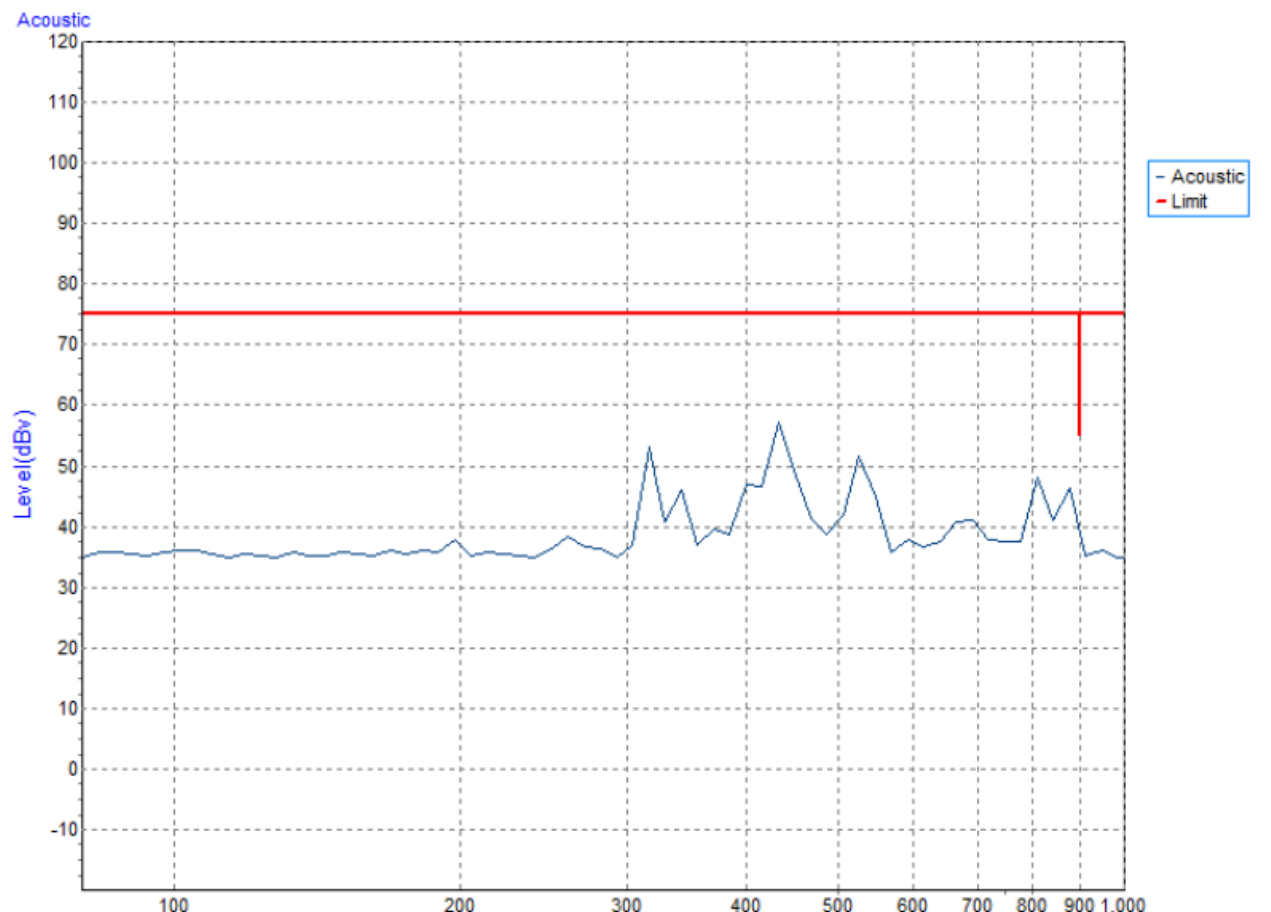


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Rear Horizontal		
Note	Adapter		

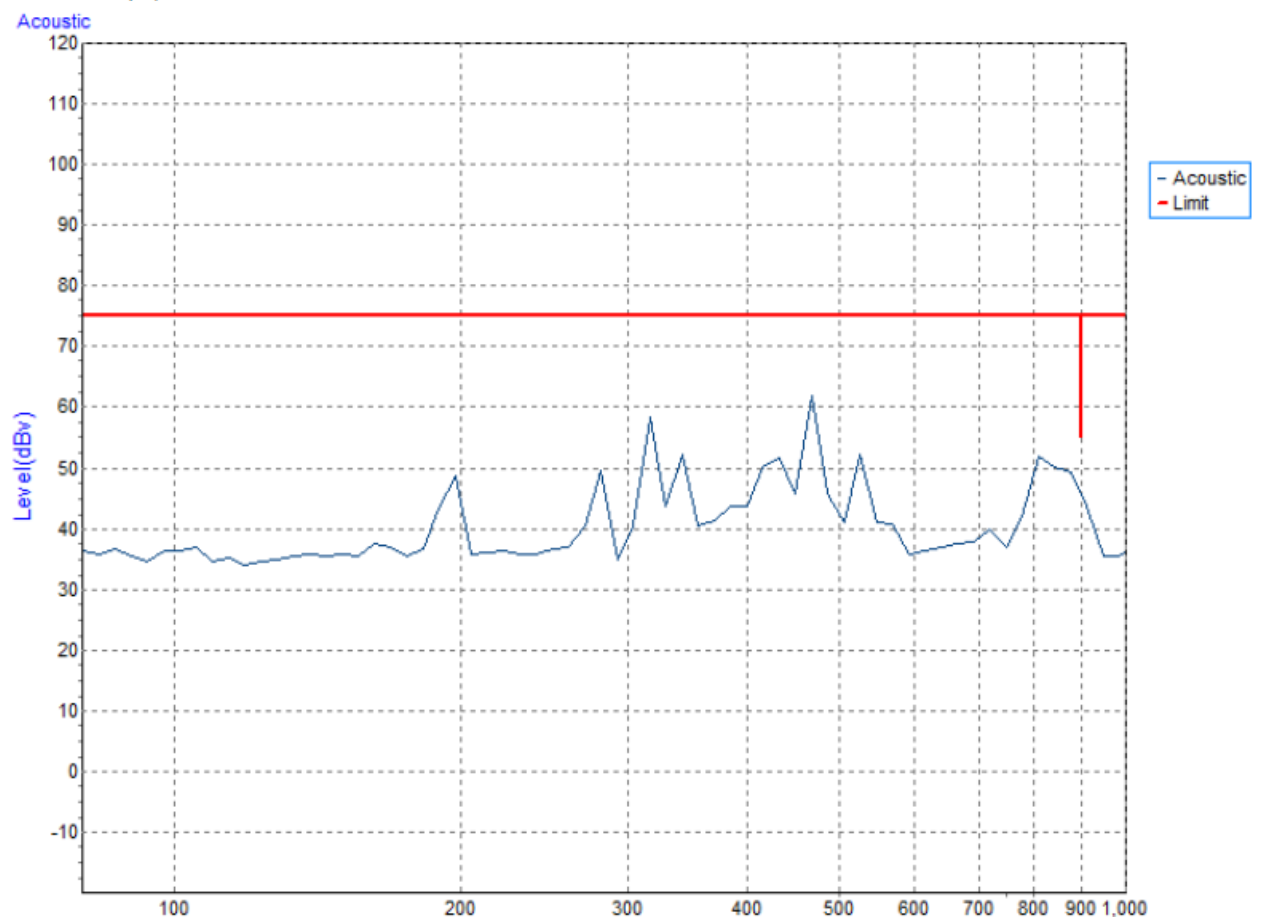


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Left Vertical		
Note	Adapter		

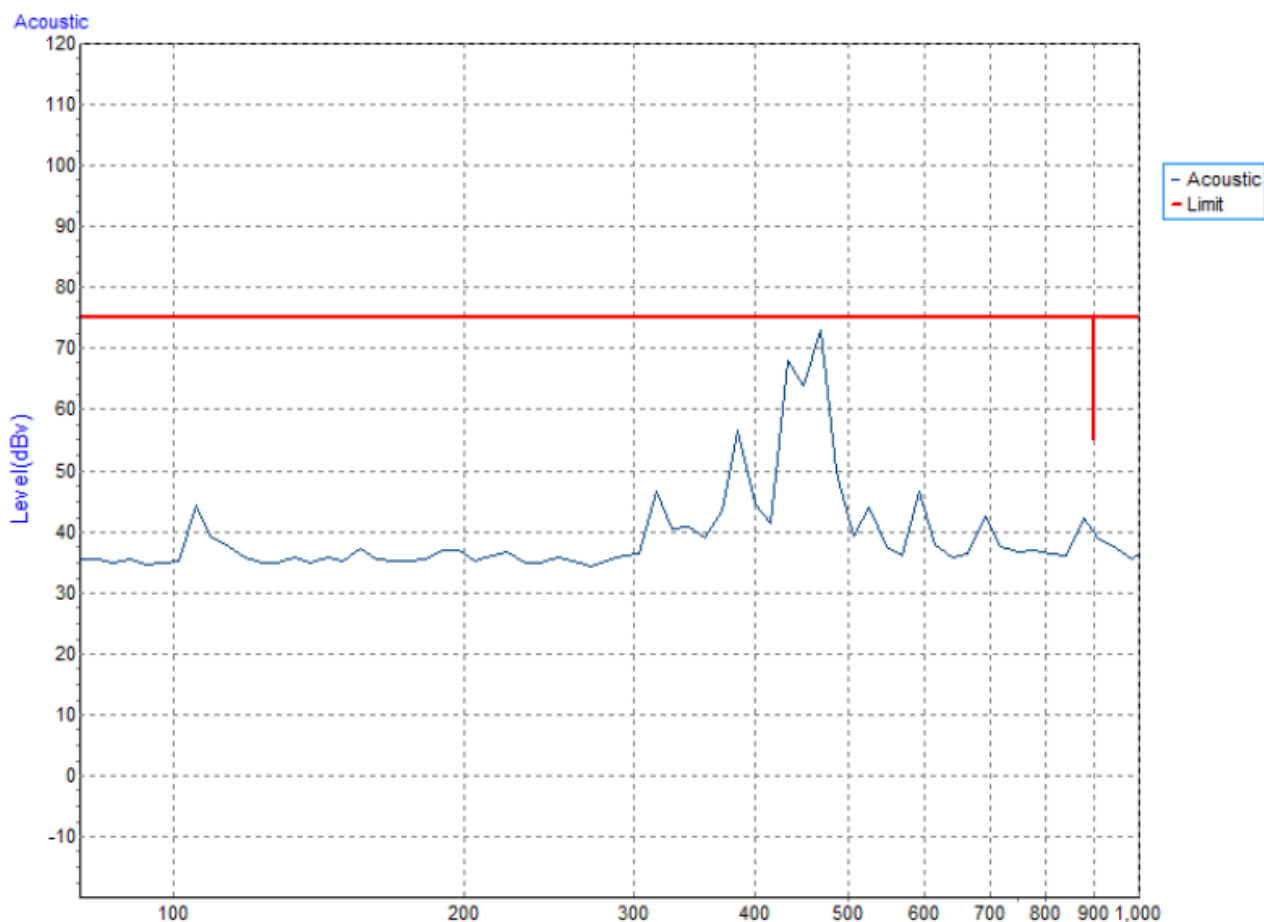


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Left Horizontal		
Note	Adapter		

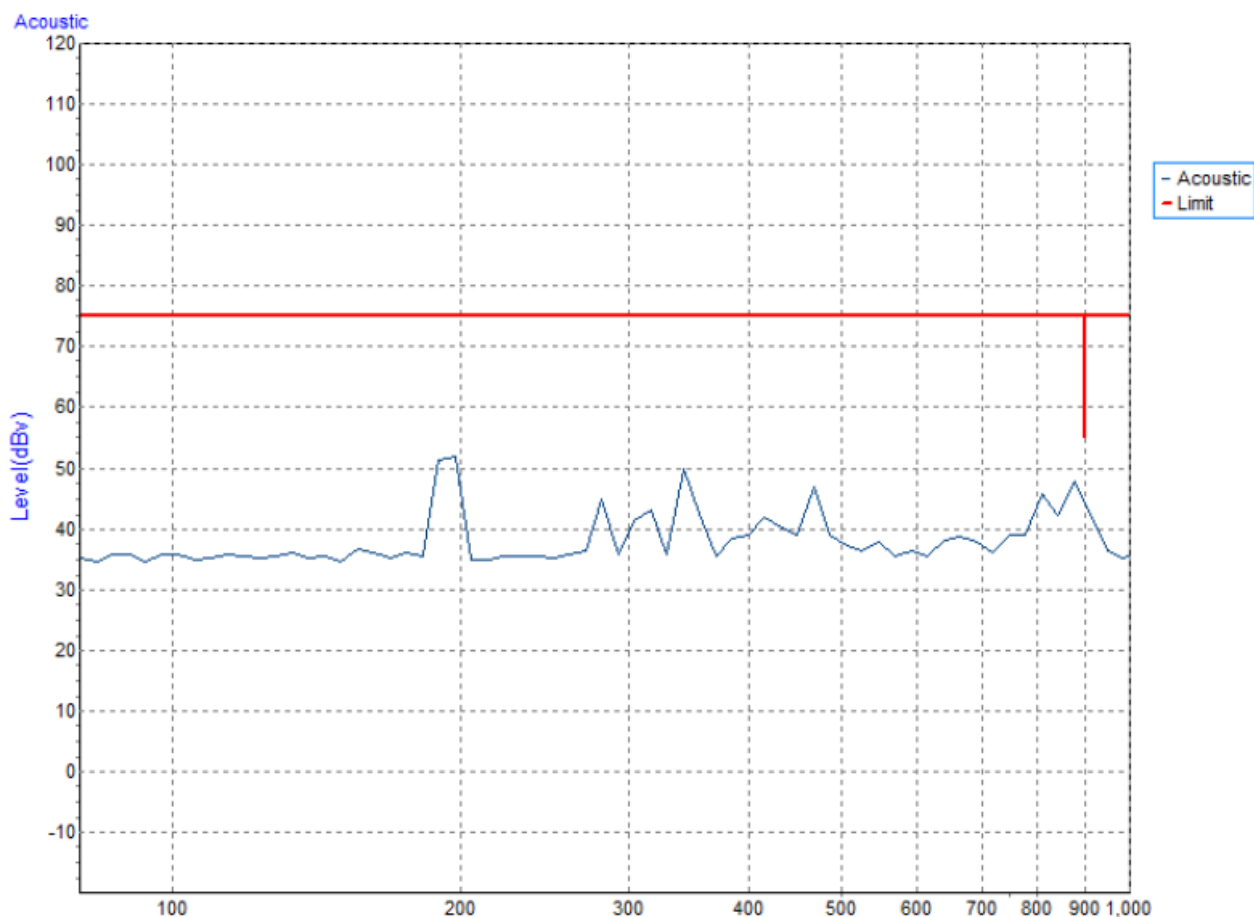

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Right Vertical		
Note	Adapter		

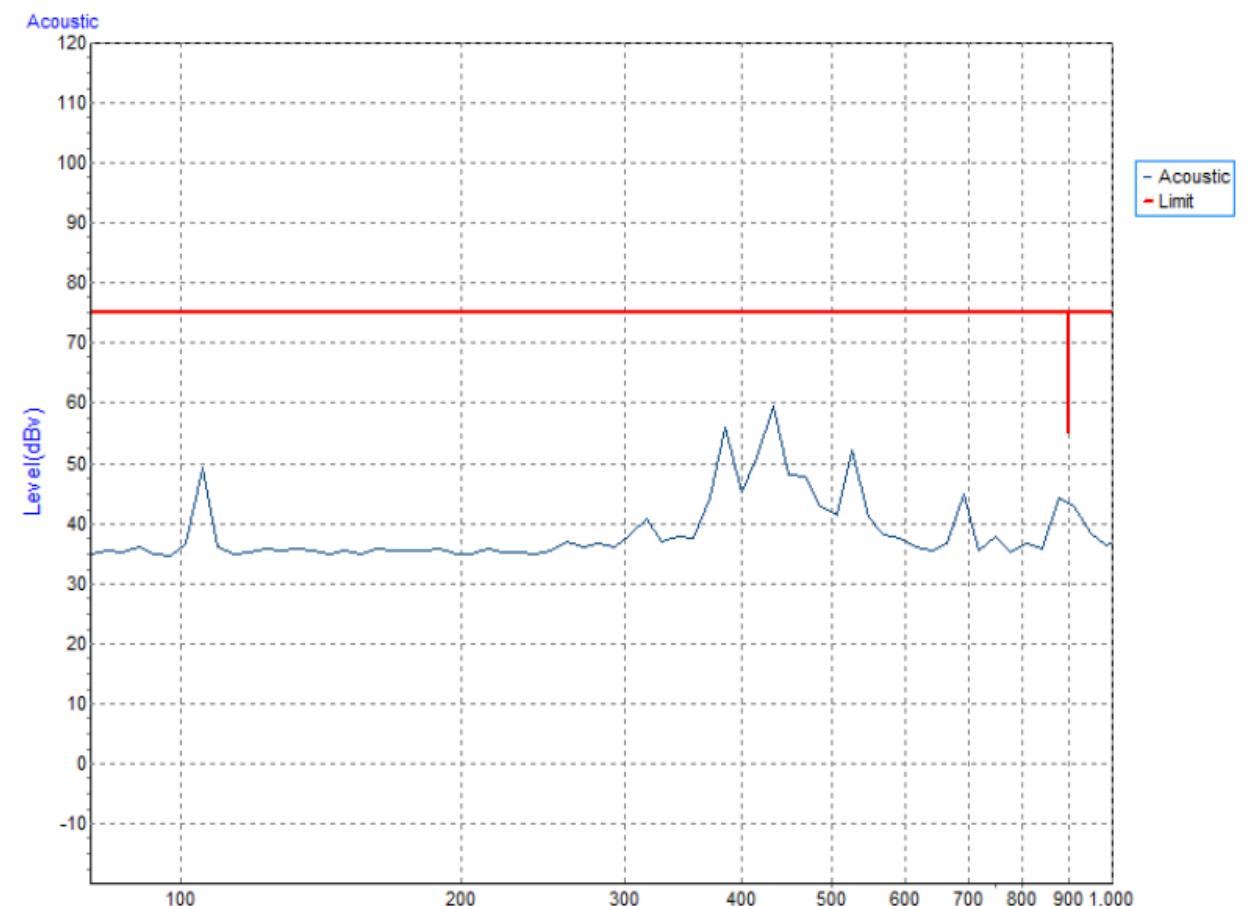

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out Right Horizontal		
Note	Adapter		

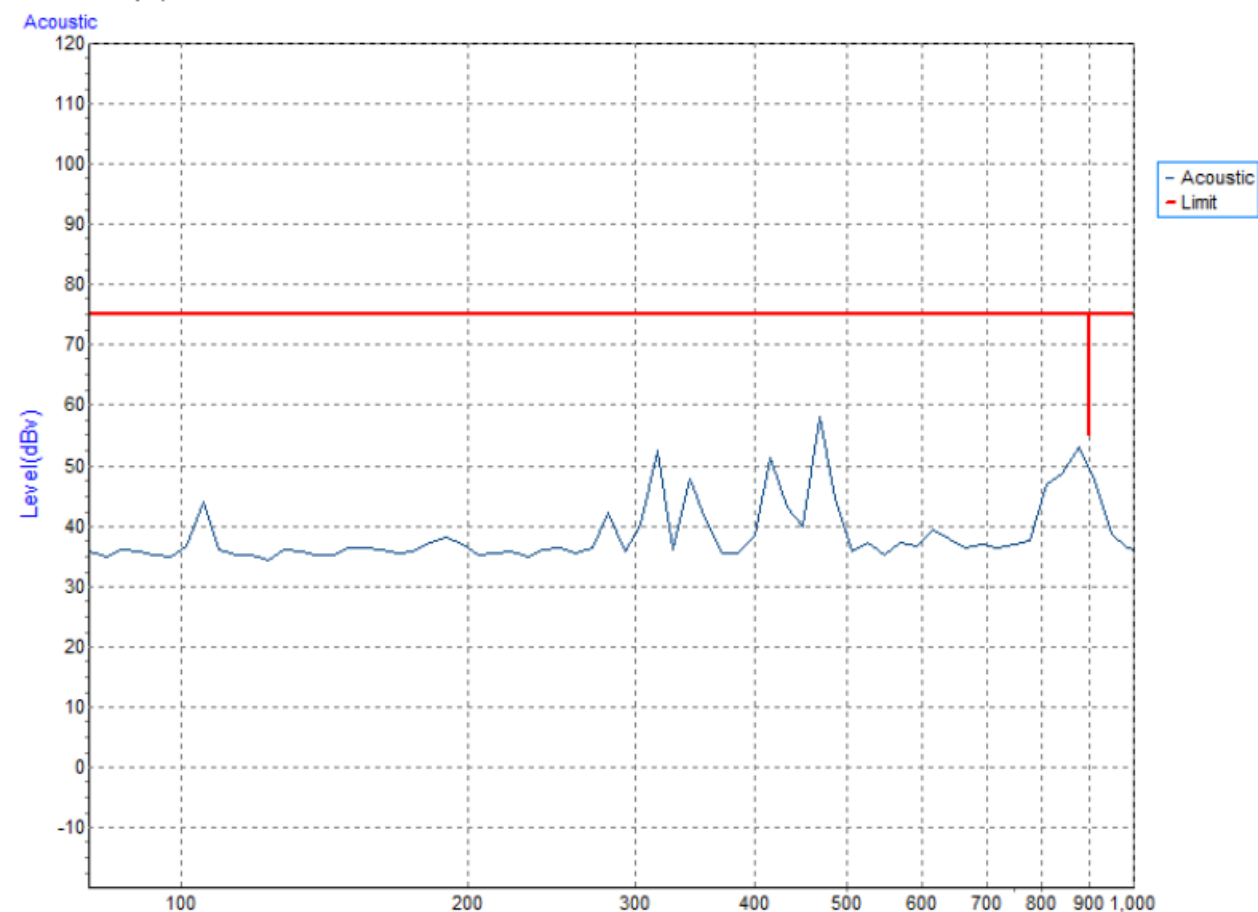

4.5 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST (EFT/BURST)

4.5.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-4
Required Performance	B
Test Voltage	Power Line: ± 0.5 kV, ± 1 kV Signal/Control Line: ± 0.5 kV
Polarity	Positive & Negative
Impulse Frequency	5 kHz: except for xDSL equipment 100 kHz: only for single lines of xDSL equipment.
Impulse Wave shape	5/50 ns
Burst Duration	15 ms
Burst Period	300 ms
Test Duration	Not less than 1 min.

4.5.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Capacitor Clamp	Thermo KeyTek	CCL	0502215	Feb. 24, 2018
2	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Sep. 04, 2017
3	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.5.3 TEST PROCEDURE

The EUT and support equipment(s) are placed on a table that is 0.8 meter high above a metal ground plane and should be located 0.1 m \pm 0.01m high above the Ground Reference Plane (1m*1m min. and 0.65mm thick min).



The other condition as following manner:

- The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

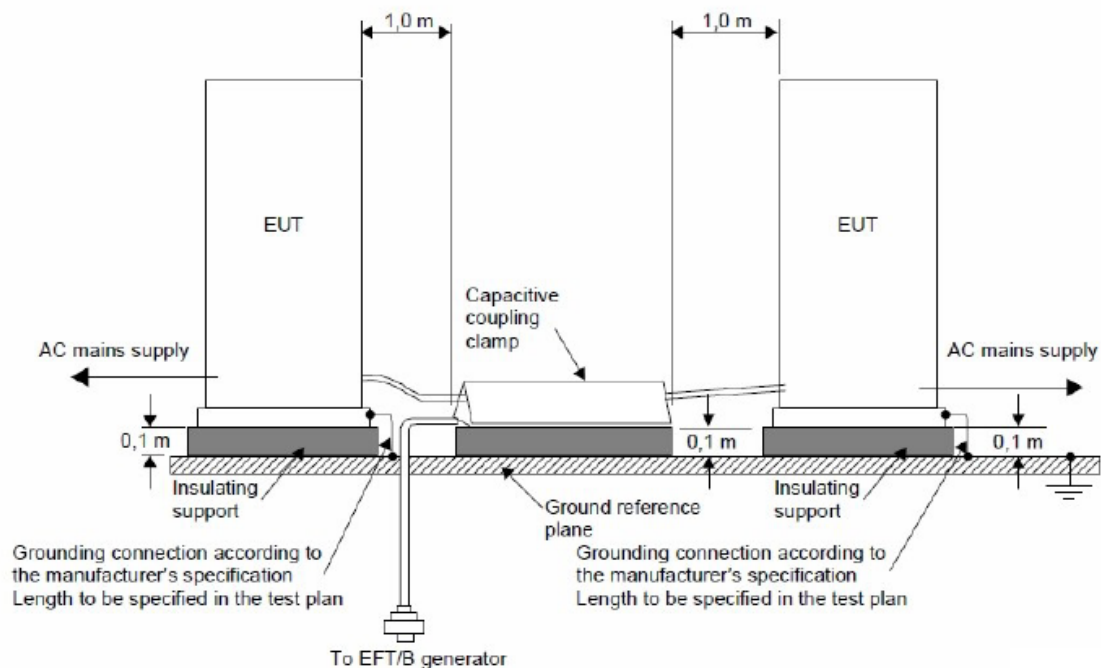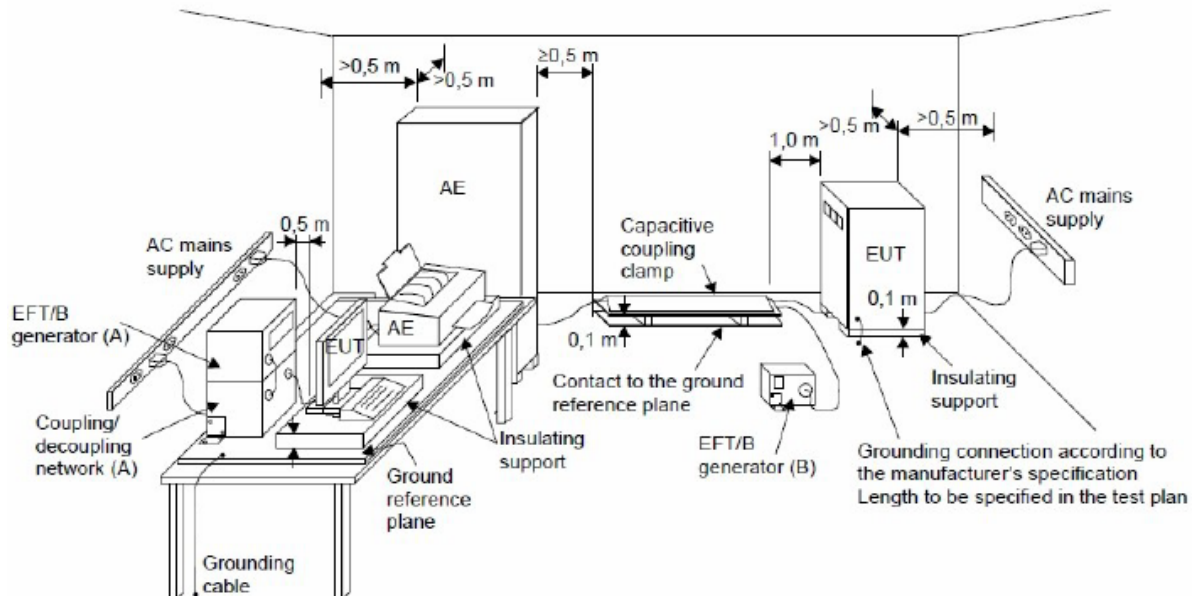

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane and should be located 0.1 m+/- 0.01m above the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in EN 61000-4-4 and its cables were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

4.5.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	49%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (PoE),Handfree+vedio+HDMI out (Adapter),Handset+vedio+HDMI out (Adapter),Earphone+vedio+HDMI out(Adapter),Play vedio+storage R/W+HDMI out(Adapter)		

EUT Ports Tested		Polarity	Repetition Frequency	Test Level 1kV	Criterion	Result	Judgment
AC Power Port	Line (L)	+	5 kHz	A	B	A	PASS
		-	5 kHz	A			
	Neutral (N)	+	5 kHz	A	B	A	PASS
		-	5 kHz	A			
		-	5 kHz	A			

EUT Ports Tested		Polarity	Repetition Frequency	Test Level 0.5 kV	Criterion	Result	Judgment
Signal/Data/ Control Port	RJ-45	+	5 kHz	B	B	B	PASS
		-	5 kHz	B			

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

4.6 SURGE IMMUNITY TEST

4.6.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-5
Required Performance	B
Wave-Shape	Combination Wave for power lines 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage	Power Line: ± 0.5 kV, ± 1 kV
Surge Input/Output	L-N
Generator Source Impedance	2 ohm between networks 12 ohm between network and ground
Polarity	Positive/Negative
Phase Angle:	AC Port: 0°/90°/180°/270°
Pulse Repetition Rate	1 time / min. (maximum)
Number of Tests	5 positive and 5 negative at selected points

4.6.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	System mainframe	Schaffner	NSG 2050	200729-619L U	Sep. 04, 2017
2	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Sep. 04, 2017
3	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A
4	Measurement Software	Schaffner	Win 2000 Version V7.10	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.6.3 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT :

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT :

The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

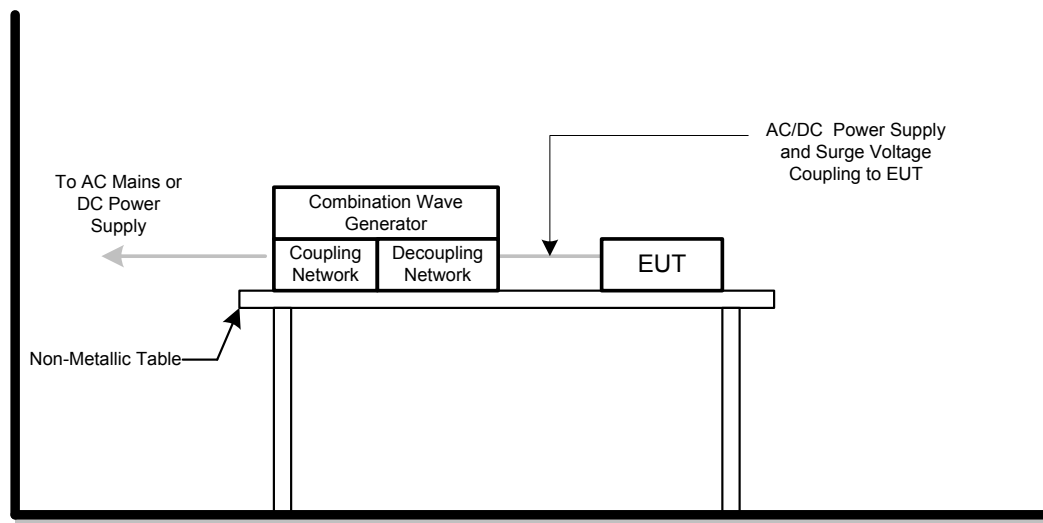

4.6.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

Wave Form EUT Ports Tested		1.2/50(8/20)Tr/Thμs						Criterion	Result	Judgment
		Polarity	Phase	Voltage						
				0.5kV	1kV	-- kV	-- kV			
AC	L – N (2 ohm)	+/-	0°	A	A	-	-	B	A	PASS
		+/-	90°	A	A	-	-			
		+/-	180°	A	A	-	-			
		+/-	270°	A	A	-	-			

Note:

- 1) Polarity and Numbers of Impulses: 5 Pst / Ngst at each tested mode
- 2) N/A - denotes test is not applicable in this Test Report
- 3) Criterion A: No observation of any performance degradation.
- 4) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 5) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

4.7 IMMUNITY TO CONDUCTED DISTURBANCES, INDUCED BY RADIO-FREQUENCY FIELDS TEST (CS)

4.7.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-6
Required Performance	A
Frequency Range	0.15 MHz - 80 MHz
Field Strength	3 V (unmodulated, r.m.s.)
Modulation	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step	1% of fundamental
Dwell Time	at least 3 seconds

4.7.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	TOYO	IM5/C Ver 3.7.028	N/A	N/A
2	Power CDN	FCC	FCC-801-M2/M3-16A	100270	Mar. 26, 2018
3	Power Amplifier	Teseq	CBA230M-080	T43748	Mar. 26, 2018
4	Signal Generator	HP	8648A	3636A02964	Mar. 26, 2018
5	Measurement Software	Farad	EZ-CS?(V2.0.1.2)	N/A	N/A
6	Signal Line CDN	FCC	F-090407-1004-1	100518	Mar. 26, 2018
7	Audio Test System	Audio precision	ATS-1ACCESS	ATS1-45376	Mar. 26, 2018
8	Conditioning Amplifier	B&K	_2690__0F2_	2723746	Jun. 27, 2017
9	Free-field 1/2" Microphone	B&K	4190-L-001	2913343	Dec. 23, 2017

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.7.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.


The other condition as following manner:

- The field strength level was 3 V (unmodulated, r.m.s.)
- The frequency range is swept from 150 kHz to 80 MHz, with the signal 80%amplitude modulated with a 1 kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

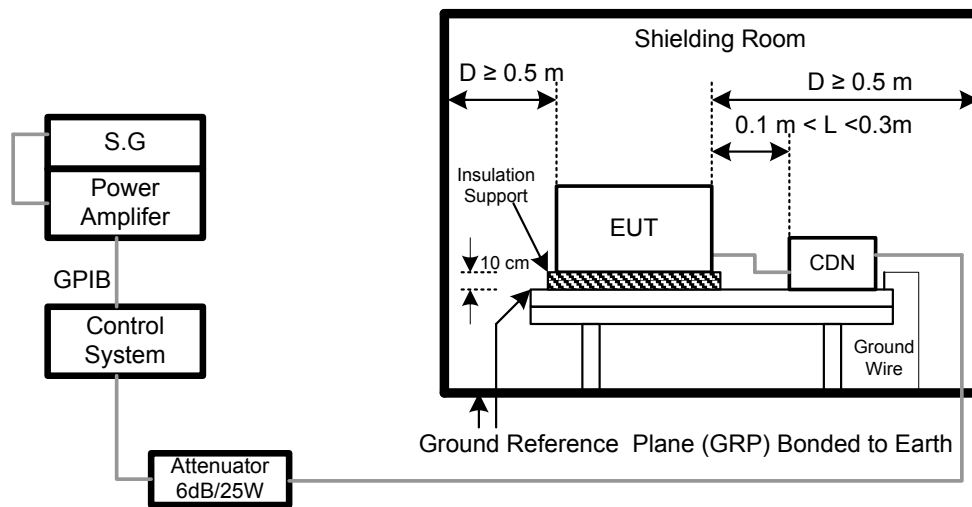

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

4.7.6 TEST RESULTS


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	49%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (PoE),Handfree+vedio+HDMI out (Adapter),Handset+vedio+HDMI out (Adapter),Earphone+vedio+HDMI out(Adapter),Play vedio+storage R/W+HDMI out(Adapter)		

Test Ports (Mode)	Freq.Range (MHz)	Field Strength	Criteria	Results	Judgment
Input/ Output AC.PowerPort	0.15 ---80	3V(unmodulated , r.m.s) AM Modulated 1000Hz, 80%	A	A	PASS
Input/ Output DC. PowerPort	0.15 --- 80		A	N/A	N/A
Signal Line (RJ45:WAN)	0.15 --- 80		A	A	PASS
Signal Line (RJ45:LAN)	0.15 --- 80		A	A	PASS


Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out CDN T8(LAN)		
Note	PoE		

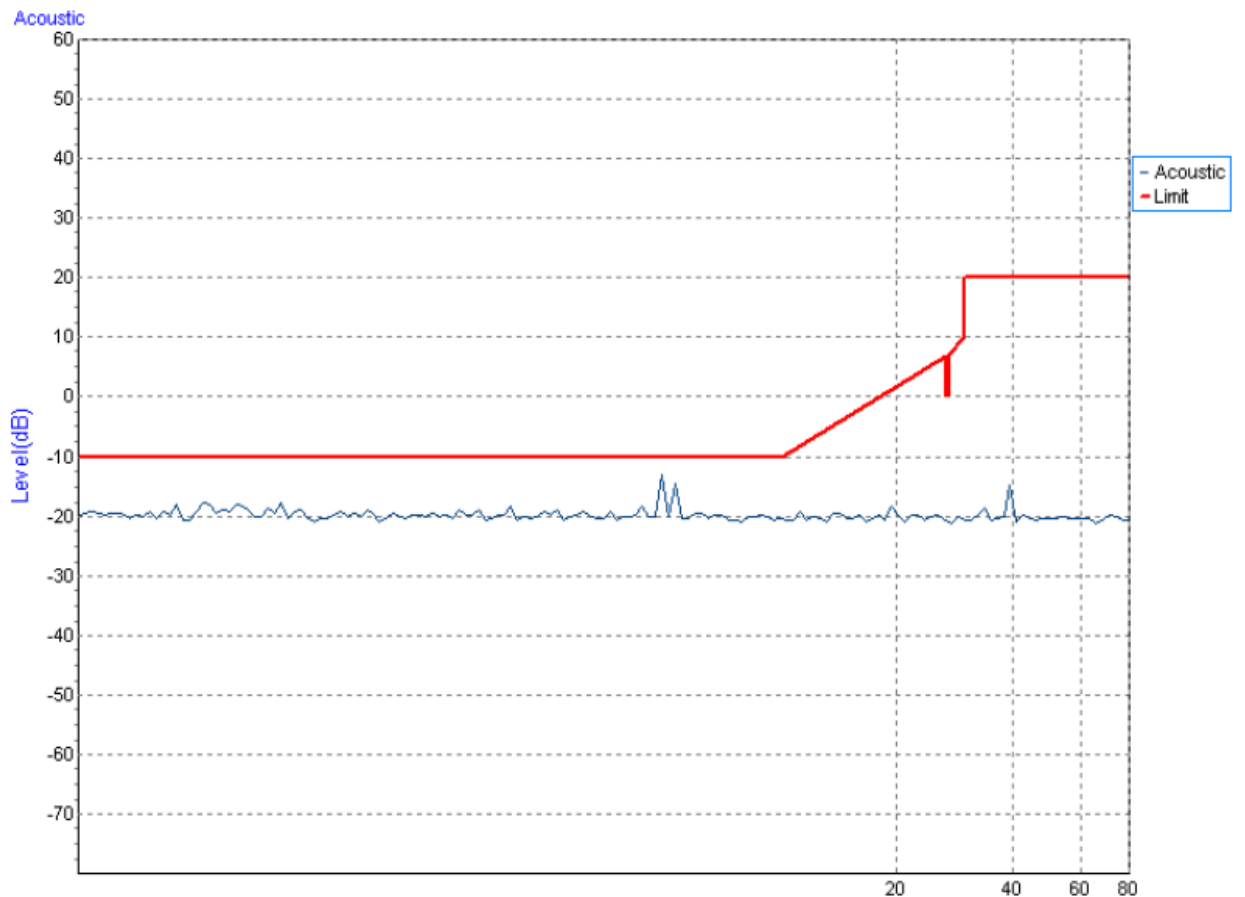


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out CDN T8(LAN)		
Note	PoE		

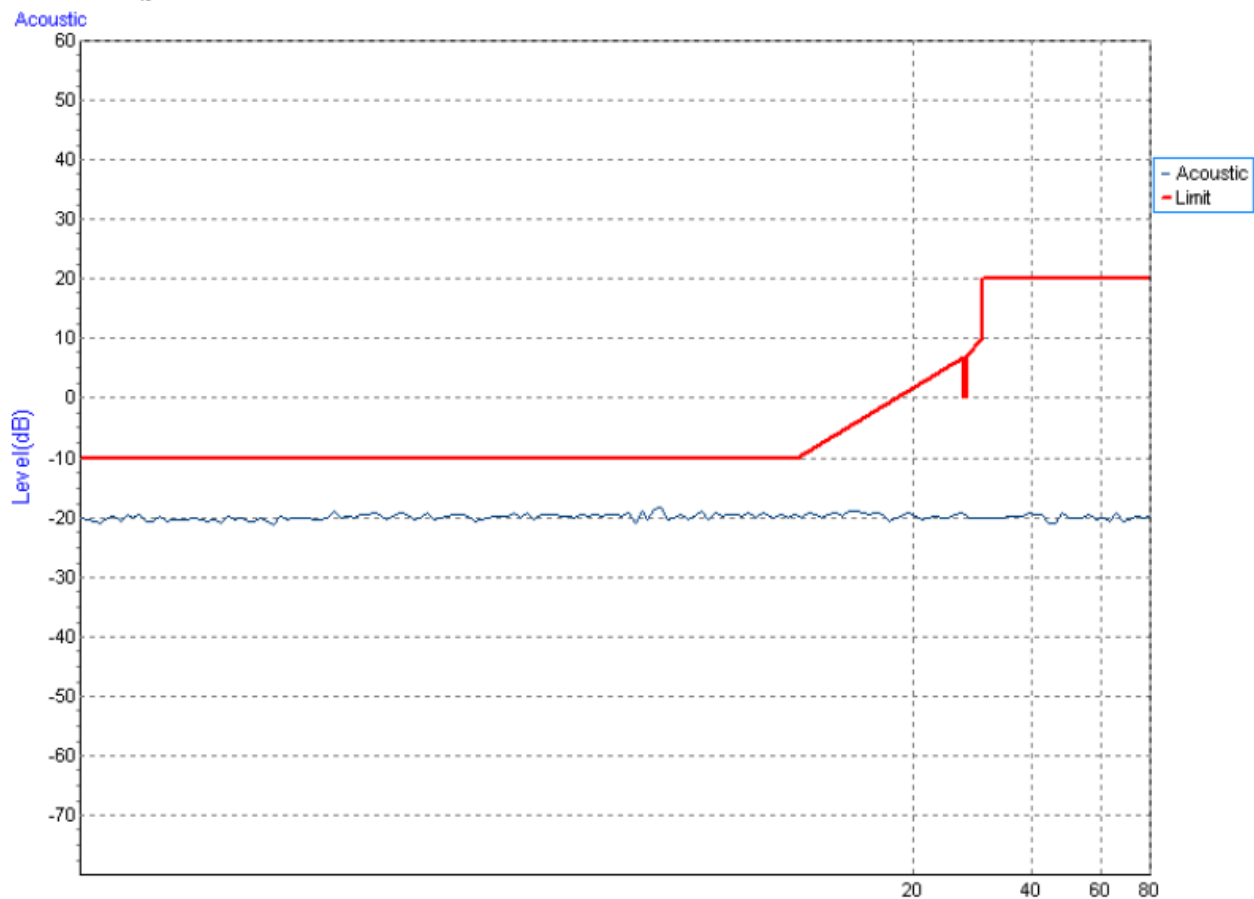


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out CDN T8 (LAN)		
Note	Adapter		

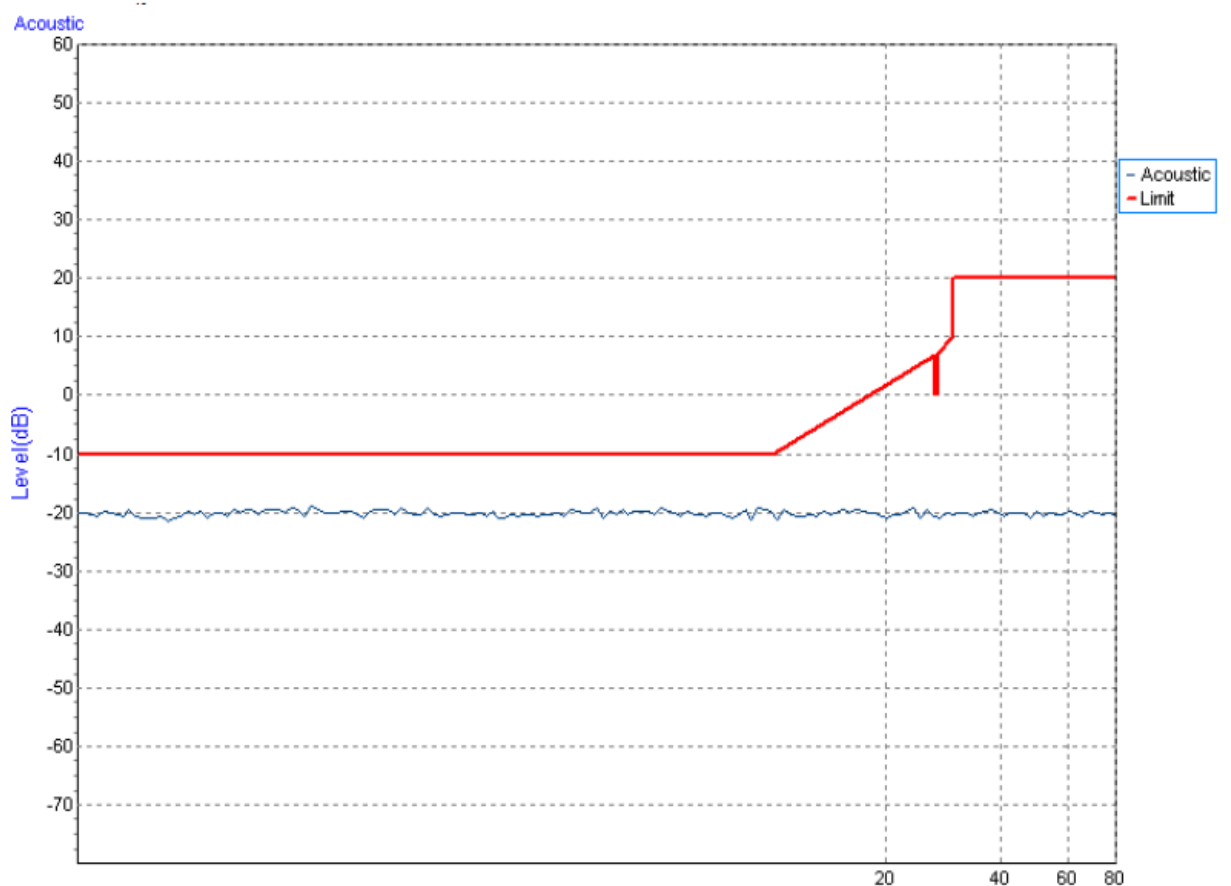


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out CDN T8(WAN)		
Note	Adapter		

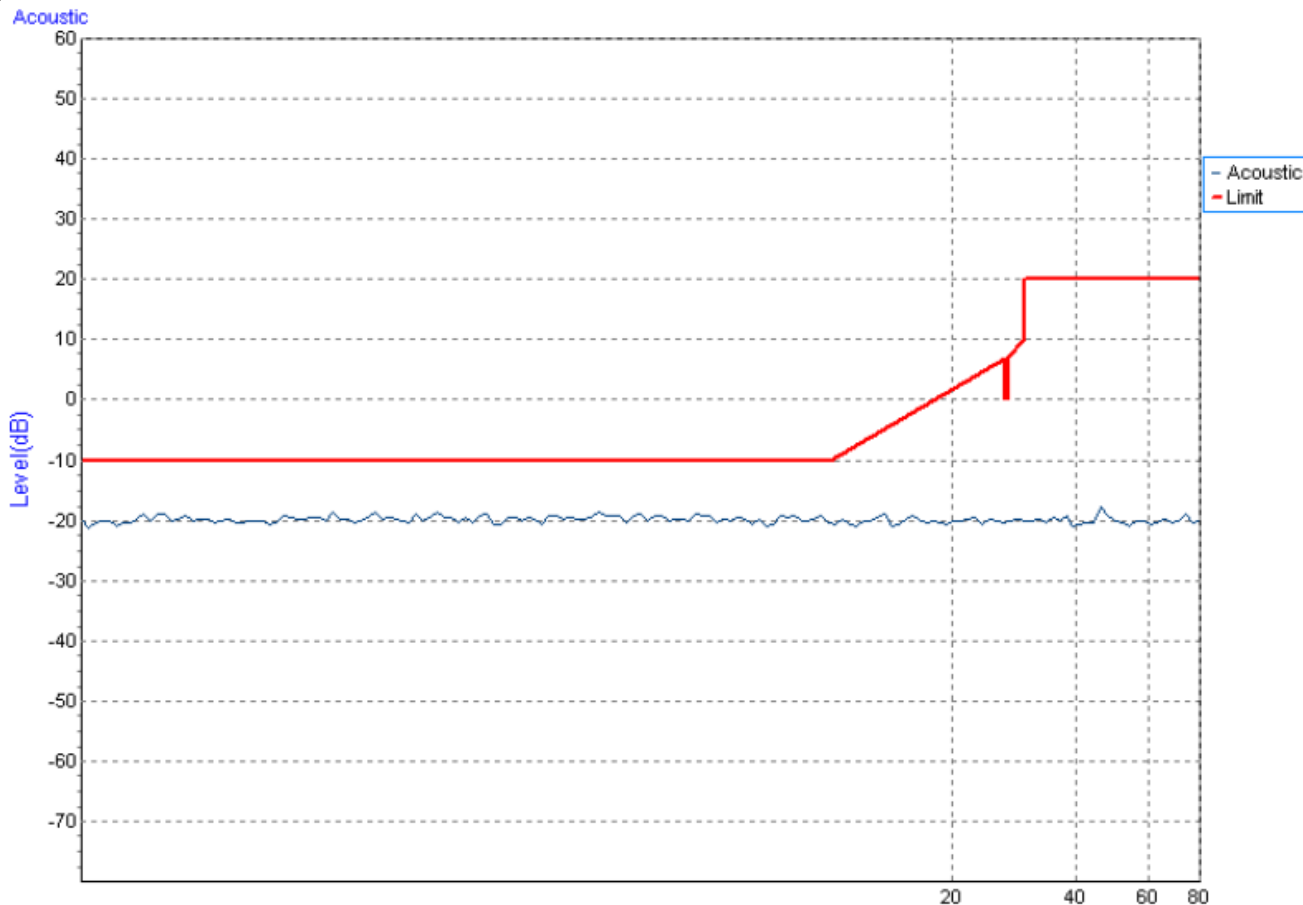


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out CDN M2		
Note	Adapter		

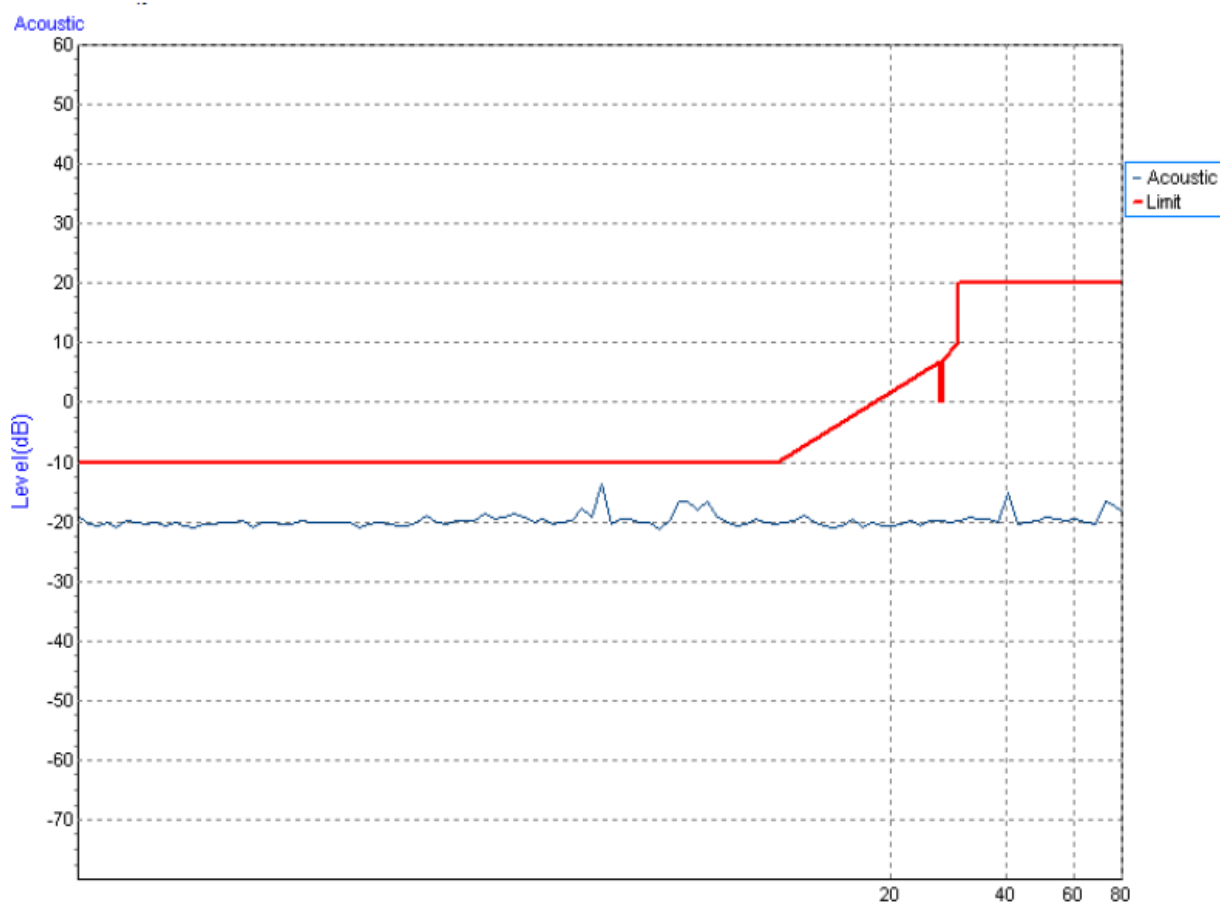


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out (LAN)		
Note	PoE		

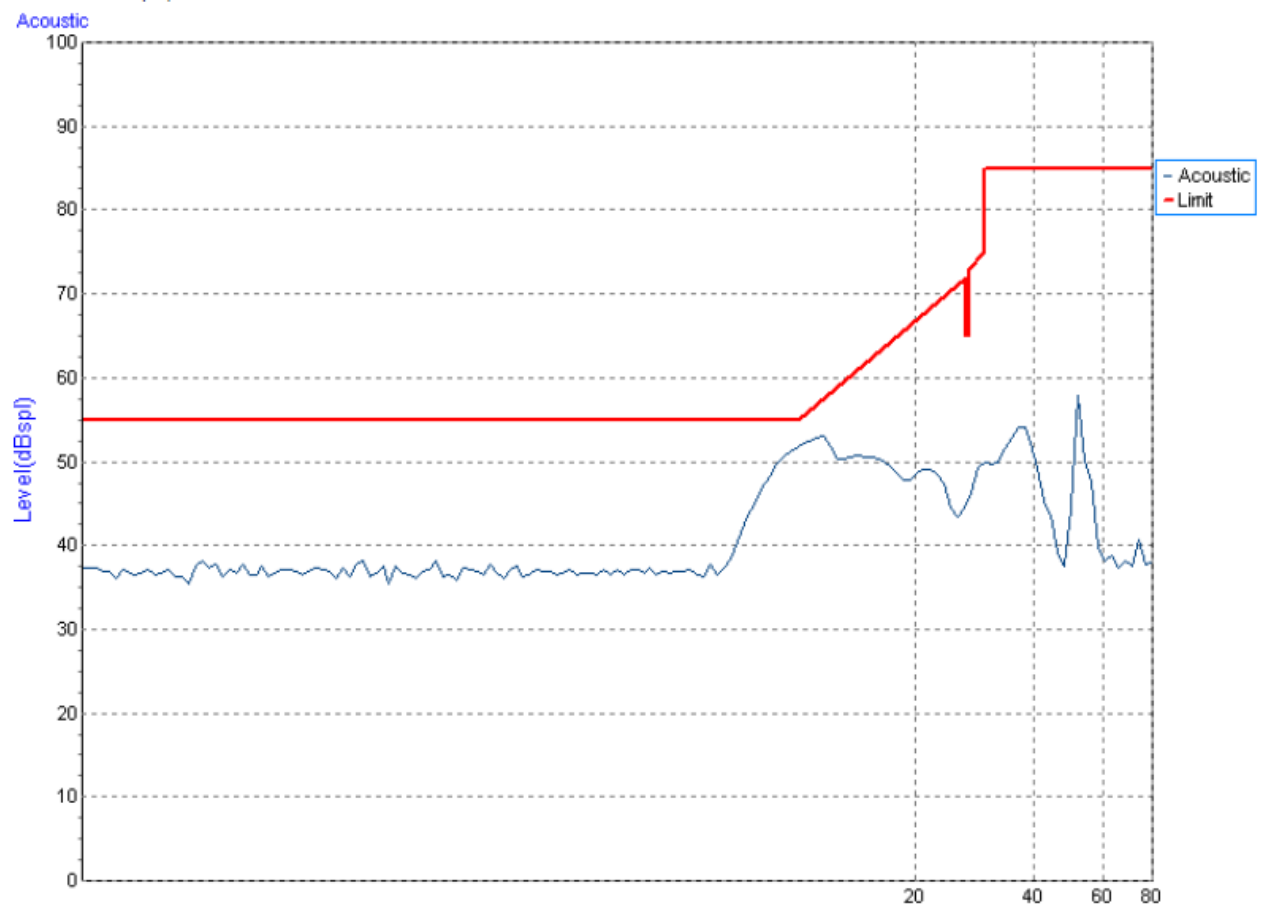


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out CDN T8(WAN)		
Note	PoE		

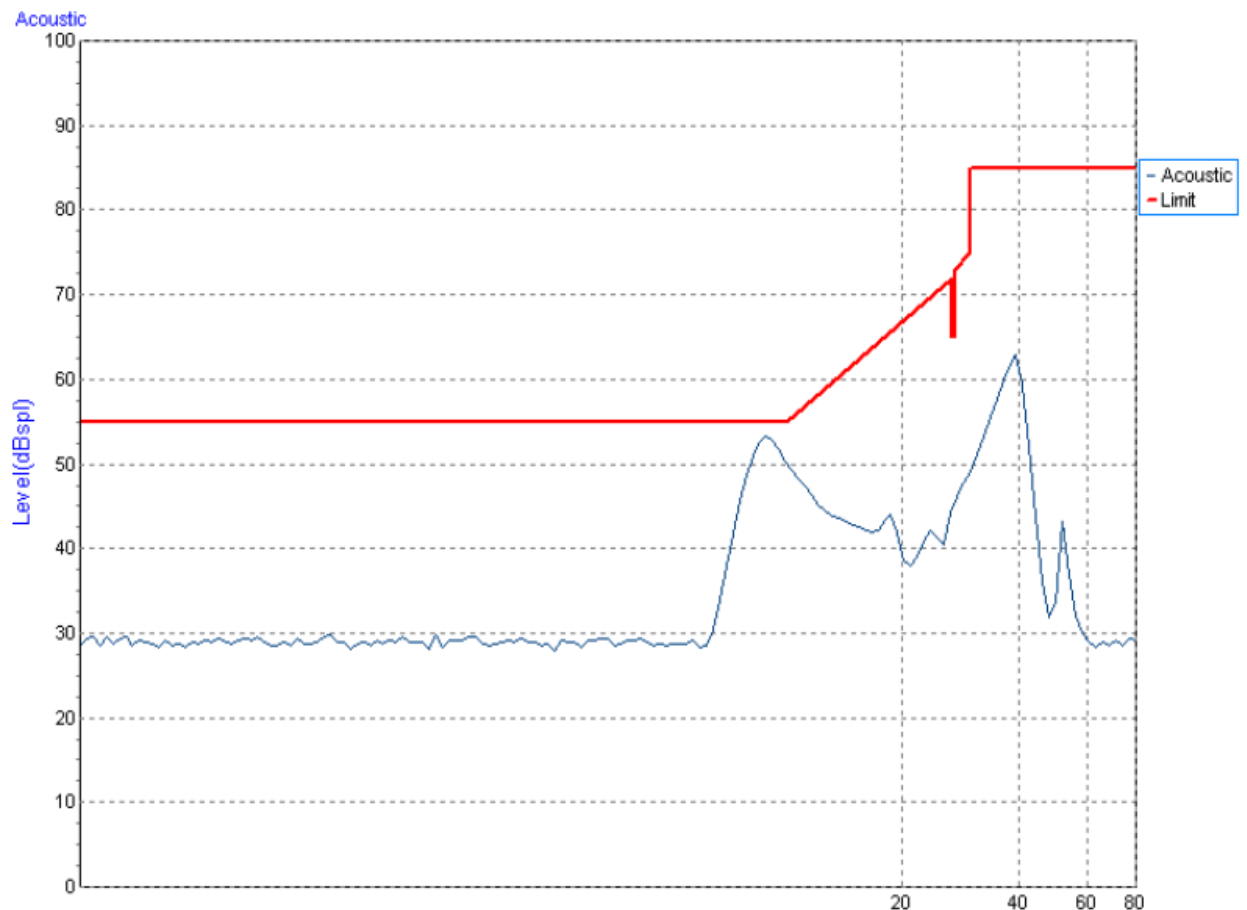


EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out CDN T8 (LAN)		
Note	Adapter		

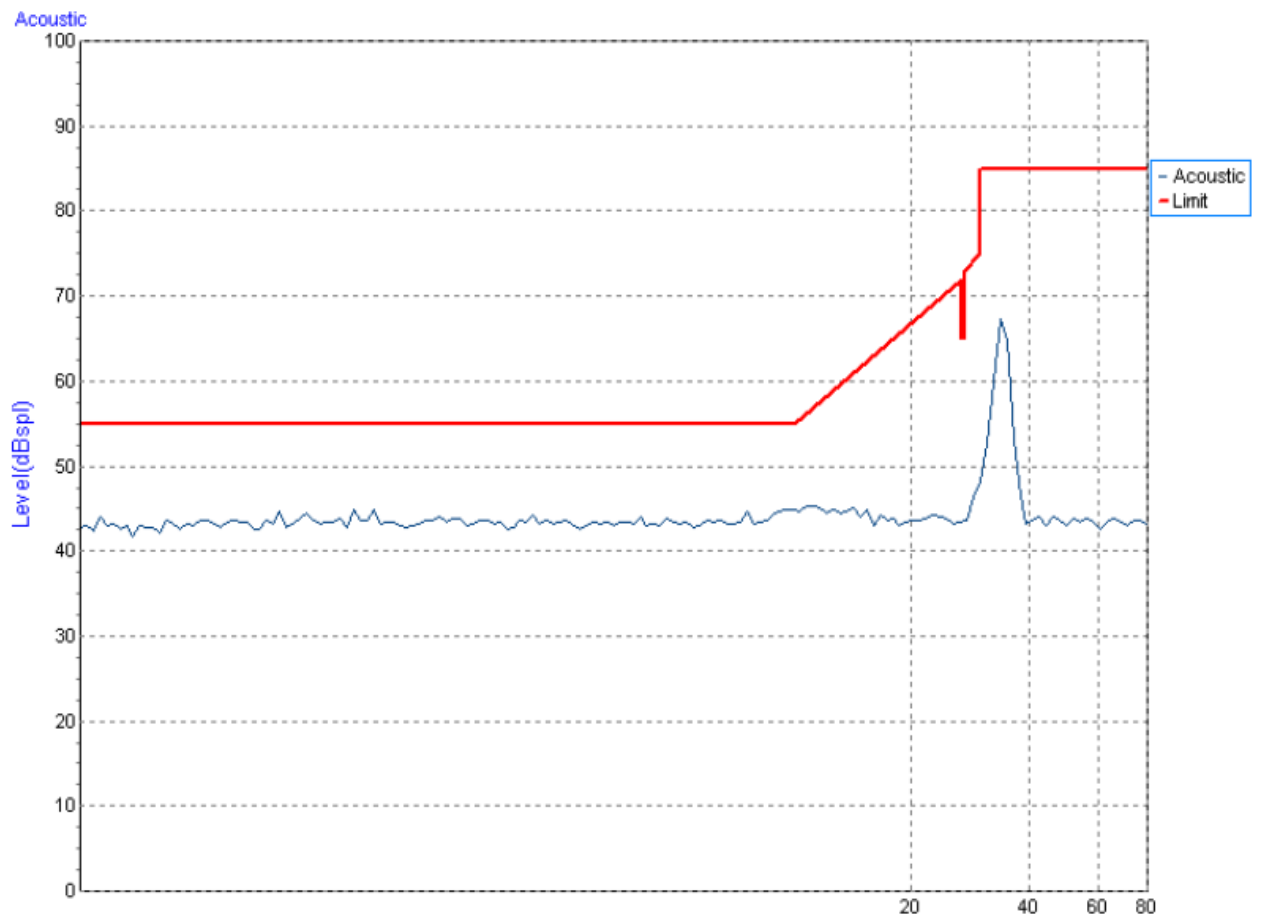

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out CDN T8(WAN)		
Note	Adapter		

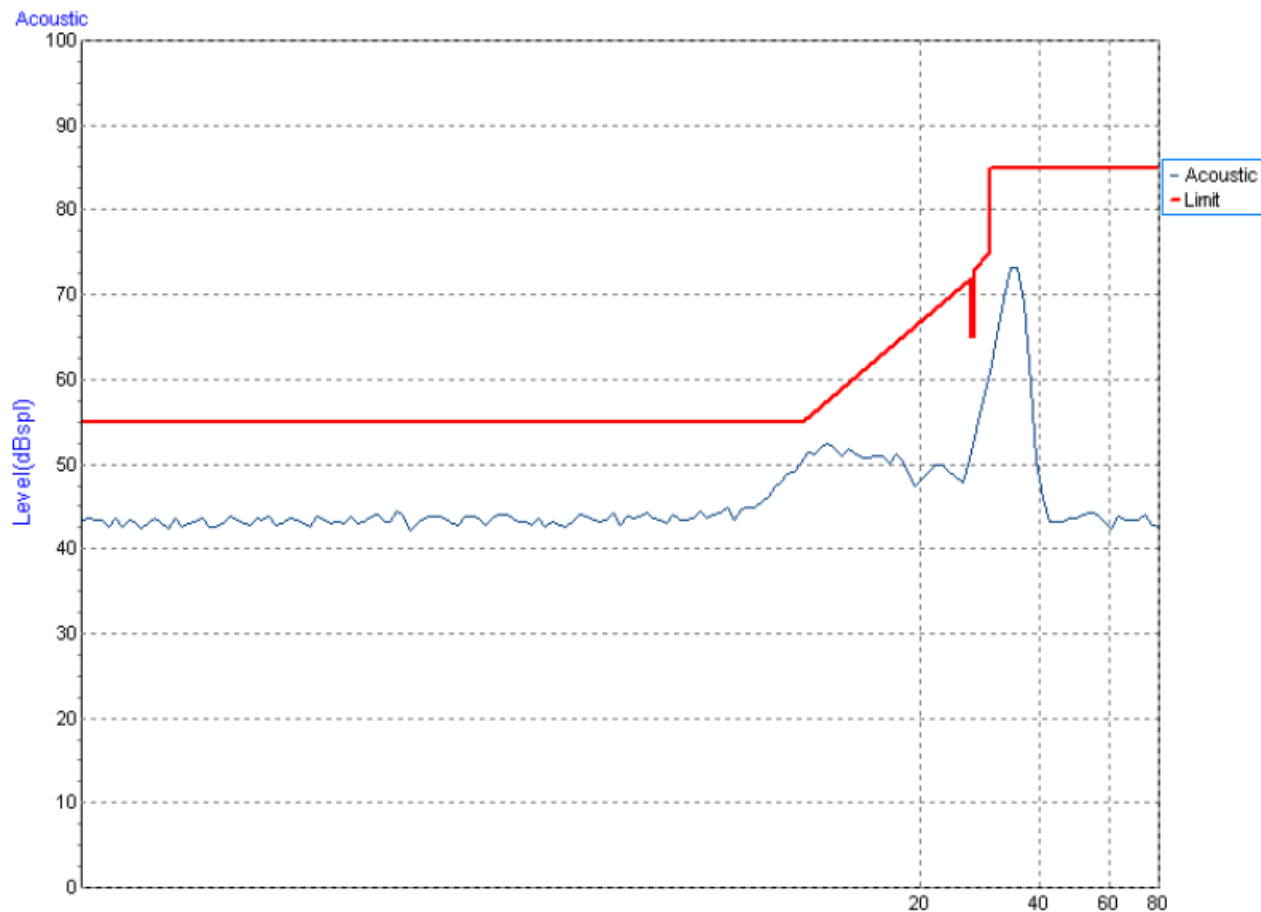

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	55%
Test Voltage	AC 230V/50Hz		
Test Mode	Handset+vedio+HDMI out CDN M2		
Note	Adapter		

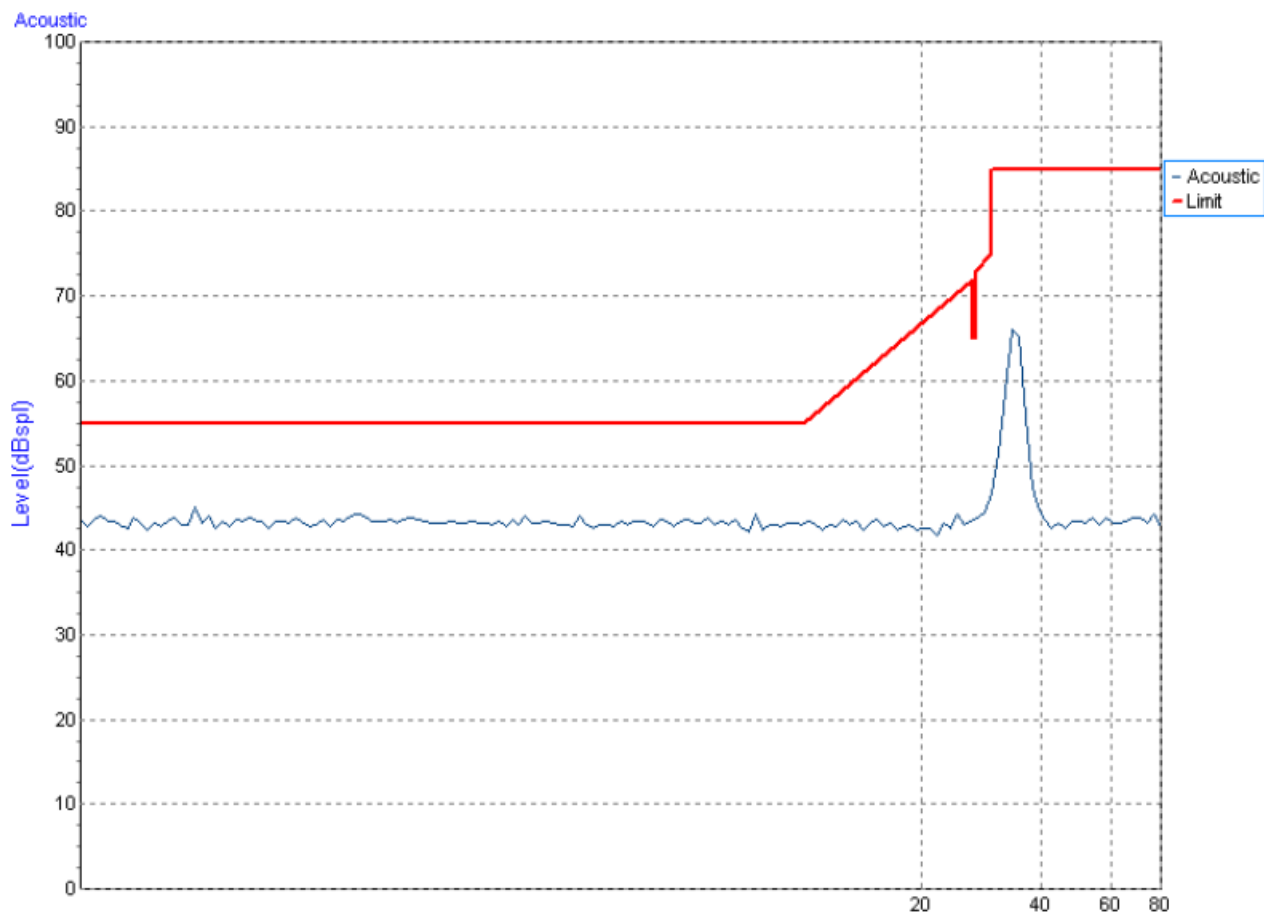

4.8 POWER FREQUENCY MAGNETIC FIELD IMMUNITY TEST (PFMF)

4.8.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-8
Required Performance	A
Frequency Range	50/60 Hz
Field Strength	1 A/m
Observation Time	1 minute
Inductance Coil	Rectangular type, 1mx1m

4.8.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Magnetic Field test Generator	FCC	F-1000-4-8-G-125A	04032	Mar. 26, 2018
2	Magnetic Field immunity loop	Thermo KeyTek	F-1000-4-8/9/10-L-1M	04024	Mar. 26, 2018

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.

4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.


The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

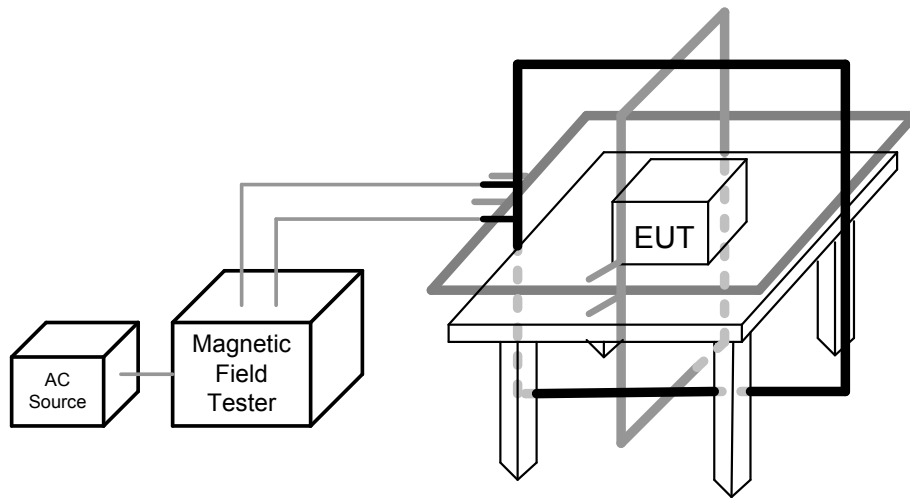

Note:

TABLE-TOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 percent of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

4.8.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	52%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (PoE),Handfree+vedio+HDMI out (Adapter),Handset+vedio+HDMI out (Adapter),Earphone+vedio+HDMI out(Adapter),Play vedio+storage R/W+HDMI out(Adapter)		

50Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results	Judgment
Enclosure	1 A/m	X	60	A	A	PASS
Enclosure	1 A/m	Y	60	A	A	PASS
Enclosure	1 A/m	Z	60	A	A	PASS

60Hz

Test Mode	Test Level	Antenna aspect	Duration (s)	Criteria	Results	Judgment
Enclosure	1 A/m	X	60	A	A	PASS
Enclosure	1 A/m	Y	60	A	A	PASS
Enclosure	1 A/m	Z	60	A	A	PASS

Note:

- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

4.9 VOLTAGE DIPS, SHORT INTERRUPTIONS AND VOLTAGE VARIATIONS IMMUNITY TEST

4.9.1 TEST SPECIFICATION

Basic Standard	EN 61000-4-11
Required Performance	B (For >95% Voltage Dips) C (For 30% Voltage Dips) C (For >95% Voltage Interruptions)
Test Duration Time	Minimum three test events in sequence
Interval between Event	Minimum ten seconds
Phase Angle	0°/180°
Test Cycle	3 times

4.9.2 MEASUREMENT INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	THE MODULAR SOLUTION FOR 6 KV APPLICATIONS	Teseq	NSG 3060	1423	Sep. 04, 2017
2	Measurement Software	Teseq	Win 3000 Version 1.2.0	N/A	N/A

Remark: "N/A" denotes no model name, no serial No. or no calibration specified.

All calibration period of equipment list is one year.


4.9.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.9.4 DEVIATION FROM TEST STANDARD

No deviation

4.9.5 TEST SETUP

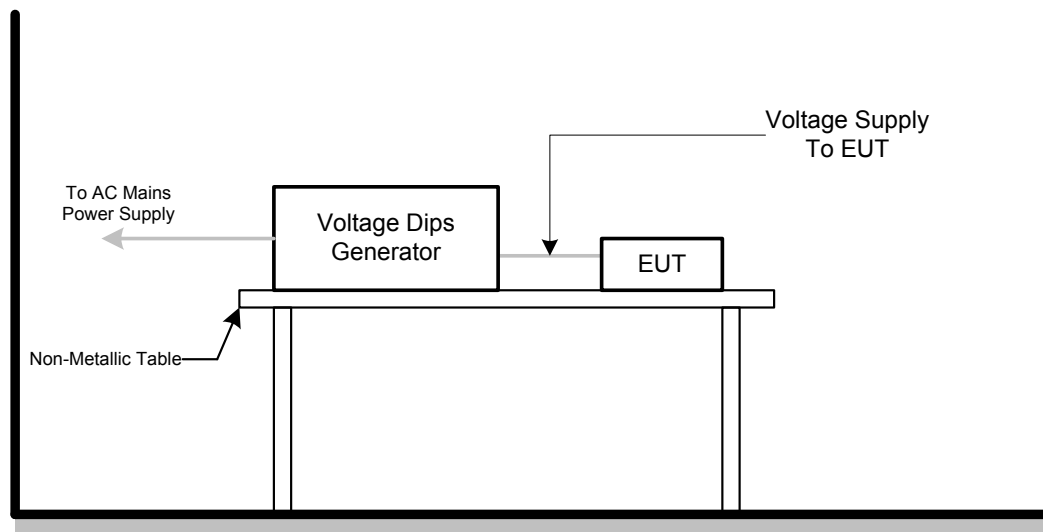

4.9.6 TEST RESULTS

EUT	IP Phone	Model Name	XT-30G
Temperature	25°C	Relative Humidity	50%
Test Voltage	AC 230V/50Hz		
Test Mode	Handfree+vedio+HDMI out (Adapter)		

AC 100V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip >95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption>95%	250	C	C	PASS

AC 230V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip >95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption>95%	250	C	C	PASS


AC 240V/50Hz				
VoltageReduction	Periods	Criteria	Results	Judgment
Voltage dip >95%	0.5	B	A	PASS
Voltage dip 30%	25	C	A	PASS
Interruption>95%	250	C	C	PASS

Note:


- 1). N/A - denotes test is not applicable in this test report.
- 2) Criterion A: No observation of any performance degradation.
- 3) Criterion B: Some degradation of performance is observed but the equipment continues to operate as intended.
- 4) Criterion C: Loss of functionality, but self-recoverable by user, without loss of information or settings.

5. EUT TEST PHOTO


Radiated emissions up to 1 GHz
Adapter Mode

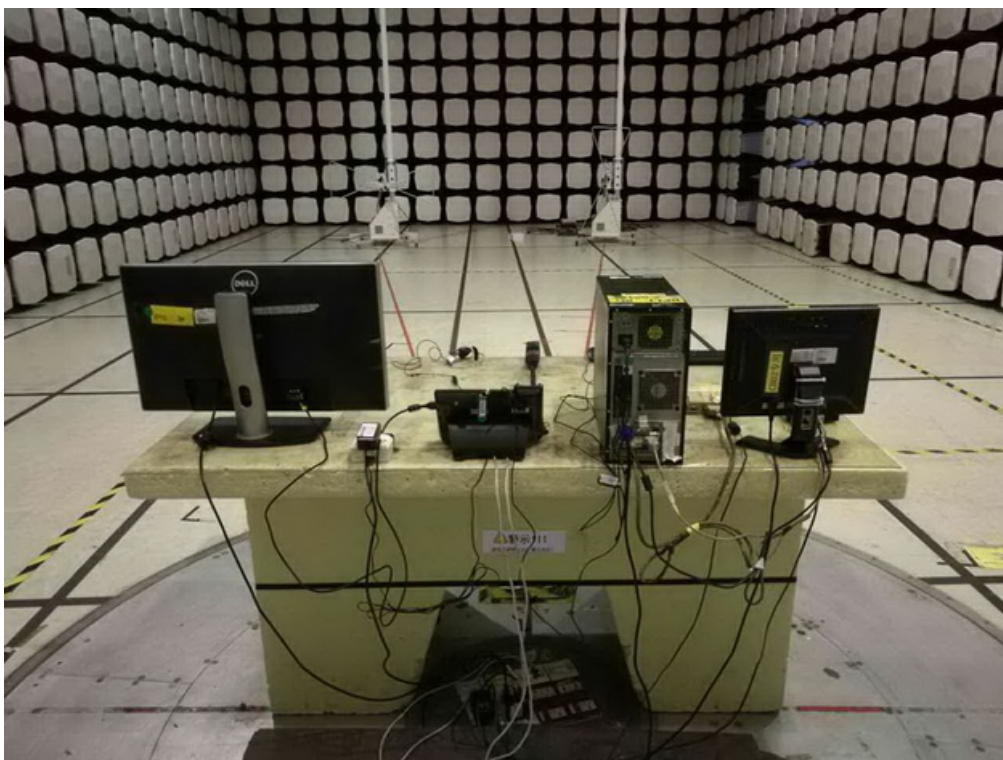

PoE Mode

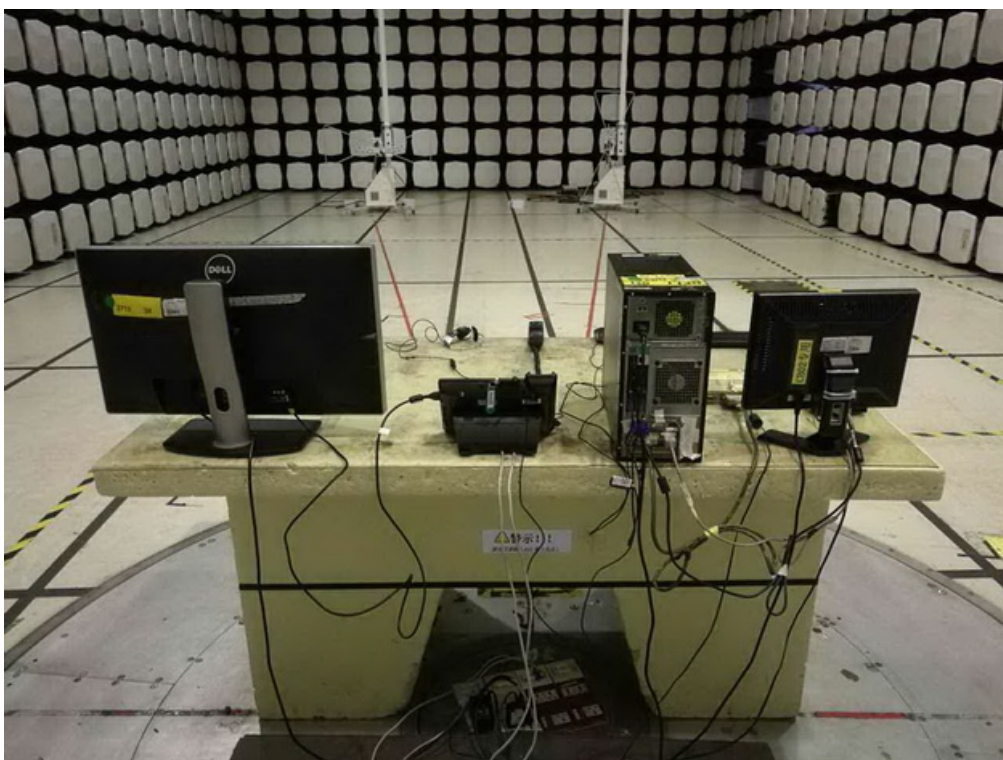


Radiated emissions above 1 GHz Adapter Mode

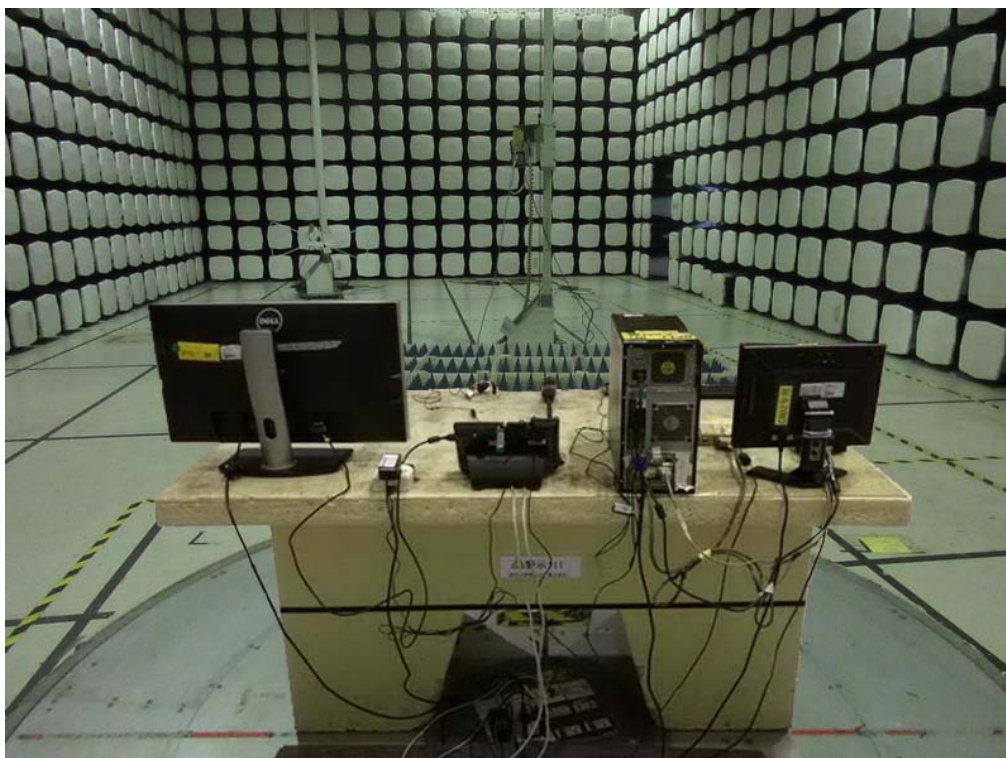

PoE Mode



Conducted emissions AC mains power port

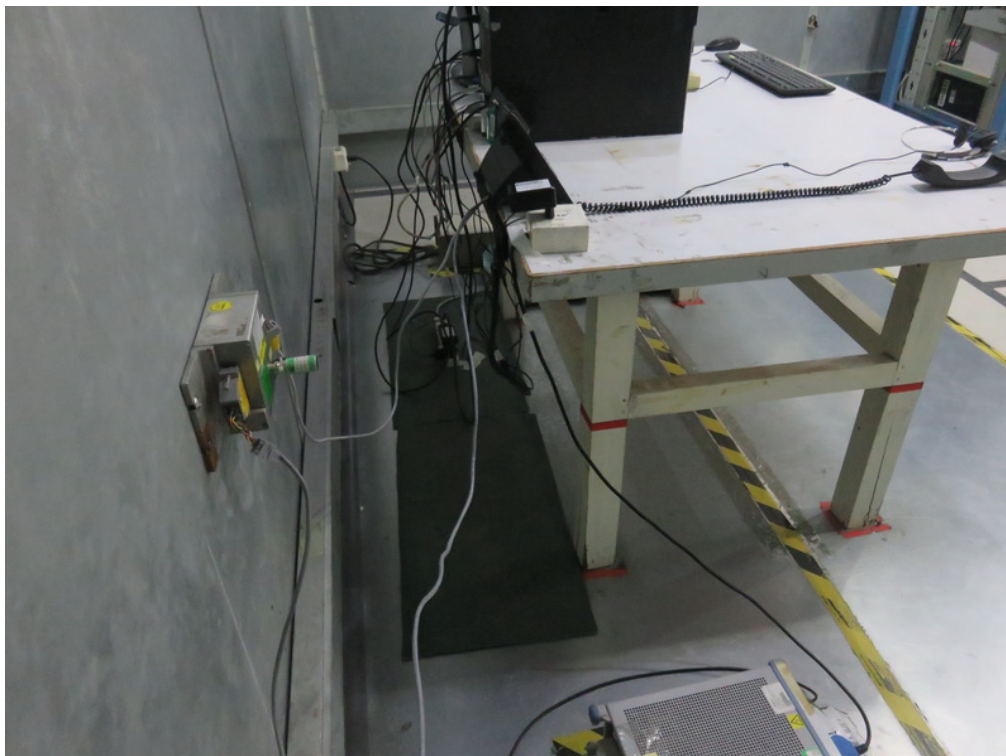

Asymmetric mode conducted emissions_AAN

